
67997-210HLF - BergStik® : **Unshrouded Header, Through** Hole, Double Row, 10 Positions, 2.54 mm Pitch, Vertical, 5.84 mm (0.23 in.) Mating, 3.05 mm (0.12 in.) Tail









# **Mating Half**

№87606-305LF

№76342-305LF

№89898-305LF


№71609-305LF

# **Specifications**

## General

Number of contacts (per row)       5         Number of contacts (Total)       10         Number of rows       2         Orientation       Vertical         Packaging       Bulk Packaging         Attachment type (Board)       Through Hole         Series Number       67997	
Number of rows2OrientationVerticalPackagingBulk PackagingAttachment type (Board)Through HoleSeries Number67997	
OrientationVerticalPackagingBulk PackagingAttachment type (Board)Through HoleSeries Number67997	
Packaging  Attachment type (Board)  Series Number  Bulk Packaging  Through Hole  67997	
Attachment type (Board)  Series Number  Through Hole  67997	
Series Number 67997	
B' ' 1	
Dimensional	
Length (Mating pin) 5.84 mm (0.23 in.)	
Length (Overall pin) 11.43 mm (0.45 in.)	
<b>Length (Tail)</b> 3.05 mm (0.12 in.)	
Electrical	
Current rating 3 amp Continuous	
Resistance (Insulation) 5000 M-ohms	
Voltage rating 1500V AC rms	
Mechanical	
Retention force 8.88N (2 lbf)	
Mounting	
Retention feature (Board) No	
Vapor-phase	
Solder process  IR Reflow Soldering Processes	
Compatible with Wave	

Physical Color (Housing)	Black
Material (Contact)	Phospor Bronze
Material (Housing)	High Temperature Black Thermoplastic
Plating (Contact area)	0.38 μm (15 μin.) Gold or GXT
Plating (Tail)	0.38 μm (15 μin.) Gold or GXT, or Tin
Underplating (Contact)	1.27 μm (50 μin.) Nickel
Flammability rating	UL 94 V-0
Temperature (Range)	-65°C to +125°C
Approvals / Certifications	
UL File Number	E66906
CSA File Number	LR46923
Approvals / Certifications	UL and CSA Approved
Other Features	
Comments	Sample Kit 950501-016
Literature	950559-001

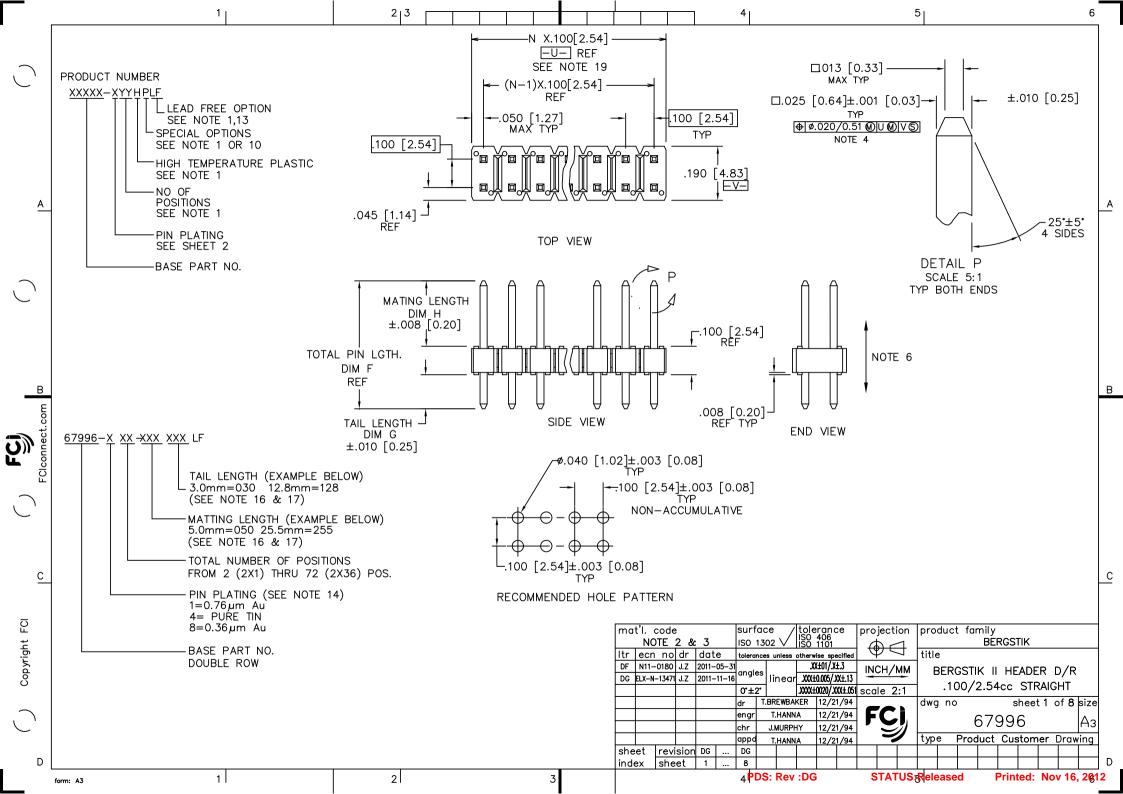

7. MILIT	ARY BERGSTIK HEADER
P/N	XXXXX-XYY-MIL
NOT	AVAILABLE.

- 8. ±.010/0.25 TOL APPLIES TO ALL "G" TAILS EXCEPT INDICATED PARTS ON TABLE WHERE +.010/0.25 -.000/0.00 APPLIES.
- 9. NOTCH CONFIGURATION WILL VARY PER VENDOR'S DISCRETION.
- 10. BERGSTRIP™ PART NUMBERS FOLLOWED BY BY A "B" ARE BULK PRICED.
- 11. TAIL LENGTH (DIM. G) TO BE ±.008/.0.20.
- 12. POSITIONS PER ROW 37 TO 50 CAN BE PRODUCED, BUT FLATNESS AND CURVATURE MAY NOT BE HELD AS CLOSE AS 36 POSITIONS.
- 13. THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- 14. PLATING OPTIONS:
  PERFORMANCE PLATING WILL BE EITHER GOLD OR GXT ON POST OR TAIL,
  OPTIONALLY (78~295u"/2~7.5u) TIN ON TAIL.
- 15. "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT FNVIRONMENTS."
- 16. THE OAL DON'T EXCEED 34.5mm
- 17. INCREMENTS BY 0.1mm IN LENGTHS ONLY
- 18. FOR SPECIAL PACKAGING REQUEST PLEASE CONTACT PRODUCT MANAGER FOR AVAILABILIT
- 19. TO DETERMINE DIMENSIONS: N=NUMBER OF POSITION PER ROW EXAMPLE: 10 POS. N X .100/2.54

PIN PLATING CODES:									
XXXXX-1YY	30u"/0.76u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni								
XXXXX-2YY	15u"/0.38u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni								
XXXXX-3YY	50u"/1.27u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni								
XXXXX-4YY	100u"/2.54u MIN Sn OVER 50u"/1.27u MIN Ni (SEE NOTE 15)								
XXXXX-4YYHLF	1000 / 2.340 MIN 311 OVER 300 / 1.270 MIN NI (SEE NOTE 13)								
XXXXX-5YY	15u"/0.38u MIN (	SEE NOTE 14) OVER	50u"/1.27u M	IIN Ni					
XXXXX-6YY	30u"/0.76u MIN (	SEE NOTE 14) OVER	50u"/1.27u N	IIN N	i				
XXXXX-7YY	30u"/0.76u MIN (	SEE NOTE 14) OVER	50u"/1.27u N	AIN N	i				
XXXXX-8YY	15u"/0.38u MIN (	SEE NOTE 14) OVER	50u"/1.27u N	AIN NI	i				
XXXXX-9YY	15u"/0.38u MIN (	SEE NOTE 14) OVER	50u"/1.27u M	IIN Ni					
XXXXX-0YY	30u"/0.76u MIN (	SEE NOTE 14) OVER	50u"/1.27u M	IIN Ni					

#### NOTES

Α

 PART NUMBER OPTIONS: PIN PLATING CODES (SEE ABOVE)

HIGH TEMPERATURE MATERIAL:

PART NUMBERS WITH AND WITHOUT "H" WILL BE SUPPLIED WITH HIGH TEMPERATURE PLASTIC.

NUMBER OF POSITIONS:

EVEN NUMBER OF POSITIONS FROM 2 (2X1) THROUGH 72 (2X36). -X00H INDICATES BERGSTRIP PRODUCT. SEE PAGE 3 FOR SPECIAL GEOMETRY OF THIS CONTINUOUS STRIP PRODUCT. AUTOMATED REELS WILL CONTAIN 45,000 PINS. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.

### PACKAGING:

PACKAGED IN POLY BAGS.

EIGHT DIGIT PART NUMBERS FOLLOWED BY A "T" ARE PACKAGED IN TUBES. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.

EIGHT DIGIT PART NUMBERS FOLLOWED BY A "G" ARE PACKAGED IN GPAX FOR IBM ONLY. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.

PART NUMBERS FOLLOWED BY A "C" ARE PACKAGED IN TUBES WITH A PICKUP CAP APPLIED.

EIGHT DIGIT PART NUMBERS FOLLOWED BY A "A" ARE PACKAGED 16 IN TAPE/REEL WITH PICKUP CAP P/N 95730-003 APPLIED, PER BUS-14-345.

LEAD FREE:

ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION, NOT AVAILABLE FOR -5YY, -5YYH, -6YY & -6YYH

2. BODY MATERIAL:

BODY MATERIAL: MANUFACTURER'S OPTION OF NYLON, PCT GLASS FIBER REINFORCED OR MINERAL FILLED LCP FLAME RETARDENT PER UL-94V-O. COLOR: BLACK

BERGSTRIP™PRODUCED WITH HIGH TEMPERATURE LCP THERMOPLASTIC, FLAME RETARDENT PER UL-94V-O. COLOR: BLACK

PART NUMBERS WITH "H" AND WITHOUT SUFFIX WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

mat'l. code surface tolerance projection product family NOTE 2 & 3 ISO 1302 V BERGSTIK Itr ecn no dr date title tolerances unless otherwise specified .XX±01/.X±.3 INCH/MM BERGSTIK II HEADER D/R angles linear XXX±0.005/XX±.13 .100/2.54cc STRAIGHT .XXXX±0020/.XXX±.051 scale 2:1 0°±2° T.BREWBAKER 12/21/94 dwg no sheet 2 of 8 size 12/21/94 T.HANNA engr 67996 chr J.MURPHY 12/21/94 Product Customer Drawing appd 12/21/94 type T.HANNA sheet revision index sheet 4 PDS: Rev :DG STATUS:Released Printed: Nov 16, 2012

Copyright

D

С

form: A3 1 2

