




Connectors > Lighting Connectors > Poke-In Connectors

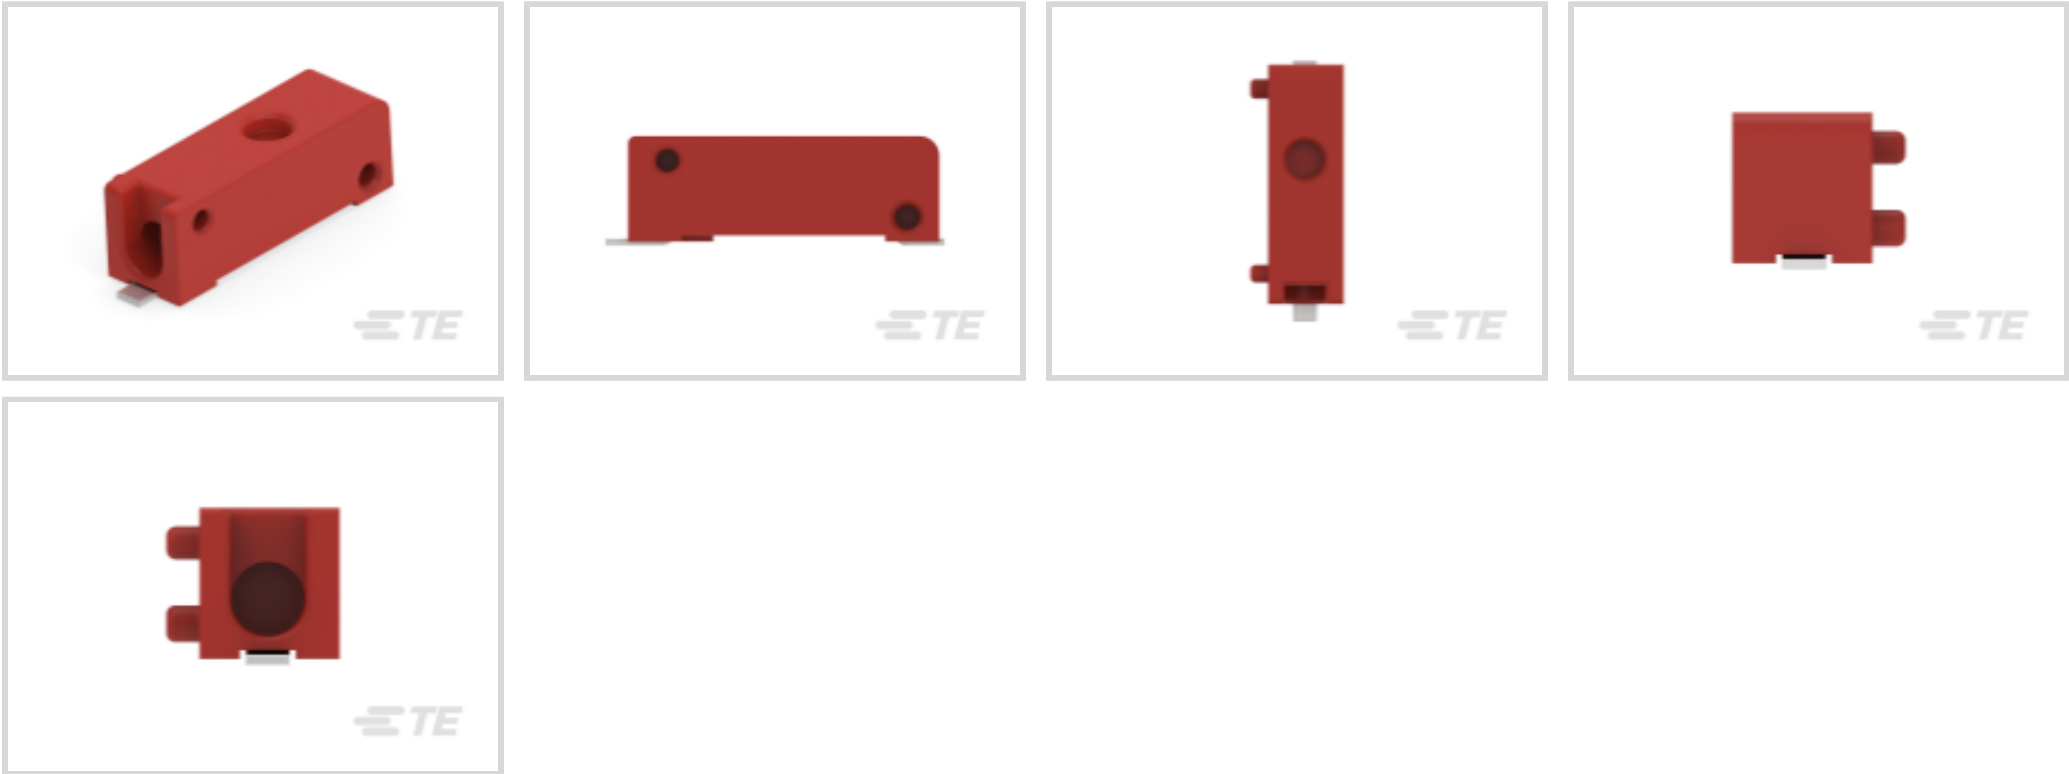

Connector System: **Wire-to-Board**  
Number of Positions: **1**  
Centerline (Pitch): **4 mm**  
Connector & Contact Terminates To: **Printed Circuit Board**  
Connector Height: **4.48 mm [.176 in]**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| Product Line                      | Poke-In               |
| Connector System                  | Wire-to-Board         |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                     |   |
|---------------------|---|
| Number of Positions | 1 |
|---------------------|---|

Electrical Characteristics

|                   |         |
|-------------------|---------|
| Operating Voltage | 400 VAC |
|-------------------|---------|

Body Features

|                       |         |
|-----------------------|---------|
| Primary Product Color | Natural |
|-----------------------|---------|

Contact Features

|                                                      |          |
|------------------------------------------------------|----------|
| Contact Underplating Material                        | Nickel   |
| PCB Contact Termination Area Plating Material        | Tin-Lead |
| PCB Contact Termination Area Plating Material Finish | Matte    |



|                              |     |
|------------------------------|-----|
| Contact Current Rating (Max) | 6 A |
|------------------------------|-----|

Termination Features

|                           |               |
|---------------------------|---------------|
| Termination Method to PCB | Surface Mount |
|---------------------------|---------------|

Mechanical Attachment

|                         |             |
|-------------------------|-------------|
| Connector Mounting Type | Board Mount |
|-------------------------|-------------|

Housing Features

|                    |      |
|--------------------|------|
| Centerline (Pitch) | 4 mm |
|--------------------|------|

Dimensions

|                                      |                   |
|--------------------------------------|-------------------|
| Compatible Insulation Diameter Range | 2.1 mm            |
| Connector Height                     | 4.48 mm [.176 in] |
| Wire Size                            | 18 – 22 AWG       |

Industry Standards

|                                             |                    |
|---------------------------------------------|--------------------|
| Compatible With Agency/Standards Products   | UL                 |
| UL Flammability Rating                      | UL 94V-0           |
| Compatible With Approved Standards Products | UL 1977, UL E28476 |

Packaging Features

|                  |             |
|------------------|-------------|
| Packaging Method | Tape & Reel |
|------------------|-------------|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Reflow solder capable to 245°C                                                                                                |

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2324697-3  
PUSH GRIP CONNECTOR 3P

TE Part # 2834006-1  
RELEASE POKE-IN CONNECTOR\_1POLES

Customers Also Bought

TE Part #2213616-2  
HERM BLADE & RECPT,4 POS,POST, SEL GOLD

TE Part #3-2176325-3  
CRGP 0402 4K7 1%

TE Part #2213616-1  
HERM BLADE & RECPT,2 POS,POST, SEL GOLD

TE Part #1-2176051-7  
RLP73N 1J R24 1% 1K RL

TE Part #2-2176513-5  
CJP 1000W 220R 5% Lead

TE Part #2213614-2  
HERM BLADE & REC,4 POS,LATCH, SELECT GOLD

TE Part #1546074-5  
5 POS 5.08MM TERMI-BLOK TOP WI

TE Part #1971567-3  
MINIATURE HERMAPHRODITIC (6P)



Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_3-2834006-1\\_B.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-2834006-1\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_3-2834006-1\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Modular Releasable Poke-in datasheet

English

BUCHANAN WireMate Connectors Brochure

BUCHANAN WireMate Connectors Brochure

English

Modular Releasable Poke-in datasheet (Chinese)

Product Specifications

Application Specification

English

Agency Approvals

UL

English