




Connectors > Connector Accessories > Connector Caps & Covers

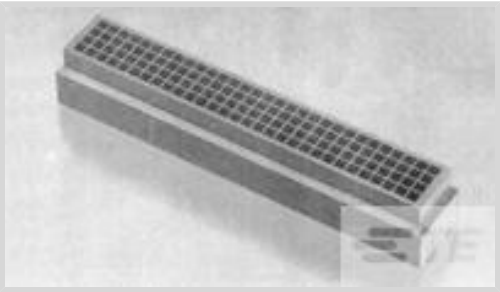

Connector Cover Type: **PCB Mount Shroud**
Primary Product Color: **Black**
Primary Product Material: **PBT**
Number of Positions: **120**
Operating Temperature (Max): **105 °C [221 °F]**

Features

Product Type Features

Connector Cover Type	PCB Mount Shroud
----------------------	------------------

Configuration Features

Number of Rows	4
Number of Positions	120

Body Features

Primary Product Color	Black
Primary Product Material	PBT

Mechanical Attachment

Mating Alignment	Without
------------------	---------

Housing Features

Centerline (Pitch)	2 mm[.079 in]
--------------------	---------------

Dimensions

Row-to-Row Spacing	2 mm[.079 in]
Product Width	11.18 mm[.44 in]
Product Length	64.36 mm[2.533 in]
Product Height	11.43 mm[.45 in]

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]



Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Carton
------------------	--------

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1375800-1
[ASSY, 120 POS PC104 PLUS](#)



Customers Also Bought

TE Part #1375795-5
PC104 ASY STKTHRU UNKEYED

TE Part #5787430-1
HDR ASY,VERT,STR TAIL,12.0V

TE Part #1375799-3
ASSY, 120 POS PC104 PLUS

TE Part #1375795-2
PC104 ASY STKTHRU UNKEYED

TE Part #1473005-1
SEMI HARD TRAY DDR SOCKET 200P

TE Part #2-111196-2
60 RCPT SYSTEM 50, LEAD FREE

TE Part #5-146128-4
06 MODII HDR SR SFMNT B/A .100

TE Part #364921-E
STVR/2 48 MI ABC VVV 4-00 GA06 4,0 * 247

TE Part #171826-4
POST HEADER ASSY HORIZONTAL EI

TE Part #5-104068-6
60 SYSTEM 50 HDR DRST SHRD

Documents

Product Drawings
SHROUD, 120 POS PC104 PLUS
English

CAD Files
3D PDF
English
Customer View Model
ENG_CVM_1375801-1_O.2d_dxf.zip
English
Customer View Model
ENG_CVM_1375801-1_O.3d_igs.zip
English
Customer View Model
ENG_CVM_1375801-1_O.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Datasheets & Catalog Pages

AMPMODU_INTERCONNECTION_SYSTEM_SECTION1AND2

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English