


Eaton 266814

Catalog Number: 266814

Eaton Moeller series NZM - Molded Case Circuit Breaker. Module plate 1-hole 3p, size 4

General specifications

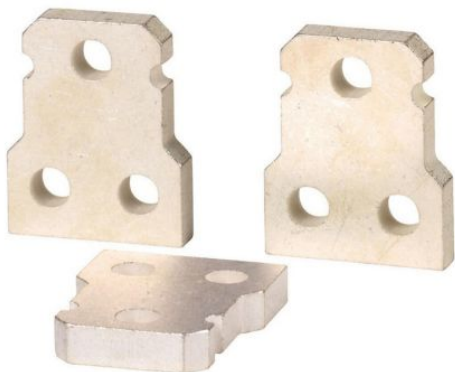

Product Name	Catalog Number
Eaton Moeller series NZM - Molded case circuit breaker	266814

EAN
4015082668143

Product Length/Depth
61 mm

Product Height
10 mm

Product Width
135 mm

Product Weight
0.621 kg

Compliances
IEC
UL/CSA
RoHS conform

Certifications
IEC60947
CSA (File No. 22086)
UL (Category Control Number DIHS)
CE marking
CSA certified
UL489
CSA (Class No. 1432-01)
CSA-C22.2 No. 5-09
UL (File No. E31593)
UL listed

Product specifications

Used with

NZM4, N(S)4

Type

Accessory Module plate Terminal

Special features

One hole

Amperage Rating

1250 A

10.10 Temperature rise

The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

10.11 Short-circuit rating

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.13 Mechanical function

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

10.2.2 Corrosion resistance

Meets the product standard's requirements.

10.2.3.1 Verification of thermal stability of enclosures

Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heat

Meets the product standard's requirements.

10.2.3.3 Resist. of insul. mat. to abnormal heat/fire by internal elect. effects

Meets the product standard's requirements.

10.2.4 Resistance to ultra-violet (UV) radiation

Meets the product standard's requirements.

10.2.5 Lifting

Does not apply, since the entire switchgear needs to be evaluated.

10.2.6 Mechanical impact

Resources

Brochures

[eaton-digital-nzm-brochure-br013003en-en-us.pdf](#)

[eaton-feerum-the-whole-grain-solution-success-story-en-us.pdf](#)

Catalogs

[eaton-digital-nzm-catalog-ca013003en-en-us.pdf](#)

Declarations of conformity

[DA-DC-03_NZM4](#)

Drawings

[eaton-circuit-breaker-plate-nzm-module-plate-dimensions-002.eps](#)

[eaton-circuit-breaker-plate-nzm-module-plate-3d-drawing-002.eps](#)

[eaton-circuit-breaker-plate-nzm-module-plate-3d-drawing-003.eps](#)

Installation instructions

[eaton-circuit-breakers-nzm4-xkm1-2-2s-module-plate-1-2-hole-instruction-leaflet-il01210011z.pdf](#)

Installation videos

[Introduction of the new digital circuit breaker NZM](#)

[The new digital NZM Range](#)

mCAD model

[DA-CD-nzm4_xkm1](#)

[DA-CS-nzm4_xkm1](#)

Technical data sheets

[eaton-nzm-technical-information-sheet](#)

Does not apply, since the entire switchgear needs to be evaluated.

10.2.7 Inscriptions

Meets the product standard's requirements.

10.3 Degree of protection of assemblies

Does not apply, since the entire switchgear needs to be evaluated.

10.4 Clearances and creepage distances

Meets the product standard's requirements.

10.5 Protection against electric shock

Does not apply, since the entire switchgear needs to be evaluated.

10.6 Incorporation of switching devices and components

Does not apply, since the entire switchgear needs to be evaluated.

10.7 Internal electrical circuits and connections

Is the panel builder's responsibility.

10.8 Connections for external conductors

Is the panel builder's responsibility.

10.9.2 Power-frequency electric strength

Is the panel builder's responsibility.

10.9.3 Impulse withstand voltage

Is the panel builder's responsibility.

10.9.4 Testing of enclosures made of insulating material

Is the panel builder's responsibility.

Frame

NZM4

Suitable for

Three-pole

Copper cable lugs

Number of poles

Three-pole

Terminal capacity (copper strip)

10 segments of 40 mm x 1 mm (2x)

10 segments of 50 mm x 1 mm (2x)

Terminal capacity (flexible cable)

95 mm² - 300 mm² (2x)

250 - 600 AWG/kcmil (1x)

120 mm² - 300 mm² (1x)

Max. 600 AWG/kcmil (2x)

Terminal capacity (copper busbar)

50 mm x 10 mm (2x)

40 mm x 10 mm (2x)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia