

CANALIS Connection 1600A MTZ2/ NW 4P Prisma P

LVS04716

EAN Code: 3606481868183

Main

Range	PrismaSeT	
Range of product	PrismaSeT P	
Product or component type	Interface and connection Canalis	
product name	PrismaSeT PrismaSeT P enclosure	
Accessory / separate part category	Interface accessory	
Standards	IEC 61439-2 IEC 61439-1	
Product certifications	ASTA	

Complementary

Cubicle-device connection	KT with Canalis	
Poles description	4P	
installation description	Cubicle - width 650 mm	
Cubicle depth	600 mm: front 600 + 400 mm: rear	
Installed device	Masterpact: drawout NW0816 - control: toggle vertical installation Masterpact: fixed NW0816 - control: toggle vertical installation	
[le] rated operational current	1600 A	
Colour	Natural	
Height	350 mm	
Width	575 mm	
Depth	420 mm	
Net weight	49.9 kg	
Quantity per set	Set of 1	
functional unit	650 mm 600 mm PrismaSeT P cubicle Masterpact NW0816 drawout toggle vertical 4P 1 front connection on Canalis 27 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW0816 drawout toggle vertical 4P 1 rear connection on Canalis 17 650 mm 600 mm PrismaSeT P cubicle Masterpact NW0816 fixed toggle vertical 4P 1 front connection on Canalis 27 650 mm 1000 mm PrismaSeT P cubicle Masterpact NW0816 fixed toggle vertical	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

4P 1 rear connection on Canalis 16

Package 1 Height	43.000 cm	
Package 1 Width	40.000 cm	
Package 1 Length	62.000 cm	
Package 1 Weight	45.500 ka	

Logistical informations

Country of origin

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

∅ Environmental footprint

Environmental Disclosure

Product Environmental Profile

Use Better


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant
REACh Regulation	REACh Declaration

Use Again

○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

Technical Illustration

Dimensions

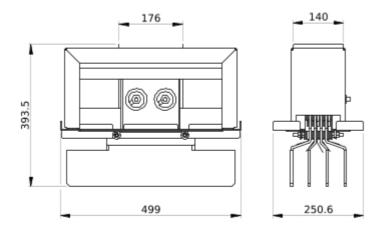

- All dimensions are approximate and are in
 Also see technical documentation.