


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

PART No.	CODE No.	NUMBER OF CONTACTS	A	B	C
DF13- 2P-1.25DSA(20)	CL536-0101-9-20	2	1.25	3.15	4.15
DF13- 3P-1.25DSA(20)	CL536-0102-1-20	3	2.5	4.4	5.4
DF13- 4P-1.25DSA(20)	CL536-0103-4-20	4	3.75	5.65	6.65
DF13- 5P-1.25DSA(20)	CL536-0104-7-20	5	5	6.9	7.9
DF13- 6P-1.25DSA(20)	CL536-0105-0-20	6	6.25	8.15	9.15
DF13- 7P-1.25DSA(20)	CL536-0106-2-20	7	7.5	9.4	10.4
DF13- 8P-1.25DSA(20)	CL536-0107-5-20	8	8.75	10.65	11.65
DF13- 9P-1.25DSA(20)	CL536-0108-8-20	9	10	11.9	12.9
DF13-10P-1.25DSA(20)	CL536-0109-0-20	10	11.25	13.15	14.15
DF13-11P-1.25DSA(20)	CL536-0110-0-20	11	12.5	14.4	15.4
DF13-12P-1.25DSA(20)	CL536-0111-2-20	12	13.75	15.65	16.65
DF13-13P-1.25DSA(20)	CL536-0112-5-20	13	15	16.9	17.9
DF13-14P-1.25DSA(20)	CL536-0113-8-20	14	16.25	18.15	19.15
DF13-15P-1.25DSA(20)	CL536-0114-0-20	15	17.5	19.4	20.4

2>APPLICATION FIGURE

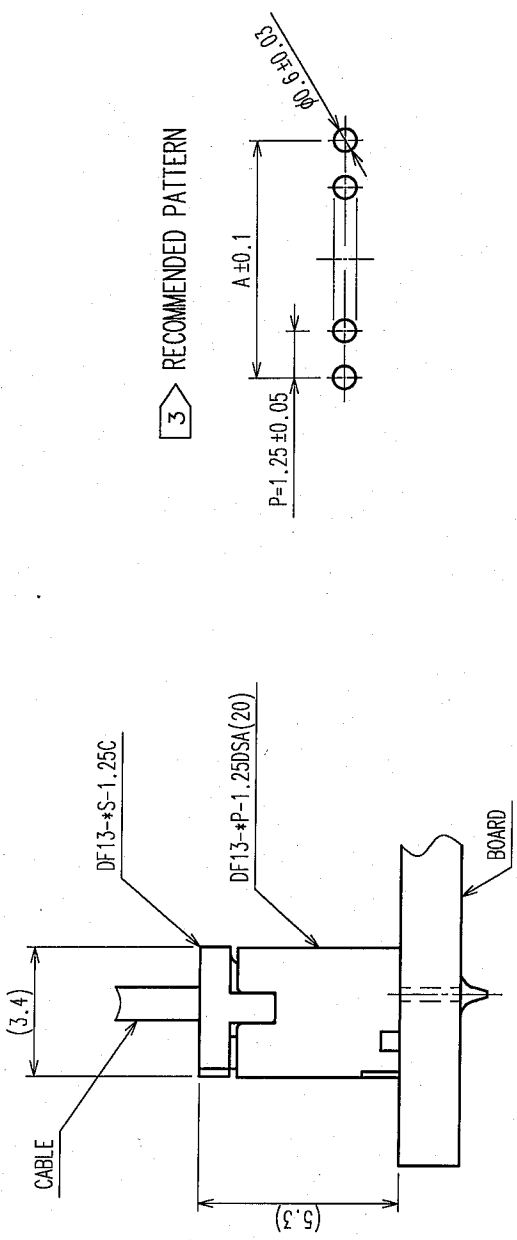


2	BRASS	SURFACE: TIN PLATED 1μm min.	4	STYRENIC-BASED ELASTOMERS	STOPPER, GREEN
1	POLYAMIDE	BEIGE(NATURAL), UL94V-0	3	PS	ELECTROSTATIC PROTECTION, CLEAR
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)					
DRAWN					
DESIGNED					
CHECKED					
APPROVED					
RELEASED					
T. Kumagawa T. Kumagawa H. Tanaka J. Ono					
05.11.16 05.11.16 05.11.16 05.11.16					
PART NO. DF13--P-1.25DSA(20)					
DRAWING NO. EDC3-083673-05					
SCALE 5 : 1					
UNITS mm					
HIROSE ELECTRIC CO., LTD					
CL536--					
1/2					

- 1> WHEN THIS CONNECTOR HAS TWO OR THREE CONTACTS, THE LOCK OF CONNECTOR SHALL BE SET AT THE CENTER OF HOUSING. IN CASE THAT THE NUMBER OF CONTACTS IS MORE THAN FOUR, THE TWO LOCKS SHALL BE SET IN ACCORDANCE WITH THE DRAWINGS.
- 2> WHEN THIS CONNECTOR MATES WITH DF13-S-1.25C, THE MATING LENGTH IS 5.3mm.
- 3> RECOMMENDED DIP POST DIA. : φ 0.6±0.03


TO

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

510 0
3

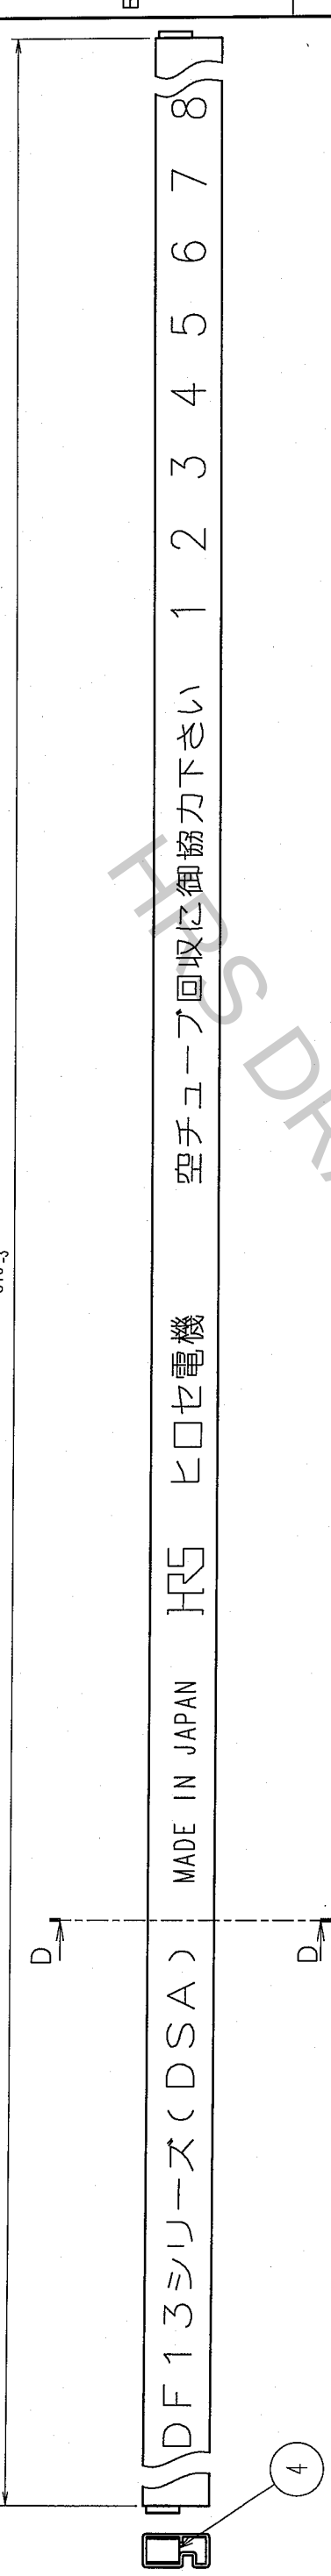

PART No.	CODE No.	NUMBER OF CONTACTS	QUANTITY OF CONNECTORS
DF13- 2P-1.25DSA(20)	CL536-0101-9-20	2	115
DF13- 3P-1.25DSA(20)	CL536-0102-1-20	3	89
DF13- 4P-1.25DSA(20)	CL536-0103-4-20	4	72
DF13- 5P-1.25DSA(20)	CL536-0104-7-20	5	61
DF13- 6P-1.25DSA(20)	CL536-0105-0-20	6	52
DF13- 7P-1.25DSA(20)	CL536-0106-2-20	7	46
DF13- 8P-1.25DSA(20)	CL536-0107-5-20	8	41
DF13- 9P-1.25DSA(20)	CL536-0108-8-20	9	37
DF13-10P-1.25DSA(20)	CL536-0109-0-20	10	34
DF13-11P-1.25DSA(20)	CL536-0110-0-20	11	31
DF13-12P-1.25DSA(20)	CL536-0111-2-20	12	29
DF13-13P-1.25DSA(20)	CL536-0112-5-20	13	27
DF13-14P-1.25DSA(20)	CL536-0113-8-20	14	25
DF13-15P-1.25DSA(20)	CL536-0114-0-20	15	23

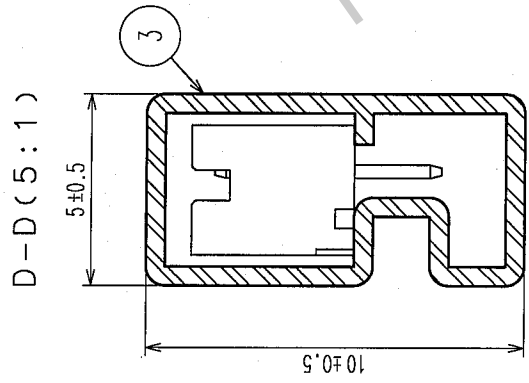

NOTE4. MINIMUM UNIT OF PURCHASE SHALL BE THE QUANTITY OF CONNECTORS IN TUBE.

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS			
CODE NO. (OLD)			DRAWN		DESIGNED	CHECKED	APPROVED	RELEASED
			T. Kumagawa		T. Kumagawa	H. Umemura	J. Oka	
			'05.11.16		'05.11.16	'05.11.16	'05.11.16	
DRAWING NO.		PART NO.						
SCALE		EDC3-083673-05		DF13-*P-1.25DSA(20)				
FREE								
UNITS		mm						
HRS		HIROSE ELECTRIC CO., LTD		CODE NO.		CL536-		
				2				