


## FEATURES

- **Annealed Copper Conductor:** Provides superior electrical conductivity and durability
- **Polyvinyl Chloride Jacket:** Offers protection against environmental factors and mechanical stress
- **50 m Length:** Suitable for extended installations without the need for additional connections
- **Operating Temperature Range -15 °C to 70 °C:** Ensures performance in a wide range of environmental conditions
- **500 V Voltage Rating:** Suitable for high-voltage applications
- **Plain Conductor Type:** Simplifies installation and maintenance
- **2 Core Strands (30/0.25):** Enhances flexibility and ease of handling

## RS PRO 1.5 mm<sup>2</sup> Flexible Cable, 50 m

RS Stock No: 606-128

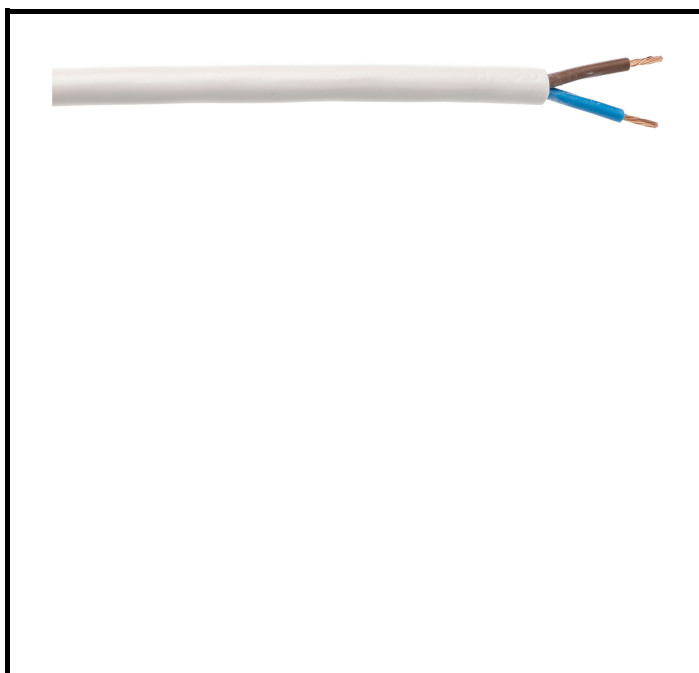

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

This RS PRO flexible cable is designed for reliable electrical connections in various industrial and commercial settings. With a conductor made from annealed copper, it ensures excellent conductivity and durability. The cable is suitable for installations requiring flexibility and resilience, making it ideal for dynamic environments.

## General Specifications

Conductor Material	Annealed Copper
Conductor Type	Plain
Jacket Colour	White
Product Type	Flexible Cable

## Mechanical Specifications

Cable CSA	1.5 mm <sup>2</sup>
Cable Length	50 m
Core Strands	30/0.25
Jacket Material	Polyvinyl Chloride
Number of Cores	2
Outside Diameter	8.6 mm

## Operation Environment Specifications

Maximum Operating Temperature	70 °C
Minimum Operating Temperature	-15 °C

## Approvals

Standards/Approvals	ACI, BASEC ISO 9001 UKAS CS1-029, BS EN 50363-3, BS EN 50363-4-1, BS EN 50525-2-11, BS EN 60228
---------------------	---

## Electrical Specifications

Voltage	500 V
---------	-------