


Data sheet


chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

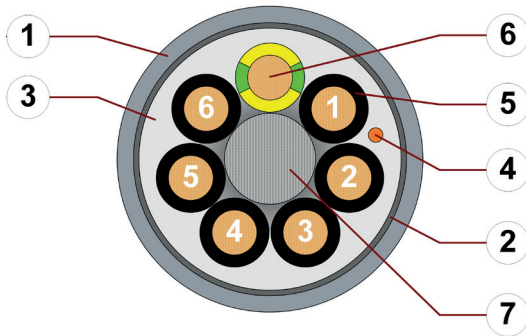

1. Outer jacket: Pressure extruded PUR mixture
2. Overall shield: Bending-resistant braiding made of tinned copper wires
3. Inner jacket: Pressure extruded, gusset-filling TPE mixture
4. CFRIP: Tear strip for faster cable stripping
5. Core insulation: Mechanically high-quality TPE mixture
6. Conductor: Fine-wire strand consisting of bare copper wires
7. Strain relief: Tensile stress-resistant centre element
8. 12 cores or more: Bundles with optimised pitch length and pitch direction

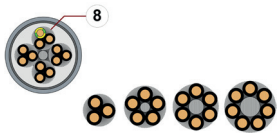

Example image
For detailed overview please see design table

Cable structure

- Conductor** Finely stranded conductor consisting of bare copper wires (following DIN EN 60228).
- Core insulation** Mechanically high-quality TPE mixture.
- Core structure** **Number of cores < 12:** Cores wound in a layer with short pitch length. **Number of cores ≥ 12:** Cores wound in bundles which are then wound around a high tensile strength centre element, all with optimised short pitch lengths and directions. Especially low-torsion structure.
- Core identification** Black cores with white numbers, one green-yellow core.
- Inner jacket** TPE mixture adapted to suit the requirements in e-chains®.
- Overall shield** Bending-resistant braiding made of tinned copper wires. Coverage approx. 55 % linear, approx. 80 % optical
- Outer jacket** Low-adhesion, halogen-free, highly abrasion resistant PUR mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-10-2). Colour: Window-grey (similar to RAL 7040) Printing: black
- CFRIP®** Strip cables faster: a tear strip is moulded into the inner jacket Video ► www.igus.eu/CFRIP

„00000 m*** igus chainflex CF78.UL-.-.① --② -/V③ E310776

cRUus AWM Style 21223 VW-1 AWM I/II A/B 80°C ---V⑤ FT-1 GL 61 935-14 HH

EAC/CTP CE RoHS-II conform www.igus.de +++ chainflex cable works +++

* **Length printing:** Not calibrated. Only intended as an orientation aid.
 ① / ② Cable identification according to Part No. (see technical table).
 ③ Printing of nominal voltage (see general electrical values).
 ④ / ⑤ Printing of the UL Style / Voltage (see certifications for details).
 Example: ... chainflex ... CF78.UL.05.04 ... (4G0.5)C ... 300 V/500 V ...








Data sheet

chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Dynamic information

	Bend radius	e-chain® linear flexible fixed	minimum 6.8 x d minimum 5 x d minimum 4 x d
	Temperature	e-chain® linear flexible fixed	-25 °C up to +80 °C -40 °C up to +80 °C (following DIN EN 60811-504) -50 °C up to +80 °C (following DIN EN 50305)
	v max.	unsupported gliding	10 m/s 5 m/s
	a max.		80 m/s ²
	Travel distance		Unsupported travels and up to 100 m for gliding applications, Class 5



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

Guaranteed service life according to guarantee conditions

Double strokes	5 million		7.5 million		10 million	
	< 10 m	≥ 10 m	< 10 m	≥ 10 m	< 10 m	≥ 10 m
	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]	R min. [factor x d]
-25/-15	8.5	10	9.5	11	10.5	12
-15/+70	6.8	7.5	7.5	8.5	8.5	9.5
+70/+80	8.5	10	9.5	11	10.5	12

Minimum guaranteed service life of the cable under the specified conditions.
The installation of the cable is recommended within the middle temperature range.

Electrical information

	Nominal voltage	300/500 V (following DIN VDE 0298-3)
	Testing voltage	2000 V (following DIN EN 50395)



Example image
igus® chainflex® CF78.UL



Data sheet
















chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Properties and approvals



	UV resistance	Medium
	Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
	Offshore	MUD-resistant following NEK 606 - status 2009
	Flame retardant	According to IEC 60332-1-2, CEI 20-35, FT1, VW-1
	Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
	Halogen-free	Following DIN EN 60754
	UL/CSA	Style 11323 and 21223, 1000 V, 80 °C
	NFFPA	Following NFFPA 79-2012, chapter 12.9
	DNV-GL	Type approval certificate No. 61 935-14 HH
	EAC	Certificate No. RU C-DE.ME77.B.01254 (TR ZU)
	CTP	Certificate No. C-DE.PB49.B.00416 (Fire protection)
	CEI	Following CEI 20-35
	Lead-free	Following 2011/65/EC (RoHS-II)
	Clean room	According to ISO Class 1. The outer jacket material of this series complies with CF77. UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
	CE	Following 2014/35/EU



Data sheet

chainflex® CF78.UL




Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



Typical lab test setup for this cable series

Test bend radius R	approx. 48 - 200 mm
Test travel S	approx. 1 - 15 m
Test duration	minimum 2 - 4 million double strokes
Test speed	approx. 0.5 - 2 m / s
Test acceleration	approx. 0.5 - 1.5 m / s ²

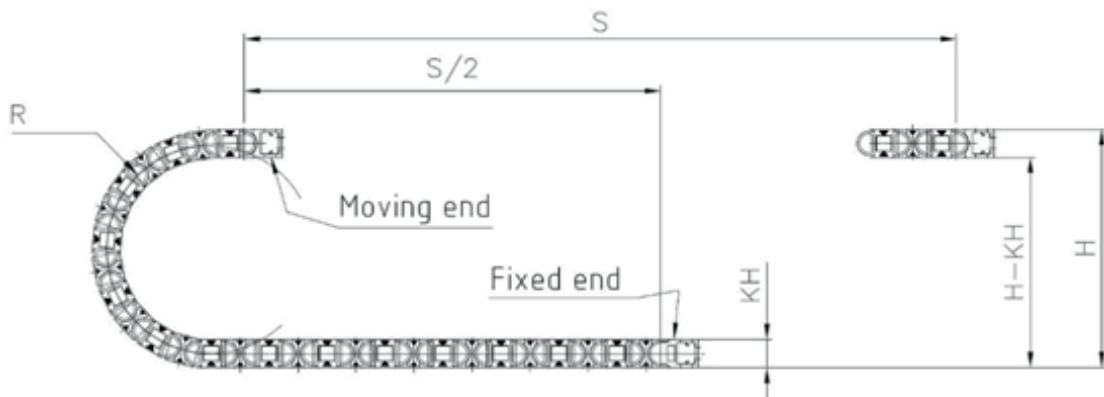

Typical application areas

- For heavy duty applications, Class 5
- Unsupported travel distances and up to 100 m for gliding applications, Class 5
- Almost unlimited resistance to oil, Class 3
- No torsion, Class 1
- Indoor and outdoor applications with average sun radiation
- Machining units/machine tools, Storage and retrieval units for high-bay warehouses, Packaging industry, quick handling, refrigerating sector



Example image

igus® chainflex® CF78.UL

Data sheet

chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Technical tables:

Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF78.UL.05.04	(4G0.5)C	8.0	38	77
CF78.UL.05.05	(5G0.5)C	8.0	45	91
CF78.UL.05.07	(7G0.5)C	9.5	58	119
CF78.UL.05.09	(9G0.5)C	11.0	77	143
CF78.UL.05.12	(12G0.5)C	12.5	92	202
CF78.UL.05.18	(18G0.5)C	14.5	146	247
CF78.UL.05.25	(25G0.5)C	16.0	168	354
CF78.UL.07.03	(3G0.75)C	8.0	42	77
CF78.UL.07.04	(4G0.75)C	8.5	49	96
CF78.UL.07.05	(5G0.75)C	9.5	61	105
CF78.UL.07.07	(7G0.75)C	10.5	82	142
CF78.UL.07.12	(12G0.75)C	13.5	136	242
CF78.UL.07.18	(18G0.75)C	15.5	193	354
CF78.UL.07.36	(36G0.75)C	22.0	390	702
CF78.UL.07.42 ¹¹⁾	(42G0.75)C	24.5	458	769
CF78.UL.10.03	(3G1.0)C	8.5	50	87
CF78.UL.10.04	(4G1.0)C	9.0	62	104
CF78.UL.10.05	(5G1.0)C	9.5	74	119
CF78.UL.10.07	(7G1.0)C	11.0	104	164
CF78.UL.10.12	(12G1.0)C	14.5	166	295
CF78.UL.10.18	(18G1.0)C	17.0	240	407
CF78.UL.10.25	(25G1.0)C	20.0	325	545
CF78.UL.15.03	(3G1.5)C	9.5	68	129
CF78.UL.15.04	(4G1.5)C	10.0	85	134
CF78.UL.15.05	(5G1.5)C	10.5	109	160
CF78.UL.15.07 ¹⁷⁾	(7G1.5)C	12.5	144	217
CF78.UL.15.12	(12G1.5)C	16.0	233	387
CF78.UL.15.18	(18G1.5)C	19.0	345	541
CF78.UL.15.25	(25G1.5)C	22.5	463	724
CF78.UL.15.36	(36G1.5)C	26.5	663	1095
CF78.UL.15.42	(42G1.5)C	29.5	820	1296

¹⁷⁾ When using the cables with "7 G 1.5 mm²" and "7 G 2.5 mm²" minimum bend radius must be 17.5 x d with gliding travel distance ≥ 5 m.

¹¹⁾ Phase-out model

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.

G = with green-yellow earth core x = without earth core



Example image



Data sheet

chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



Part No.	Number of cores and conductor nominal cross section [mm ²]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CF78.UL.25.03	(3G2.5)C	10.0	106	181
CF78.UL.25.04	(4G2.5)C	11.5	139	203
CF78.UL.25.05	(5G2.5)C	12.5	166	235
CF78.UL.25.07 ¹⁷⁾	(7G2.5)C	14.5	229	334
CF78.UL.25.12	(12G2.5)C	19.0	382	585
CF78.UL.40.04	(4G4.0)C	14.0	203	328

¹⁷⁾ When using the cables with “7 G 1.5 mm²” and “7 G 2.5 mm²” minimum bend radius must be 17.5 x d with gliding travel distance ≥ 5 m.

Note: The given outer diameters are maximum values and may tend toward lower tolerance limits.
G = with green-yellow earth core **x** = without earth core



Example image

Data sheet

chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



Example image

Electrical information

Conductor nominal cross section [mm ²]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C (following DIN VDE 0298-4) [A]
0.5	39.0	10
0.75	26.0	14
1	19.5	17
1.5	13.3	21
2.5	8.0	30
4	4.95	41

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Data sheet

chainflex® CF78.UL



Control cable (Class 5.5.3.1) ● For heavy duty applications ● PUR outer jacket ● Shielded ● Oil resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

Design table

Part No.	Number of cores	Core design	Part No.	Number of cores	Core design
CF78.UL.XX.03	3		CF78.UL.XX.12	4x3	
CF78.UL.XX.04	4		CF78.UL.XX.18	6x3	
CF78.UL.XX.05	5		CF78.UL.XX.25	5x5	
CF78.UL.XX.07	7		CF78.UL.XX.36	6x6	
CF78.UL.XX.09	9		CF78.UL.XX.42	7x6	



Example image

