Product datasheet





Regulated Power Supply, 100-240V AC, 24V 3.8 A, single phase, Optimized

ABLS1A24038

EAN Code: 3606481500212

Main

Range Of Product	Modicon Power Supply	
Product Or Component Type	Power supply	
Power Supply Type	Regulated switch mode	
Variant Option	Optimized	
Enclosure Material	Plastic	
Nominal Input Voltage	100240 V AC single phase 100240 V AC phase to phase	
Rated Power In W	91.2 W	
Output Voltage	24 V DC	
Power Supply Output Current	3.8 A	

Complementary

Complementary	
Input Voltage Limits	85264 V AC
Nominal Network Frequency	5060 Hz
Network System Compatibility	TN
	ΤΤ ΙΤ
Maximum Leakage Current	1 mA 240 V AC
Input Protection Type	Integrated fuse (not interchangeable) 3.15 A
	External protection (recommended) 20 A Curve C
	External protection (recommended) 10 A Curve B
	External protection (recommended) 6 A Curve C
Inrush Current	45.0 A at 115 V
	70.0 A at 230 V
Power Factor	0.90 at 115 V AC
	0.85 at 230 V AC
Efficiency	87 % at 115 V AC
	89 % at 230 V AC
Output Voltage Adjustment	24 V
Power Dissipation In W	13 W
Current Consumption	< 1.2 A 115 V AC
	< 0.6 A 230 V AC
Turn-On Time	< 3 s
Holding Time	> 20 ms 100 V AC
	> 50 ms 230 V AC
Startup With Capacitive Loads	3000 μF
Residual Ripple	< 75 mV

Life Is On Schneider 27 Dec 2023

Meantime Between Failure [Mtbf]	1500000 h at 25 °C, full load conforming to SR 332 600000 h at 55 °C, 80 % load conforming to SR 332		
Output Protection Type	Against overload and short-circuits, protection technology: automatic reset Against over temperature, protection technology: manual reset Against overvoltage, protection technology: manual reset		
Connections - Terminals	Screw connection: 0.52.5 mm², (AWG 20AWG 14) for input/output		
Line And Load Regulation	< 1 % at 0 to 100 % load at 25 °C < 2 % at full voltage range in line at 25 °C		
Status Led	1 LED (green) output voltage		
Depth	100 mm		
Height	75 mm		
Width	45 mm		
Net Weight	0.325 kg		
Output Coupling	Serial		
Mounting Support	Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 rail conforming to IEC 60715 Double-profile DIN rail		
Supply	SELV conforming to IEC 60950-1 SELV conforming to IEC 60204-1 SELV conforming to IEC 60364-4-41		
Dielectric Strength	3000 V AC with input to output		
Service Life	10 year(s)		
Overvoltage Category	II .		

Environment

Standards	IEC 62368-1 EN/IEC 61204-3 IEC 61000-6-1 IEC 61000-6-2 IEC 61000-6-3 IEC 61000-6-4 IEC 61000-3-2 EN 61000-3-3 UL 62368-1 CSA C22.2 No 62368-1 UL 508 CSA C22.2 No 107.1 EN/IEC 62368-1	
Product Certifications	CE CUL listed CUL recognized RCM CB Scheme EAC KC NEC: class 2	
Operating Altitude	< 2000 m	
Shock Resistance	150 m/s² for 11 ms	
Ip Degree Of Protection	IP20	
Ambient Air Temperature For Operation	-2010 °C with current derating of 2 % per °C mounting position A < 2000 m -1055 °C without derating mounting position A < 2000 m 5570 °C with current derating of 3.33 % per °C mounting position A < 2000 m	
Electrical Shock Protection Class	Class I	
Pollution Degree	2	
Vibration Resistance	3 mm (f= 29 Hz) conforming to IEC 60068-2-6 10 m/s² (f= 9200 Hz) conforming to IEC 60068-2-6	

Electromagnetic Immunity

Immunity to electrostatic discharge - test level: 8 kV (contact discharge) conforming to IEC 61000-4-2

Immunity to electrostatic discharge - test level: 15 kV (air discharge) conforming to IEC 61000-4-2

Immunity to conducted RF disturbances - test level: 15 V/m (80 MHz...2 GHz) conforming to IEC 61000-4-3

Immunity to conducted RF disturbances - test level: 5 V/m (2...2.7 GHz) conforming to IEC 61000-4-3 $\,$

Immunity to conducted RF disturbances - test level: 5 V/m (2.7...6 GHz) conforming to IEC 61000-4-3

Immunity to fast transients - test level: 4 kV (on input-output) conforming to IEC 61000-4-4 $\,$

Surge immunity test - test level: 4 kV (between power supply and earth) conforming to IEC 61000-4-5

Surge immunity test - test level: 3 kV (between phases) conforming to IEC 61000-4-5 Immunity to conducted RF disturbances - test level: 15 V (0.15...80 MHz) conforming to IEC 61000-4-6

Immunity to magnetic fields - test level: 30 A/m (50...60 Hz) conforming to IEC 61000-4-8 $\,$

Immunity to voltage dips conforming to IEC 61000-4-11

Disturbing field emission conforming to EN 55016-2-3

Limits for harmonic current emissions conforming to IEC 61000-3-2

conforming to EN 55016-1-2 conforming to EN 55016-2-1

Electromagnetic Emission

Conducted emissions conforming to IEC 61000-6-3 Radiated emissions conforming to IEC 61000-6-4

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	5.25 cm
Package 1 Width	8.6 cm
Package 1 Length	11.9 cm
Package 1 Weight	374.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	21
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	8.197 kg

Contractual warranty

Warranty 18 months

Sustainability Screen Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards

Reach Regulation	Pro-active compliance (Product out of EU RoHS legal scope)		
Eu Rohs Directive			
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins		
Circularity Profile	End of Life Information		

Product datasheet

ABLS1A24038


Dimensions Drawings

Electrical Safety

- If the unit is use in a manner not specified by the manufacturer, the protection provided by the equipment may be impaired.
- For means of disconnection a switch or circuit breaker, located near the product, must be included in the installation. A marking as disconnecting device for the product is required.
- The device has an internal fuse. The unit is tested and approved with branch circuit protective device up to 20A. This circuit breaker can be used as disconnecting device.
- The power supply is only suitable for audio, video, information, communication, industrial and control equipment.


Dimensions

Front and Side Views

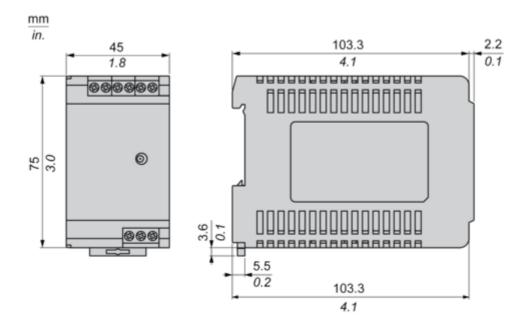


Connections and Schema

Correct Parallel Connection

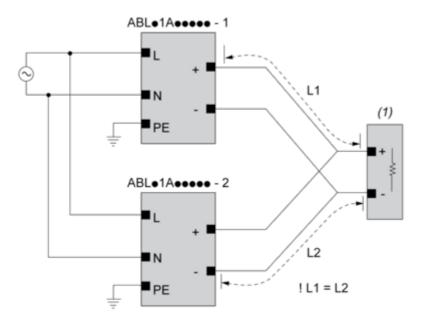


(1): Load

Incorrect Parallel Connection

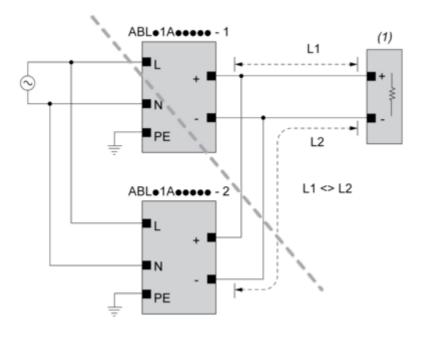

(1): Load ABLx1Axxxxx-1 = ABLx1Axxxxx-2 max 2 x ABLx1Axxxxx L1 = L2 Δ V max 25 mV I_{Load} < 90% 2 x I_{nom}

Output Voltage Balancing

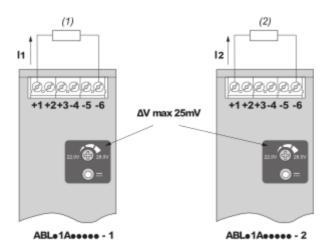


- (1): R_{Load1}
- (2): R_{Load2}

 $R_{Load1} = R_{Load2}$

 $I_1 = I_2 = \sim I_{\text{nom}}$

Series Connection

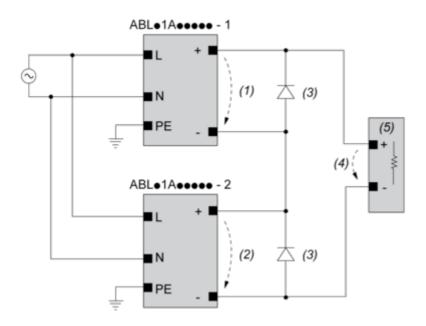

- (1): V_{out1}
- (2) : V_{out2}
- (3) : 2 x Diode, V_{RRM}> 2 x V_{out1/2}, I_F > 2 x I_{nom1/2}
- (4) : V_{Load} = 2 x V_{out}
- (5) : Load

Connections and Schema

	(1)		
	<40°C	<50°C	<70°C
ABLS1A24021	50°C	60°C	75°C
ABLS1A24038	50°C	60°C	75°C
ABLS1A12062	50°C	60°C	80°C
ABLS1A24031	50°C	60°C	80°C
ABLS1A12100	60°C	70°C	90°C
ABLS1A24050	60°C	70°C	90°C
ABLS1A48025	60°C	70°C	90°C
ABLS1A24100	60°C	70°C	90°C
ABLS1A24200	95°C	95°C	90°C


(1): Ambient

Mounting and Clearance


Mounting


Mounting Position A



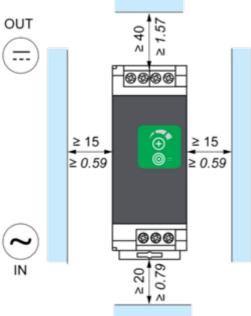


Mounting Position B

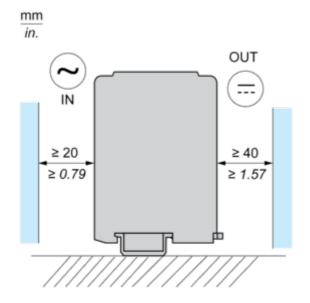


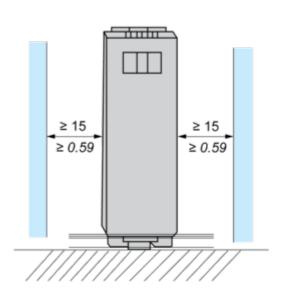



Mounting Position C

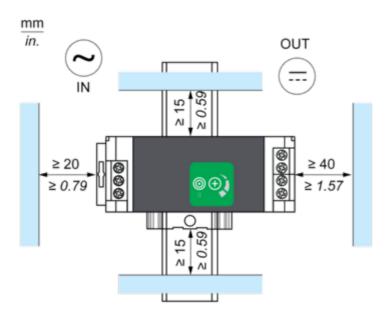


Incorrect Mounting







Performance Curve

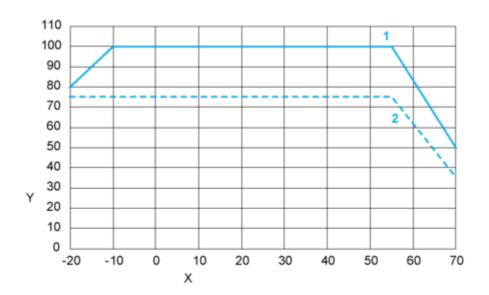

X: Surrounding Air Temperature (°C)
Y: Percentage of Maximum Load (%)

1 : Position A
2 : Position B + C

Note: Altitude ≤ 2000 m (6561 ft)