




213354 OGWTI-50G3-T4 Frame light barrier

- IO-Link
- Fork structure
- Robust metal housing
- Compact design
- High resolution
- Short response time
- Intuitive teach-in using a membrane keyboard and with fine adjustment
- Operating principle: dynamic or static
- 4 operating modes as an IO-Link parameter

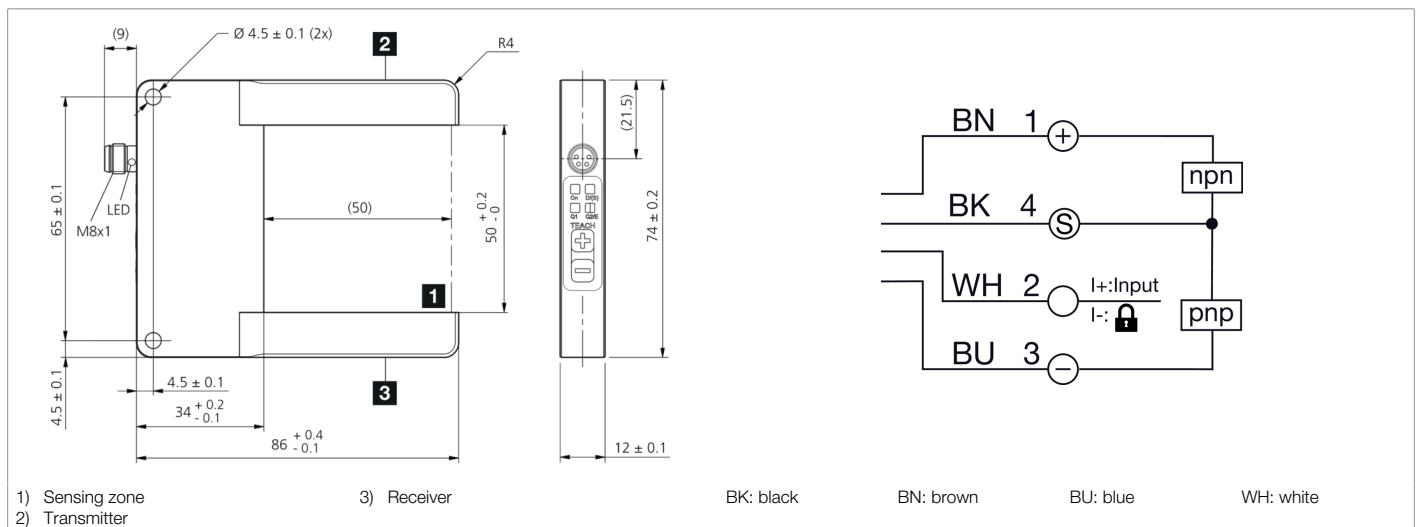

Function



Technical data (typ.)

+20°C, 24 V DC

Service voltage	18 ... 30 V DC
No-load current (max.)	< 45 mA
Inverse polarity protection	Yes
Short-circuit protection	Yes
Housing dimensions	86 x 74 x 12 mm
Housing material	Die-cast zinc (Black, powder-coated)
Material	Plastic (Window)
Weight	130 g
Operating principle	Optical
Evaluation	Switching, Dynamic/static switchable
Design	Fork
Operating modes	Static, Dynamic, Shadowing
Switching output	Push-pull, 100 mA, NO/NC, switchable
Voltage drop (max.)	2 V
Interface	■ IO-Link V1.1.3, COM2 (Smart Sensor Profile) ■ 2nd Edition V1.1 SSP 4.1.1
Pulse stretching	20 ms adjustable
Light source	LED
Color	Infrared
Detection range	50 x 50 mm
Resolution	Ø 1,0 mm (dynamic), Ø 1,5 mm (static)



213354
OGWTI-50G3-T4
Frame light barrier

Technical data (typ.)		+20°C, 24 V DC
Sensitivity adjustment		Keypad
Display		LED Green - Status, yellow - Switching output 1, white - static/dynamic, yellow/red - Switching output 2 / Warning
Response time		0,05 ms
Release time		0,05 ... 10.000 ms
Ambient temperature during operation		-10 ... +60 °C
Protection type		IP 67
Connection		Connector, M8, 4-pin
Connection cable		TK ... /4
More information / accessories		https://www.di-soric.com/213354