


LR series

Chip Type, High Voltage.



- Chip Type, high Voltage.
- Applicable to automatic mounting machine using carrier tape.
- Adapted to the RoHS directive (2011/65/EU).




Specifications

Item	Performance Characteristics	
Category Temperature Range	-40 to +105°C	
Rated Voltage Range	160 to 500V	
Rated Capacitance Range	2.7 to 39μF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.04CV +100(μA).	
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C	
	Rated voltage (V)	160 200 250 400 450 500
	tan δ (MAX.)	0.20 0.20 0.25 0.25 0.30 0.30
Stability at Low Temperature	Measurement frequency: 120Hz	
	Rated voltage (V)	160 200 250 400 450 500
	Impedance ratio ZT / Z20 (MAX.)	Z-40°C / Z+20°C 6 6 10 10 15 15
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 3000 hours at 105°C.	
	Capacitance change	Within ±20% of the initial capacitance value
	tan δ	200% or less than the initial specified value
	Leakage current	Less than or equal to the initial specified value
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.	
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the characteristic requirements listed at right when they are removed from the plate.	
	Capacitance change	Within ±10% of the initial capacitance value
	tan δ	Less than or equal to the initial specified value
	Leakage current	Less than or equal to the initial specified value
Marking	Black print on the case top.	

Chip Type

(φ8 × 10L, φ10)

Voltage(2G : 400V)

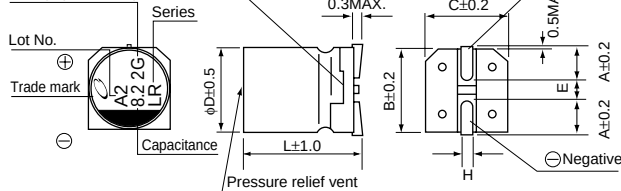


φD×L (mm)	8×10	10×10	10×13.5
A	2.9	3.2	3.2
B	8.3	10.3	10.3
C	8.3	10.3	10.3
E	3.1	4.5	4.5
L	10	10	13.5
H	0.8 to 1.1	0.8 to 1.1	0.8 to 1.1

Voltage

V	160	200	250	400	450	500
Code	2C	2D	2E	2G	2W	2H

Type numbering system (Example : 400V 8.2μF)

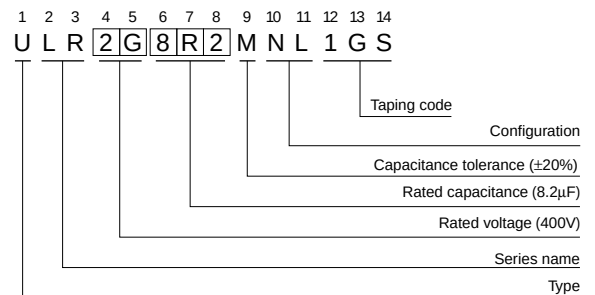

Dimensions

Cap. (μF)	V Code	160 2C	200 2D	250 2E	400 2G	450 2W	500 2H
2.7	2R7						8×10 20
3.9	3R9					8×10 25	10×10 35
4.7	4R7				8×10 35		10×13.5 40
5.6	5R6						
6.8	6R8					10×10 40	
8.2	8R2				10×10 50	10×13.5 45	
10	100			8×10 35			
12	120		8×10 50		10×13.5 55		
15	150	8×10 50		10×10 50			
22	220		10×10 65	10×13.5 55			
27	270	10×10 65					
33	330		10×13.5 70				
39	390	10×13.5 70					Case size φD×L (mm) Rated ripple

Rated ripple current (mArms) at 105°C 120Hz

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.80	1.00	1.25	1.40	1.60

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

CAT.8100C