



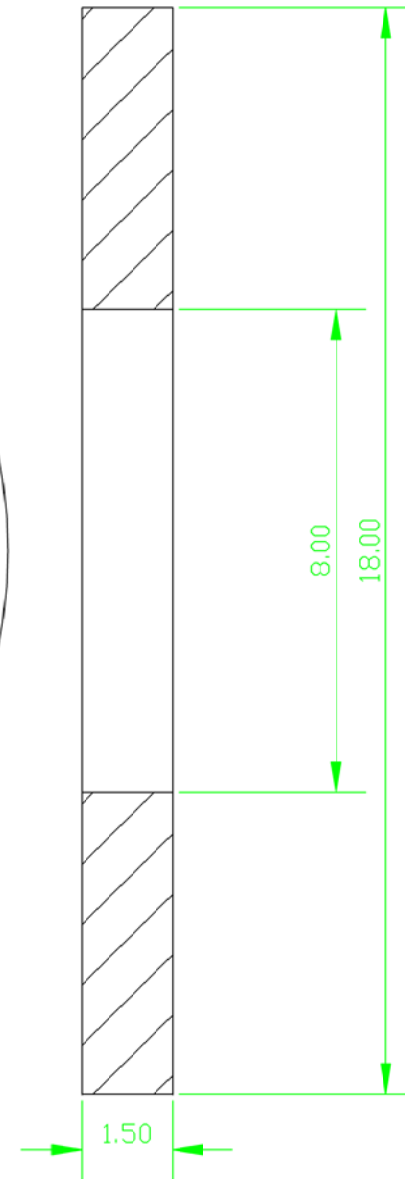

ISSUE

1

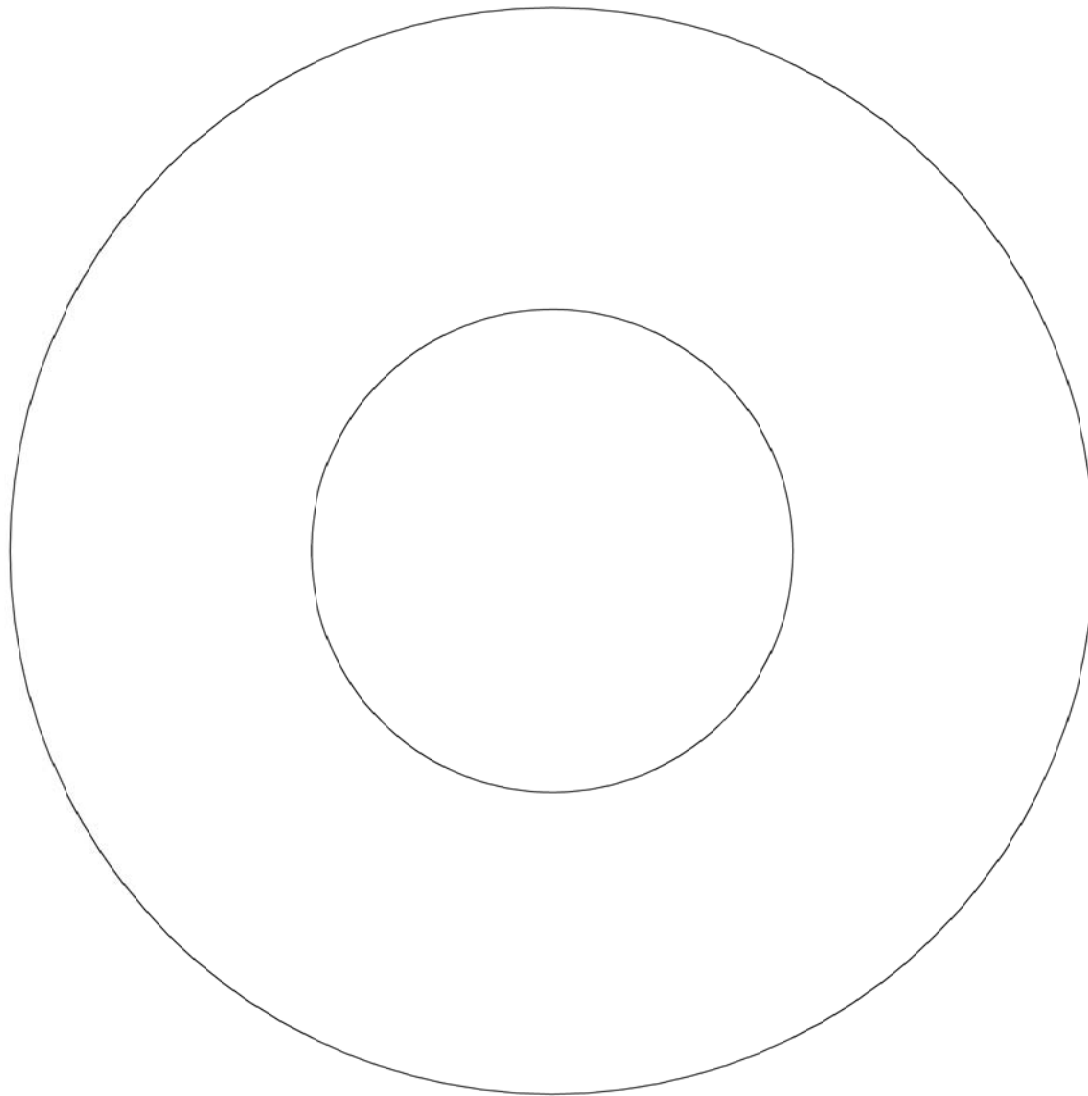

A4

igus N0.



igus UK LTD
51a CASWELL RD
BRACKMILLS IND EST
NN4 7PW
UNITED KINGDOM ©

ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED
TOLERANCES EXCEPT WHERE OTHERWISE STATED

WHOLE NOs.	±0.4	HOLE DIAS.	+0.10
1 DEC. PL.	±0.2		-0.03
2 DEC PL.	±0.1	ANGLES	±0.5°

REFERENCE DIMENSIONS ARE NOT CRITICAL (DO NOT INSPECT)

DRN.

APP'D

SCALE

1:1

MATERIAL

iglidur J

NTL MAT'L CODE

FINISH

TITLE

DRG. NO.

JTM-0818-015



IGLIDUR J PLAIN BEARING MATERIAL – TECHNICAL DATA SHEET

DIN 1494 & 1850

Density	1.49 g/cm ³
Colour	Yellow
Dynamic sliding coefficient of friction against steel	0.06 – 0.18
Maximum Bending Strength	73 MPa
Modulus of Elasticity (DIN 53455)	2400 MPa
Permissible mean surface static pressure @ 20°C	35 N/mm ²
Shore D Hardness	74
Continuous Service Temperature	-50°C to +90°C
Maximum Service Temperature (Short term)	120°C
Thermal Conductivity (ASTM G177)	0.3 W/m . k
Linear thermal expansion coefficient (DIN 53752)	11 x 10 ⁻⁵
Fire Classification UL 94 (IEC707, DIN VDE 0304 Part 3)	HB
Moisture Absorption @ RH 50/23°C	0.3 % (by weight)
Maximum Moisture Absorption	1.3 % (by weight)
Specific volume resistance (VDE 030)	10 ¹³ Ω cm
Surface Resistance (DIN 53842)	10 ¹² Ω
Recommended Housing Bore Tolerance	H7
Recommended Shaft Tolerance	h9

The data given above is provided in good faith and is the result of laboratory tests and experience. This data should be used as a guide only, and igus is not under any obligation regarding this information. A practical test is always recommended to confirm our findings.

1) without any additional load; no sliding movement; possible relaxation of bearing press fit