

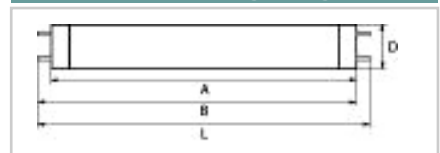
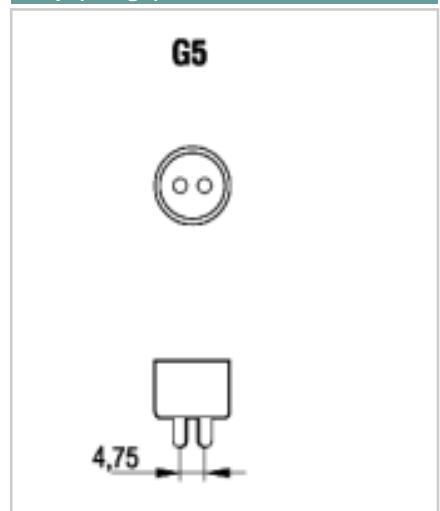
**Product selected: FHO80W/840**

A new generation of triphosphor High Output slim linear fluorescent tubes offering superior colorimetric, photometric and lumen maintenance performance. Particularly suitable for use in the new low profile recessed and suspended luminaires and modular systems. 2. FHO - Fluorescent High Output is the optimised solution for indirect lighting.

Applications	Features
<ul style="list-style-type: none"> <li>- Industrial and commercial lighting</li> <li>- Shops</li> <li>- Department stores</li> <li>- Restaurants and reception areas</li> </ul>	<ul style="list-style-type: none"> <li>- Higher lumen output: from 1850 lm to 4900 lm</li> <li>- Almost constant lumen maintenance throughout the entire life of the lamp due to Luxline Plus triphosphor technology</li> <li>- High colour rendering (Ra85/Class1B)</li> <li>- For electronic ballast operation only giving greater efficiency and advantages in improved starting and life performance</li> <li>- Optimised ambient operating temperature at 35° C (max lumen output) allows compact luminaire designs</li> <li>- Reduced storage volume and transportation costs</li> <li>- Average rated life: up to 20000 hours</li> </ul>

Product Attributes	
Item description	FHO80W/840
Nominal wattage (W)	80
Rated Wattage (W) 50 Hz	-
Rated Wattage (W) HF	76.8
Bulb finish	Coolwhite Deluxe
Cap	G5
Max. Over. Length A base to base [mm]	1449
Length B pin to base [mm]	1453.7 - 1456.1
Max. Overall Lamp length L [mm]	1463.2
Diameter D [mm]	16
Mercury content per lamp (mg)	3.2
Colour rendering Index - CRI (class / %)	1B/85
Colour temperature (K)	4000
Nominal luminous flux at 25°C (lm)	6150
Nominal luminous flux at 35°C (lm)	7000
Lumen maintenance min. 2000 h (50 Hz)	-
Lumen maintenance min. 4000 h (50 Hz)	-
Lumen maintenance min. 6000 h (50 Hz)	-
Lumen maintenance min. 8000 h (50 Hz)	-
Lumen maintenance min. 12000 h (50 Hz)	-
Lumen maintenance min. 16000 h (50 Hz)	-
Lumen maintenance min. 20000 h (50 Hz)	-
Lumen maintenance min. 2000 h (HF preheat)	0.96
Lumen maintenance min. 4000 h (HF preheat)	0.94
Lumen maintenance min. 6000 h (HF preheat)	0.93
Lumen maintenance min. 8000 h (HF preheat)	0.92
Lumen maintenance min. 12000 h (HF preheat)	0.91
Lumen maintenance min. 16000 h (HF preheat)	0.9
Lumen maintenance min. 20000 h (HF preheat)	0.88
Ambient temperature for max. lumen flux (°C)	35
Rated luminous flux at 25°C (lm)	5952
Rated lamp efficacy (lm/W) at 100 h - 50 Hz, 25°C	77.5
Nominal average life (h)	24000
Survival factor 2000 h (50 Hz)	-
Survival factor 4000 h (50 Hz)	-
Survival factor 6000 h (50 Hz)	-
Survival factor 8000 h (50 Hz)	-

**Product Image**

**Product line drawing (image)**

**Cap (image)**


Survival factor 12000 h (50 Hz)	-
Survival factor 16000 h (50 Hz)	-
Survival factor 20000 h (50 Hz)	-
Survival factor 2000 h (HF)	0.99
Survival factor 4000 h (HF)	0.98
Survival factor 6000 h (HF)	0.96
Survival factor 8000 h (HF)	0.94
Survival factor 12000 h (HF)	0.93
Survival factor 16000 h (HF)	0.9
Survival factor 20000 h (HF)	-
ILCOS-code	-
Packing Quantity	25
EAN Code	5410288027852
Ordering Code	0002785

### Quality seal



Conformité Européenne



Waste of Electrical and Electronic Equipment (WEEE)

Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (ROHS)

### Fixture rating



### Relative Spectral Power Distribution

