




Essentials

Data sheet

LED Lamp MR16

UK



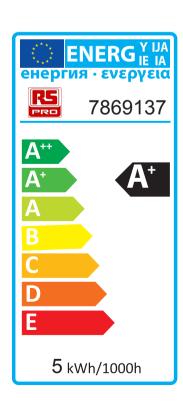







MR16 LED spot bulb

UK

Key Features

- 5W LED lamp as 40W MR16 replacement
- · GU5.3 base
- · AC/DC 12V input voltage
- · Non-dimmable
- · Mercury free
- · 2 years guarantee

Common Characteristics¹

Average lifetime: 25.000 h²

Switching cycles

(30s on, 30s off): 20.000 times Casing Material: Aluminum Starting time max.: < 0.5s Warm up time for 60% light: < 1s

Power factor: N/A Mercury max.: 0.0mg Length: 56mm Diameter: 50mm Weight: 40g

Characteristics Range¹

Input power: 5W

Luminous flux: $\Phi450 \text{lm} / \Phi_{120^{\circ}} 365 \text{lm} (AC)$

Φ435lm / Φ_{120°}355lm (DC)

RS Article No.	Color temperature
7869124	3000 K = Warm white
7869128	4000 K = Cool white
7869137	4000 K = Natural


Beam angle: 120 degree

CRI: ≥ 80

All the technical parameters apply to the entire lamp. In view of the complex manufacturing process for light emitting diodes, the typical values given above for the technical LED parameters are merely statistical values that do not necessarily correspond to the actual technical parameters of an individual product; individual products may vary from the typical values.

² The lifetime is estimated at room temperature(25 ℃), free air burning, base up burning position and at rated voltage. To achieve a full lifetime a good heat exchange for the electronic components is required.

Technical Drawing



Lamp Conformity

2004/108/EC


Electromagnetic compatibility(EMC) EN55015/A2:2009 Limits and methods of measurement of radio disturbance


EN61547:2009

Electromagnetic compatiblity immunity requirements 2011/65/EU

Restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS II)

Equivalent





Proper Use

Suitable for indoor use.
For outdoor applications
and operation in damp locations
special approved fixture
are required.
Operating temperature range

Application

Household luminaires Hotels Hospitals Office space

between -15℃ and 40℃.

Caution

Please take the time to read this installation guide. The guide contains important information and notes regarding the installation and operation.

DISCLAIMER:

We disclaims liability for any direct, indirect or incidental damages in case of installation performed either not according to this guide or not performed by a professional electrician.

Safety instruction

Always switch off the power supply before replacing. Only to apply in dry indoor usage and environments, outdoor applications requires an IP rated fixtures. Do not change the structure or an components of the LED lamp to ensure safety. Please read the installation instruction very carefully and follow the wiring instructions to ensure safety.

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.

¹ Typical values.