

## Base strip - PC 4/11-G-7,62 - 1804881

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



The figure shows a 5-pos. version of the product


Header, Nominal current: 20 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Color: green, Contact surface: Tin, Mounting: Soldering, Mounting flange: Accessory Order No. 1827570

### Why buy this product

- ✓ PCB-SHIELD shroud for a professional EMC shield connection
- ✓ Vibration-resistant connection by means of separate BF-PC 4 mounting flanges (also for screw connection in the device)
- ✓ CP-PC RD coding profiles as protection against mismatching
- ✓ PC 4 headers for use in combination with all PC 4 plugs



### Key Commercial Data

Packing unit	50 pc
GTIN	 4 017918 046323
Weight per Piece (excluding packing)	19.61 g
Custom tariff number	85366990
Country of origin	Germany
Note	Made to Order (non-returnable)

### Technical data

#### Dimensions

Length	29 mm
Pitch	7.62 mm
Dimension a	76.2 mm
Width	83.8 mm
Constructional height	15 mm
Height	20 mm
Length of the solder pin	5 mm
Pin dimensions	1 x 0,8 mm
Hole diameter	1.3 mm

## Base strip - PC 4/11-G-7,62 - 1804881

### Technical data

#### General

Range of articles	PC 4/...-G
Insulating material group	I
Rated surge voltage (III/3)	6 kV
Rated surge voltage (III/2)	6 kV
Rated surge voltage (II/2)	6 kV
Rated voltage (III/3)	400 V
Rated voltage (III/2)	630 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	20 A
Maximum load current	20 A
Insulating material	PA
Flammability rating according to UL 94	V0
Color	green
Number of positions	11

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

#### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

#### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

### Approvals

#### Approvals

## Base strip - PC 4/11-G-7,62 - 1804881

### Approvals


#### Approvals


CSA / UL Recognized / cUL Recognized / LR / GL / BV / DNV / RS / EAC / cULus Recognized


#### Ex Approvals

#### Approvals submitted

### Approval details

CSA 		
	B	C
Nominal current I <sub>N</sub>	20 A	20 A
Nominal voltage U <sub>N</sub>	300 V	300 V

UL Recognized 		
	B	C
Nominal current I <sub>N</sub>	20 A	20 A
Nominal voltage U <sub>N</sub>	300 V	300 V

cUL Recognized 		
	B	C
Nominal current I <sub>N</sub>	20 A	20 A
Nominal voltage U <sub>N</sub>	300 V	300 V

LR	
Nominal current I <sub>N</sub>	20 A
Nominal voltage U <sub>N</sub>	400 V

GL	
Nominal current I <sub>N</sub>	20 A

## Base strip - PC 4/11-G-7,62 - 1804881

### Approvals


Nominal voltage UN	400 V
--------------------	-------

BV
----

DNV
-----

RS
----

EAC
-----

cULus Recognized 
--

### Accessories

#### Accessories

#### Coding element

Coding profile - CP-PC RD - 1701967



Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red

#### Flange

Accessories - BF-PC 4 - 1827570



Mounting flange, is snapped onto the left and right of the headers, for screw connection with PC 4/...-STF-7.62

Accessories - POWERCOMBICON PCB-SHIELD - 1968387



## Base strip - PC 4/11-G-7,62 - 1804881

### Accessories

---

#### Additional products

Printed-circuit board connector - PC 4/11-ST-7,62 - 1804991



Plug component, Nominal current: 20 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

---

Printed-circuit board connector - PCC 4/11-ST-7,62 - 1840104



Plug component, Nominal current: 20 A, Rated voltage (III/2): 1000 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Crimp connection, Color: green, Corresponding female crimp contacts with current [A] and conductor cross section range [mm²] data: 13,5A/STG-MTN 0,5-1,0 (3190438); 13,5A/STG-MTN 0,5-1,0 BA (3190629); 20A/STG-MTN 1,5-2,5 (3190506); 20A/STG-MTN 1,5-2,5 BA (3190632). BA = Taped contacts

---

Printed-circuit board connector - PC 4/11-STF-7,62 - 1828333



Plug component, Nominal current: 20 A, Rated voltage (III/2): 630 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

---

Printed-circuit board connector - PC 4 HV/11-STF-7,62 - 1880164




Plug component, Nominal current: 20 A, Rated voltage (III/2): 1000 V, Number of positions: 11, Pitch: 7.62 mm, Connection method: Screw connection, Color: green, Contact surface: Tin

---


### Drawings

## Base strip - PC 4/11-G-7,62 - 1804881


Drilling diagram



Dimensional drawing

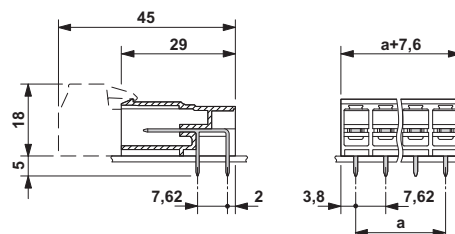

Diagram

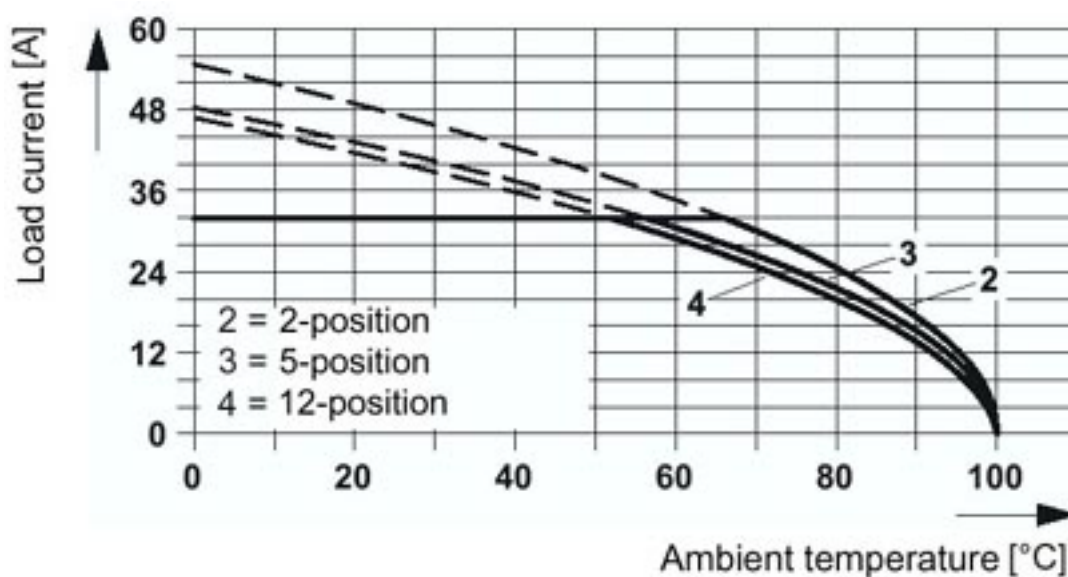

The illustration shows the derating curve for plugs PC 5/...-ST-7,62 in combination with header PC 4/...-G-7,62.