

2200072

https://www.phoenixcontact.com/in/products/2200072

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



DIN rail housing for use in distribution boards in accordance with DIN 43880, Lower housing part with base latch, width: 161.6 mm, height: 89.7 mm, depth: 48.9 mm, color: black (similar RAL 9005), cross connection: DIN rail connector (optional), number of positions cross connector: 16

### Your advantages

- · Coordinated housing and connection system for faster device development
- · Individual online configuration for diverse applications in building automation
- · Variety of connection technology
- · Can be mounted on the DIN rail or the wall
- · With DIN-rail-mountable bus connector and power connector system as an option
- · Tool-free mounting
- Available in overall widths from 1 ... 9 width units (17.8 mm ... 161.6 mm)
- Compliant with DIN EN 43880

#### Commercial data

Item number	2200072
Packing unit	80 pc
Minimum order quantity	480 pc
Sales key	ACH
Product key	ACHBAA
GTIN	4046356516020
Weight per piece (including packing)	90.5 g
Weight per piece (excluding packing)	63.9 g
Customs tariff number	84879090
Country of origin	DE



2200072

https://www.phoenixcontact.com/in/products/2200072

### Technical data

#### Notes

Assembly note	Please observe the application note in the download area.
Product properties	

#### Pr

Product type	Enclosure bottom part
Housing type	DIN rail housing for use in distribution boards in accordance with DIN 43880
Housing series	BC
Product family	BC 161,6
Max. number of positions	0)
Туре	Lower housing part with base latch
Ventilation openings present	no

#### **Dimensions**

Dimensional drawing	d
Width	161.6 mm
Height	89.7 mm
Depth	48.9 mm
Horizontal pitch	9 Div.
PCB design	
PCB thickness	1.4 mm 1.8 mm

#### Material specifications

Color (Housing)	black (RAL 9005)
Flammability rating according to UL 94	V0
CTI according to IEC 60112	< 400
Housing material	PC
Surface characteristics	untreated

#### Environmental and real-life conditions

#### Vibration test

Specification	IEC 60068-2-6:2007-12
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min



2200072

https://www.phoenixcontact.com/in/products/2200072

	0.15 mm (10 Hz 58.1 Hz)
Acceleration	2g (58.1 Hz 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
low-wire test	
Specification	IEC 60695-2-11:2014-02
Temperature	850 °C
Time of exposure	30 s
echanical strength / tumbling barrel	
Specification	IEC 60068-2-31:2008-05
Height of fall	50 cm
Frequency	50
nocks	
Specification	IEC 60068-2-27:2008-02
Pulse shape	Half-sine
Acceleration	15g
Shock duration	11 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
est for substances that would hinder coating with paint or Specification	VDMA 24364:2018-05
est for substances that would hinder coating with paint or	varnish
est for substances that would hinder coating with paint or Specification Result	VDMA 24364:2018-05
est for substances that would hinder coating with paint or Specification Result	varnish VDMA 24364:2018-05
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code)	varnish  VDMA 24364:2018-05  Test passed
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code) Specification Result, degree of protection, IP code	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code) Specification Result, degree of protection, IP code	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code) Specification Result, degree of protection, IP code	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code) Specification Result, degree of protection, IP code mbient conditions Max. IP code to attain	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C
est for substances that would hinder coating with paint or Specification  Result  egree of protection (IP code)  Specification  Result, degree of protection, IP code  mbient conditions  Max. IP code to attain  Ambient temperature (operation)	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code) Specification Result, degree of protection, IP code mbient conditions Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport)	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C
est for substances that would hinder coating with paint or Specification  Result  egree of protection (IP code)  Specification  Result, degree of protection, IP code  mbient conditions  Max. IP code to attain  Ambient temperature (operation)  Ambient temperature (storage/transport)  Ambient temperature (assembly)	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C  -5 °C 100 °C
est for substances that would hinder coating with paint or Specification  Result  egree of protection (IP code)  Specification  Result, degree of protection, IP code  mbient conditions  Max. IP code to attain  Ambient temperature (operation)  Ambient temperature (storage/transport)  Ambient temperature (assembly)  Relative humidity (storage/transport)	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C  -5 °C 100 °C
est for substances that would hinder coating with paint or Specification  Result  egree of protection (IP code)  Specification  Result, degree of protection, IP code  mbient conditions  Max. IP code to attain  Ambient temperature (operation)  Ambient temperature (storage/transport)  Ambient temperature (assembly)  Relative humidity (storage/transport)	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C  -5 °C 100 °C  95 %
est for substances that would hinder coating with paint or Specification  Result  egree of protection (IP code)  Specification  Result, degree of protection, IP code  mbient conditions  Max. IP code to attain  Ambient temperature (operation)  Ambient temperature (storage/transport)  Ambient temperature (assembly)  Relative humidity (storage/transport)  B data  Number of PCB holders	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C  -5 °C 100 °C  95 %
est for substances that would hinder coating with paint or Specification Result egree of protection (IP code) Specification Result, degree of protection, IP code  mbient conditions Max. IP code to attain Ambient temperature (operation) Ambient temperature (storage/transport) Ambient temperature (assembly) Relative humidity (storage/transport)  B data Number of PCB holders Type of PCB mount Thickness of the PCB	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C  -5 °C 100 °C  95 %  9  Latching
est for substances that would hinder coating with paint or Specification  Result  egree of protection (IP code)  Specification  Result, degree of protection, IP code  mbient conditions  Max. IP code to attain  Ambient temperature (operation)  Ambient temperature (storage/transport)  Ambient temperature (assembly)  Relative humidity (storage/transport)  B data  Number of PCB holders  Type of PCB mount	VDMA 24364:2018-05  Test passed  IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08  IP20  IP20  -40 °C 105 °C (depending on power dissipation)  -40 °C 70 °C  -5 °C 100 °C  95 %  9  Latching

Packaging specifications



2200072

https://www.phoenixcontact.com/in/products/2200072


Type of packaging	packed in cardboard
Outer packaging type	Carton



2200072

https://www.phoenixcontact.com/in/products/2200072

### Drawings

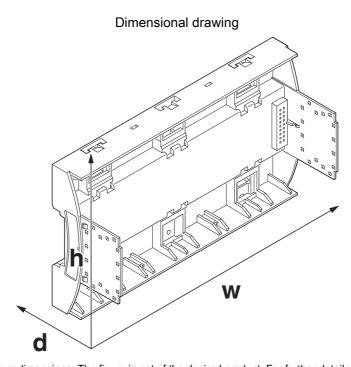

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.



2200072

https://www.phoenixcontact.com/in/products/2200072

### **Approvals**

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/in/products/2200072



**UL Recognized**Approval ID: E240868



2200072

https://www.phoenixcontact.com/in/products/2200072

### Classifications

#### **ECLASS**

	ECLASS-11.0	27182702	
	ECLASS-13.0	27190601	
ETIM			
	ETIM 9.0	EC002779	
UNSPSC			
	UNSPSC 21.0	31261500	



2200072

https://www.phoenixcontact.com/in/products/2200072

### Environmental product compliance

EU RoHS		
Fulfills EU RoHS substance requirements	Yes, No exemptions	
China RoHS		
Environment friendly use period (EFUP)	EFUP-E	
	No hazardous substances above the limits	
EU REACH SVHC		
REACH candidate substance (CAS No.)	No substance above 0.1 wt%	



2200072

https://www.phoenixcontact.com/in/products/2200072

### Mandatory accessories

#### BC 161,6 OT U11 BK VPE80 - Upper housing part

1006944

https://www.phoenixcontact.com/in/products/1006944



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U11) with vents, Installation depth connection technology: 11.1 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

#### BC 161,6 OT 212122 KMGY VPE80 - Upper housing part

1015337

https://www.phoenixcontact.com/in/products/1015337





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 222121 BK - Upper housing part

1046793

https://www.phoenixcontact.com/in/products/1046793



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

### BC 161,6 OT 020222 GY7035 - Upper housing part

1048934

https://www.phoenixcontact.com/in/products/1048934





2200072

https://www.phoenixcontact.com/in/products/2200072

### BC 161,6 OT 121222 BK VPE80 - Upper housing part

1059320

https://www.phoenixcontact.com/in/products/1059320



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

### BC 161,6 OT 202220 KMGY VPE80 - Upper housing part

1074661

https://www.phoenixcontact.com/in/products/1074661





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 120002 KMGY - Upper housing part

1080054

https://www.phoenixcontact.com/in/products/1080054



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 110202 KMGY VPE80 - Upper housing part

1080949

https://www.phoenixcontact.com/in/products/1080949





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 120202 KMGY MOQ100 - Upper housing part

1087950

https://www.phoenixcontact.com/in/products/1087950



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 1C1C2C2C1C1C KMGY - Upper housing part

1096568

https://www.phoenixcontact.com/in/products/1096568





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 220222 KMGY MOQ100 - Upper housing part

1126202

https://www.phoenixcontact.com/in/products/1126202



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 110212 KMGY MOQ100 - Upper housing part

1153038

https://www.phoenixcontact.com/in/products/1153038





2200072

https://www.phoenixcontact.com/in/products/2200072

### BC 161,6 OT 0C20C20C2 KMGY - Upper housing part

1218565

https://www.phoenixcontact.com/in/products/1218565



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 0C20C20C2 WH - Upper housing part

1252986

https://www.phoenixcontact.com/in/products/1252986





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 112111 KMGY - Upper housing part

1255434

https://www.phoenixcontact.com/in/products/1255434



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 212121 KMGY VPE80 - Upper housing part

1300089

https://www.phoenixcontact.com/in/products/1300089





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 2P2K1P0C1D1K KMGY - Upper housing part

1335979

https://www.phoenixcontact.com/in/products/1335979



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, SPT-THR, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

#### BC 161,6 OT 112222 BK - Upper housing part

1389116

https://www.phoenixcontact.com/in/products/1389116





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 000000 BK MOQ100 - Upper housing part

1454292

https://www.phoenixcontact.com/in/products/1454292



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

#### BC 161,6 OT 212222 BK - Upper housing part

1684635

https://www.phoenixcontact.com/in/products/1684635





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 212121 BK - Upper housing part

1760654

https://www.phoenixcontact.com/in/products/1760654



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

### BC 161,6 OT 000020 KMGY - Upper housing part

2201450

https://www.phoenixcontact.com/in/products/2201450





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 002000 KMGY - Upper housing part

2201451

https://www.phoenixcontact.com/in/products/2201451



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 000022 KMGY - Upper housing part

2201454

https://www.phoenixcontact.com/in/products/2201454





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 0C0C0C0C22 KMGY - Upper housing part

2201455

https://www.phoenixcontact.com/in/products/2201455



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT U22 KMGY VPE80 - Upper housing part

2201599

https://www.phoenixcontact.com/in/products/2201599



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U22) with vents, Installation depth connection technology: 22.35 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)



2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT U22 BK - Upper housing part

2201665

https://www.phoenixcontact.com/in/products/2201665



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U22) with vents, Installation depth connection technology: 22.35 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

#### BC 161,6 OT 000C0C22 KMGY - Upper housing part

2201678

https://www.phoenixcontact.com/in/products/2201678





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 212121 KMGY - Upper housing part

2201869

https://www.phoenixcontact.com/in/products/2201869



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 112122 KMGY - Upper housing part

2201881

https://www.phoenixcontact.com/in/products/2201881





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 111122 KMGY - Upper housing part

2201919

https://www.phoenixcontact.com/in/products/2201919



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 100202 KMGY - Upper housing part

2201976

https://www.phoenixcontact.com/in/products/2201976





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 111112 BK - Upper housing part

2201977

https://www.phoenixcontact.com/in/products/2201977



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)

#### BC 161,6 OT 111121 KMGY - Upper housing part

2201982

https://www.phoenixcontact.com/in/products/2201982





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 210021 KMGY - Upper housing part

2201984

https://www.phoenixcontact.com/in/products/2201984



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 101111 KMGY MOQ100 - Upper housing part

2202201

https://www.phoenixcontact.com/in/products/2202201





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 102222 KMGY MOQ100 - Upper housing part

2202202

https://www.phoenixcontact.com/in/products/2202202



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 020001 KMGY MOQ100 - Upper housing part

2202224

https://www.phoenixcontact.com/in/products/2202224





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 001101 KMGY - Upper housing part

2202284

https://www.phoenixcontact.com/in/products/2202284



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 001112 KMGY MOQ100 - Upper housing part

2202287

https://www.phoenixcontact.com/in/products/2202287





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 221111 KMGY MOQ100 - Upper housing part

2202300

https://www.phoenixcontact.com/in/products/2202300



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 101100 KMGY VPE80 - Upper housing part

2202324

https://www.phoenixcontact.com/in/products/2202324





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 112122 KMGY MOQ100 - Upper housing part

2202326

https://www.phoenixcontact.com/in/products/2202326



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 121222 KMGY MOQ100 - Upper housing part

2202355

https://www.phoenixcontact.com/in/products/2202355





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 000C020 KMGYMOQ100 - Upper housing part

2202372

https://www.phoenixcontact.com/in/products/2202372



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 2C2C2C2C0C0C KMGY - Upper housing part

2202501

https://www.phoenixcontact.com/in/products/2202501





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 111112 KMGY - Upper housing part

2202638

https://www.phoenixcontact.com/in/products/2202638



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT U11 BK - Upper housing part

2202833

https://www.phoenixcontact.com/in/products/2202833



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U11) with vents, Installation depth connection technology: 11.1 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: black (similar RAL 9005)



2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 000000 KMGY MOQ100 - Upper housing part

2202926

https://www.phoenixcontact.com/in/products/2202926



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 111101 KMGY - Upper housing part

2203095

https://www.phoenixcontact.com/in/products/2203095





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT 020202 KMGY - Upper housing part

2203502

https://www.phoenixcontact.com/in/products/2203502



DIN rail housing for use in distribution boards in accordance with DIN 43880, modular upper housing part, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

### BC 161,6 OT 012122 KMGY - Upper housing part

2203722

https://www.phoenixcontact.com/in/products/2203722





2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 OT U11 KMGY - Upper housing part

2278513

https://www.phoenixcontact.com/in/products/2278513



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U11) with vents, Installation depth connection technology: 11.1 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

#### BC 161,6 OT U22 KMGY - Upper housing part

2278526

https://www.phoenixcontact.com/in/products/2278526



DIN rail housing for use in distribution boards in accordance with DIN 43880, Upper housing part (U22) with vents, Installation depth connection technology: 22.35 mm, width: 161.6 mm, height: 89.7 mm, depth: 54.85 mm, color: light gray (similar RAL 7035)

#### Accessories



2200072

https://www.phoenixcontact.com/in/products/2200072

### BC 161,6 DKL S TRANS BK - Housing cover

1210711

https://www.phoenixcontact.com/in/products/1210711



DIN rail housing for use in distribution boards in accordance with DIN 43880, transparent hinged cover, can be sealed, width: 161.6 mm, height: 45 mm, depth: 8 mm, color: black (similar RAL 9005)

#### BC 161,6 DKL S TRANS WH - Housing cover

1252988

https://www.phoenixcontact.com/in/products/1252988



DIN rail housing for use in distribution boards in accordance with DIN 43880, transparent hinged cover, can be sealed, width: 161.6 mm, height: 45 mm, depth: 8 mm, color: transparent



2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 DKL R D2,4 TCG BK - Housing cover with touch display

1335862

https://www.phoenixcontact.com/in/products/1335862



DIN rail housing for use in distribution boards in accordance with DIN 43880, Latching cover (non-detachable), integrated capacitive 2.4" touch display, resolution: 320 x 240 Pixel(s), interface: 4-wire SPI, width: 161.6 mm, height: 45 mm, depth: 13.5 mm

#### BC 161,6 DKL R D2,4 TCG KMGY - Housing cover with touch display

1335863

https://www.phoenixcontact.com/in/products/1335863



DIN rail housing for use in distribution boards in accordance with DIN 43880, Latching cover (non-detachable), integrated capacitive 2.4" touch display, resolution:  $320 \times 240 \text{ Pixel(s)}$ , interface: 4-wire SPI, width: 161.6 mm, height: 45 mm, depth: 13.5 mm



2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 DKL R D2,4 KPG KMGY - Housing cover with touch display

1335864

https://www.phoenixcontact.com/in/products/1335864



DIN rail housing for use in distribution boards in accordance with DIN 43880, Latching cover (non-detachable), integrated capacitive 2.4" touch display, resolution: 320 x 240 Pixel(s), interface: 4-wire SPI, width: 161.6 mm, height: 45 mm, depth: 13.5 mm

#### BC 161,6 DKL S TRANS WOP - Housing cover

1361183

https://www.phoenixcontact.com/in/products/1361183



DIN rail housing for use in distribution boards in accordance with DIN 43880, transparent hinged cover, can be sealed, without insertion plate, width: 161.6 mm, height: 45 mm, depth: 8 mm, color: transparent



2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 DKL R BK9005 - Housing cover

2201664

https://www.phoenixcontact.com/in/products/2201664



DIN rail housing for use in distribution boards in accordance with DIN 43880, Latching cover (non-detachable), width: 161.6 mm, height: 45 mm, depth: 8 mm, color: black (similar RAL 9005)

#### BC 161,6 DKL S KMGY - Housing cover

2202451

https://www.phoenixcontact.com/in/products/2202451



DIN rail housing for use in distribution boards in accordance with DIN 43880, Hinged cover, can be sealed, width: 161.6 mm, height: 45 mm, depth: 8 mm, color: light gray (similar RAL 7035)



2200072

https://www.phoenixcontact.com/in/products/2200072

#### BC 161,6 DKL S TRANS - Housing cover

2278542

https://www.phoenixcontact.com/in/products/2278542



DIN rail housing for use in distribution boards in accordance with DIN 43880, transparent hinged cover, can be sealed, including insertion plate, width: 161.6 mm, height: 45 mm, depth: 8 mm, color: light gray (similar RAL 7035)

#### HBUS8 161,6-8P-1S BK - DIN rail bus connectors

1249066

https://www.phoenixcontact.com/in/products/1249066



DIN rail connector, color: black, nominal current: 3 A (per contact), rated voltage (III/2): 100 V, number of positions: 8, product range: BC 161,6.., pitch: 2.54 mm, mounting: DIN rail mounting, locking: without



2200072

https://www.phoenixcontact.com/in/products/2200072

#### HBUS 161,6-16P-1S BK - DIN rail bus connectors

2278555

https://www.phoenixcontact.com/in/products/2278555



DIN rail connector, color: black, nominal current: 3 A (Total current of 25 A max.), rated voltage (III/2): 30 V, number of positions: 16, product range: BC 161,6.., pitch: 2.54 mm, mounting: DIN rail mounting, locking: without

#### HBUS8-B SET BK - Protective cap

1252176

https://www.phoenixcontact.com/in/products/1252176



Set of 3 caps, for protecting unused DIN rail bus connectors, simply snap on to fit



2200072

https://www.phoenixcontact.com/in/products/2200072

#### HBUS-B SET BK - Protective cap

2278173

https://www.phoenixcontact.com/in/products/2278173



Set of 3 caps, for protecting unused DIN rail bus connectors, simply snap on to fit

#### PSTD 0,65X0,65/9-1-2,54 - Pin strip

1252180

https://www.phoenixcontact.com/in/products/1252180



Pin strip, color: black, nominal current: 3 A (per contact), rated voltage (III/2): 100 V, contact connection type: Pin, number of potentials: 9, number of rows: 1, number of positions: 9, number of connections: 9, product range: PSTD 0,65X0,65/..-1-V, pitch: 2.54 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 6.3 mm, locking: without, type of packaging: packed in cardboard



2200072

https://www.phoenixcontact.com/in/products/2200072

#### PSTD 0,65X0,65/9-2,54 - Pin strip

2200700

https://www.phoenixcontact.com/in/products/2200700



Pin strip, color: black, contact connection type: Pin, number of potentials: 18, number of rows: 2, number of positions: 18, number of connections: 18, product range: PSTD 0,65X0,65/..-V, pitch: 2.54 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.5 mm, locking: without, type of packaging: packed in cardboard

#### PSTD 0,65X0,65/9-3IS-2,54 - Pin strip

1252178

https://www.phoenixcontact.com/in/products/1252178



Pin strip, color: black, nominal current: 3 A (per contact), rated voltage (III/2): 100 V, contact connection type: Pin, number of potentials: 9, number of rows: 1, number of positions: 9, number of connections: 9, pitch: 2.54 mm, mounting: THR soldering, pin layout: Linear pinning, solder pin [P]: 2.5 mm, locking: without, type of packaging: packed in cardboard



2200072

https://www.phoenixcontact.com/in/products/2200072

#### PSTD 0,65X0,65/18-3IS-2,54 - Pin strip

2202993

https://www.phoenixcontact.com/in/products/2202993



Pin strip for connecting an additional PCB or PCB with hole pattern to the HBUS

#### FUSSRIEGEL 14,4 L30 SPERR OG - Base latch

2896998

https://www.phoenixcontact.com/in/products/2896998



DIN rail housing for use in distribution boards in accordance with DIN 43880, Base latch, width: 14.4 mm, height: 29.8 mm, depth: 5.9 mm, color: orange (similar RAL 2003)



2200072

https://www.phoenixcontact.com/in/products/2200072

#### KP BC K4 C2 P5 - Membrane keypad

1337341

https://www.phoenixcontact.com/in/products/1337341



Membrane keypad for BC 107,6 and BC 161,6, self-adhesive, conductive silver technology, 4 keys, 2 colors, 7-pos. terminal lug, pitch: 1.0 mm, customizable in the online configurator

#### KP BC K6 C2 P7 - Membrane keypad

1337344

https://www.phoenixcontact.com/in/products/1337344



Membrane keypad for BC 107,6 and BC 161,6, self-adhesive, conductive silver technology, 6 keys, 2 colors, 7-pos. terminal lug, pitch: 1.0 mm, customizable in the online configurator



2200072

https://www.phoenixcontact.com/in/products/2200072

### BC 161,6 PLATE KMGY - Insertion plate

1150589

https://www.phoenixcontact.com/in/products/1150589

DIN rail housing for use in distribution boards in accordance with DIN 43880, Insertion plate, width: 158.3 mm, height: 41.75 mm, depth: 1.5 mm, color: light gray (similar RAL 7035)



Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT (I) Pvt. Ltd. A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420 info@phoenixcontact.co.in