


# Data sheet

Order No.: 1714901

Type: FP 1,27/ 80-FV 6,25

SMD female connector, Reflow soldering

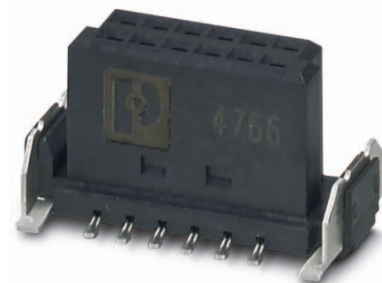

The figure shows a 12-pos. version with 12 contacts

## 1 Main features



• No. of pos.	80	• Nominal current	1.4 A
• Test voltage	500 V AC	• Mounting type	SMD soldering
• Color	black (9005)	• Connection direction	90 °
• Pitch	1.27 mm	• Type of packaging	72 mm wide tape

## 2 Your advantages

- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Compact, high-position board-to-board or wire-to-board connectors for space-saving device designs
- ✓ Stacked, coplanar or orthogonal PCB connections enable maximum flexibility in the device
- ✓ Male and female connectors of different height can be combined – for individual PCB spacing of 8 mm ... 13.8 mm



Make sure you always use the latest documentation.


It can be downloaded at: [phoenixcontact.net/product/1714901](https://phoenixcontact.net/product/1714901)

**3 Table of contents**

1	Main features.....	1
2	Your advantages .....	1
3	Table of contents .....	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data .....	4
	5.1 item properties .....	4
	5.2 Material data .....	4
6	Dimensions.....	5
	6.1 Dimensions for the product .....	5
	6.2 Dimensions for the application .....	5
7	Series drawing.....	6
8	Packaging information .....	7
9	Blister drawing.....	8
10	Application.....	9
	10.1 Temperature limit values .....	9
11	General tests .....	10
	11.1 Specification.....	10
12	Mechanical tests.....	11
	12.1 Insertion and withdrawal force per contact .....	11
	12.2 Service life .....	11
13	Electrical tests .....	12
	13.1 Electrical data .....	12
	13.2 Air and creepage distances .....	12
14	Current carrying capacity/derating curves .....	13
	14.1 Insulation resistance.....	13
	14.2 forward resistance .....	13
	14.3 Vibration test .....	13
15	Approvals .....	14
16	Commercial Data.....	15
17	Combination tests.....	16

1714901 FP 1,27/ 80-FV 6,25

**4 3D model in PDF can be activated (Acrobat Reader only)**

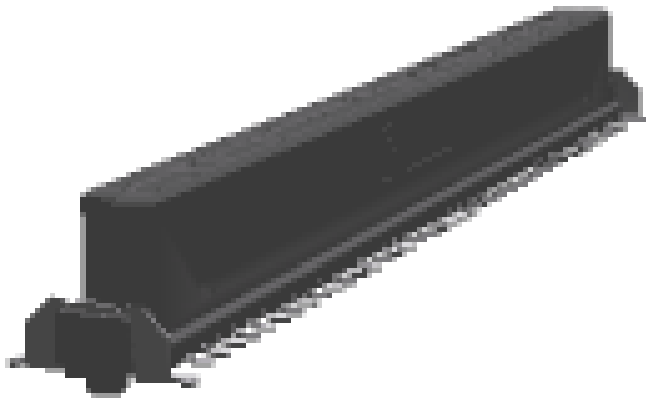

**1714901 FP 1,27/ 80-FV 6,25****5 General Technical Data****5.1 item properties**

Order No.	1714901
Type	FP 1,27/ 80-FV 6,25
Plug-in system	Fine Pitch 1,27 mm
Product type	SMD female connector
Type of contact	Female connector
Range of articles	FP 1,27/...-FV 6,25
Pitch	1.27 mm
Range of positions	12...80
Number of positions	80
Number of levels	2
Number of potentials	80
Mounting type	SMD soldering
Connection direction of the connector to the PCB	90 °
Pin layout	Linear pad geometry

**5.2 Material data**

<b>Material of metal parts</b>	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Nickel (Ni), Palladium nickel (PdNi) , Gold (Au)
Surface characteristics	Selective coating
<b>Insulating material data</b>	
Insulating material	LCP
Insulating material group	IIIa
CTI according to IEC 60112	175
Flammability rating according to UL 94	V0
Color	black (9005)

**1714901 FP 1,27/ 80-FV 6,25****6 Dimensions****6.1 Dimensions for the product**


Length	7.2 mm
Width	55.89 mm
Total height	6.95 mm
Height	6.25 mm
Base height	6.25 mm
Positioning pin geometry	ø 1.5-0.05 mm, Length of positioning pin: 0.75 mm ø 1.5-0.05 mm, Length of positioning pin: 0.75 mm
Positioning pin geometry	ø 1.5-0.05 mm, Length of positioning pin: 0.75 mm ø 1.5-0.05 mm, Length of positioning pin: 0.75 mm
Coplanarity	≤ 0.1 mm

**6.2 Dimensions for the application**

Contact cover	0.9 mm
Overlap length	1.5 mm
Medium offset	± 0.7 mm in longitudinal and transverse direction
Angular tolerance	± 4 ° in longitudinal direction
Angular tolerance	± 2 ° in transverse direction
Stacking height	8 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 1,27/...-MV 1,75)
Stacking height	9.5 mm Tolerance: +1,5 mm (in combination with Range of articles:FP 1,27/...-MV 3,25)

1714901 FP 1,27/ 80-FV 6,25


7 Series drawing

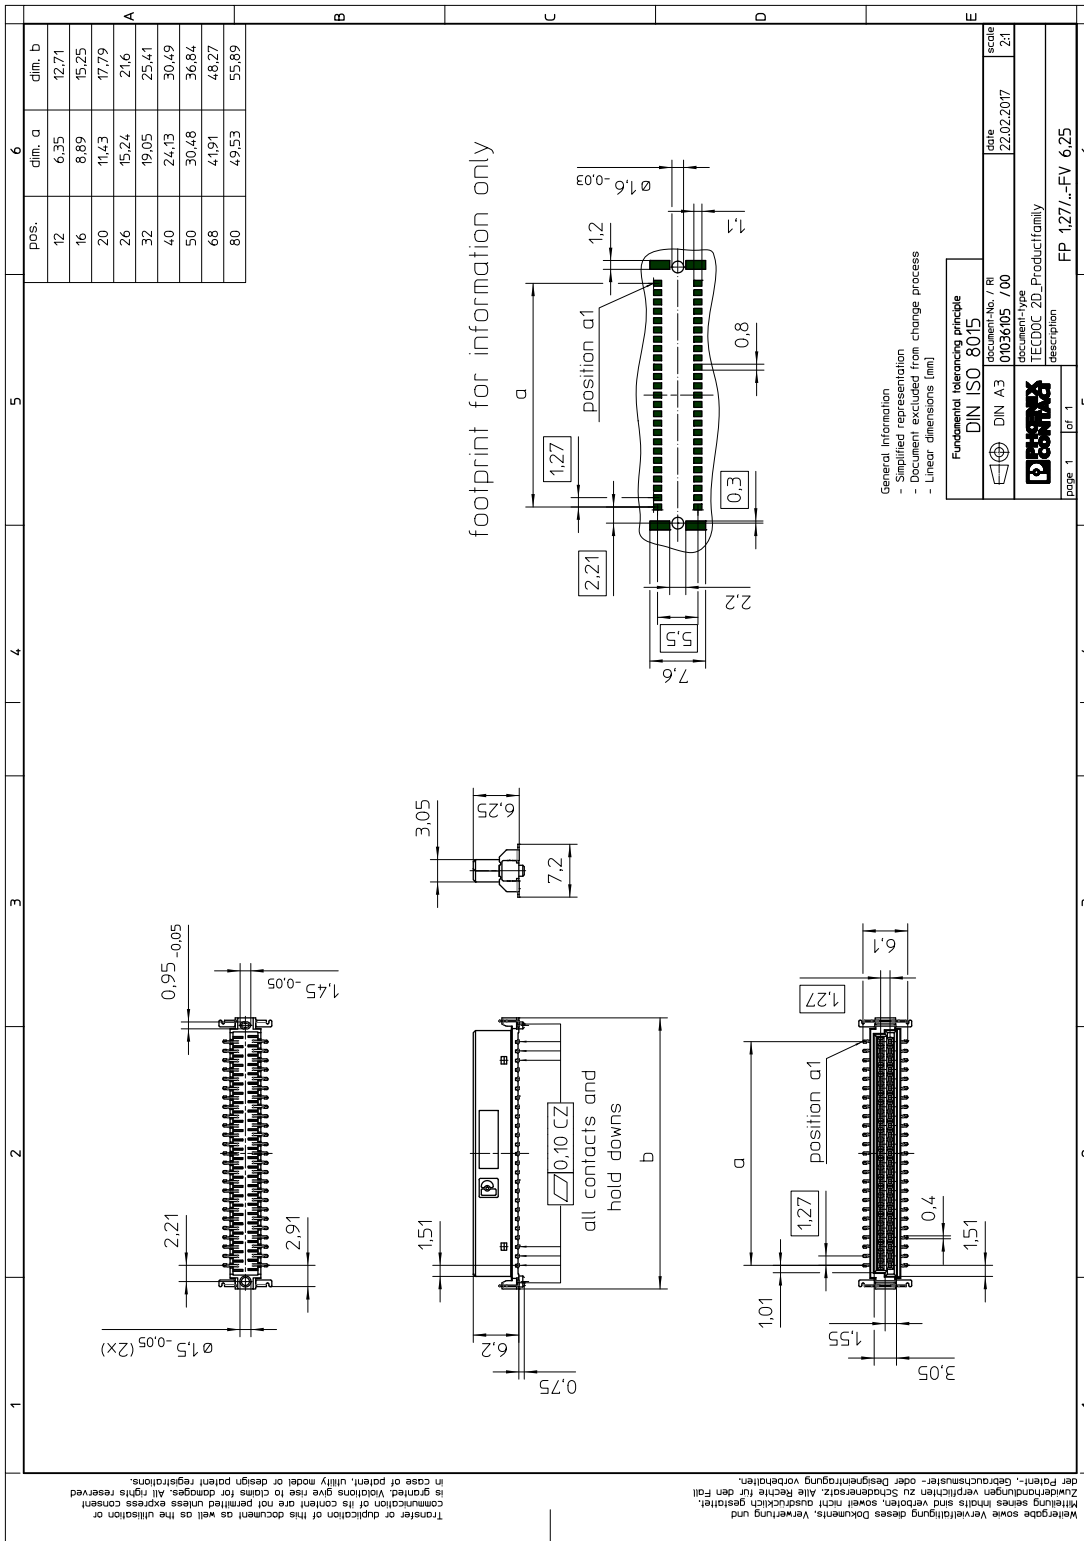

## 1714901 FP 1,27/ 80-FV 6,25


## 8 Packaging information

Type of packaging	72 mm wide tape
Note on packaging	Tape-on-reel packaging in accordance with standard DIN EN 60286-3 and EIA-481
Pieces per package	280
Outer packaging type	Transparent-Bag
[W] tape width	72 mm
[A] coil diameter	330 mm
[W2] coil overall dimension	78.4 mm
Number of products per coil	280

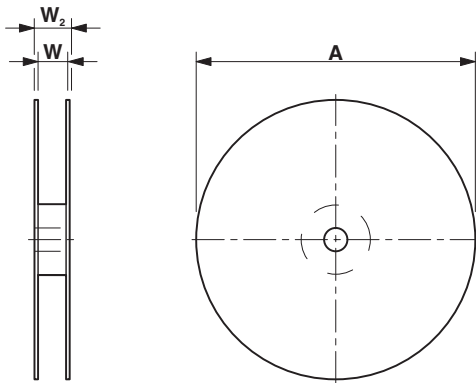

1714901 FP 1,27/ 80-FV 6,25

9 Blister drawing

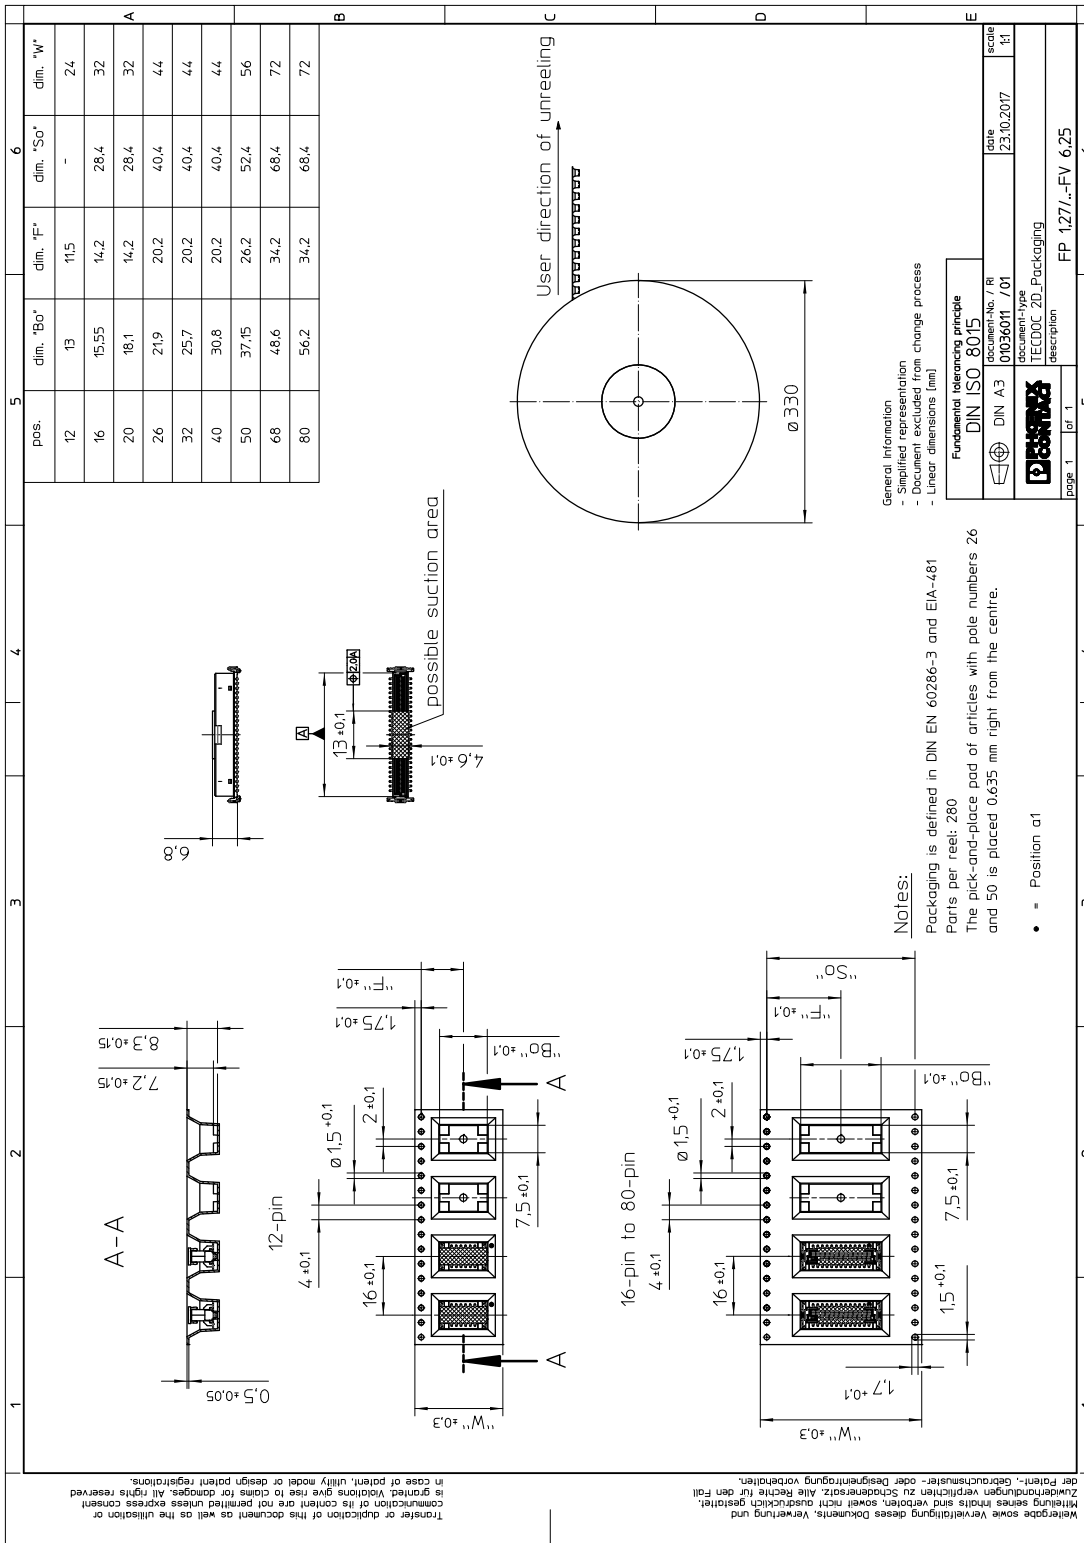



## 10 Application

### 10.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-55 °C ... 125 °C

## 11 General tests

### 11.1 Specification

Brief description

Board-to-board connectors

**1714901 FP 1,27/ 80-FV 6,25****12 Mechanical tests****12.1 Insertion and withdrawal force per contact**

Insertion and withdrawal force per contact approx. 0.5 N

**12.2 Service life**

Specification IEC 60512-9-1:2010-03 (following)

Service life 500 Insertion/withdrawal cycles, Performance level 1

**1714901 FP 1,27/ 80-FV 6,25****13 Electrical tests****13.1 Electrical data**



Nominal current at 20 °C	1.4 A IEC 60512-5-2:2002-02 (50-pos.)
Test voltage	500 V AC IEC 60512-4-1:2003

**13.2 Air and creepage distances**

Minimum value for clearance and creepage distance	0.4 mm
---	--------

**1714901 FP 1,27/ 80-FV 6,25****14 Current carrying capacity/derating curves**

Specification	IEC 60512-5-2:2002-02
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram

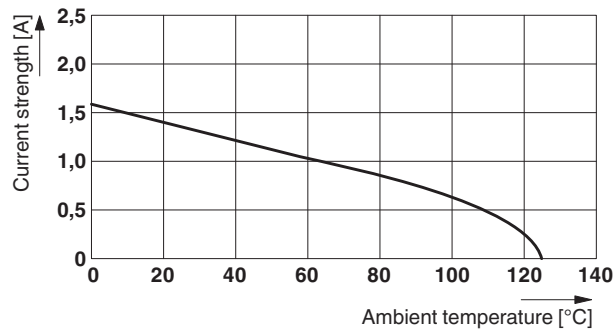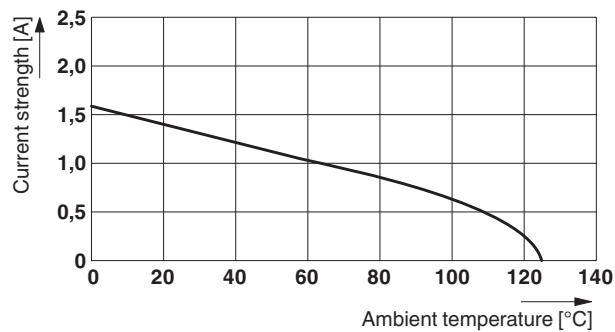**Type: FP 1,27/...-FV 6,25 with FP 1,27/...-MV 1,75****Type: FP 1,27/...-FV 6,25 with FP 1,27/...-MV 3,25****14.1 Insulation resistance**

Insulation resistance	≥ 10 GΩ, (IEC 60512-3-1:2002-02)
-----------------------	----------------------------------

**14.2 forward resistance**

Contact resistance	≤25 mΩ, (IEC 60512-2-1:2002-02)
--------------------	---------------------------------

**14.3 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 2000 - 10 Hz
Sweep speed	1 octave/min
Amplitude	1.5 mm (10 - 60.1 Hz)
Acceleration	20g (60.1 - 2000 Hz)

## 1714901 FP 1,27/ 80-FV 6,25

Test duration per axis 2.5 h

Test directions X-, Y- and Z-axis

Note

## 15 Approvals

cULus Recognized 



**1714901 FP 1,27/ 80-FV 6,25****16 Commercial Data**


Order No.	1714901
Type	FP 1,27/ 80-FV 6,25
Pieces per package	280
Net weight	4.15 g
GTIN	4055626402796
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

## 1714901 FP 1,27/ 80-FV 6,25

## 17 Combination tests



FP 1,27/...-FV 6,25

FP 1,27/...-MV  
1,75FP 1,27/...-MV  
3,25

Mechanical tests				
Insertion/withdrawal force per position	approx. 0.5 N / 0.5 N	approx. 0.5 N / 0.5 N		
Durability tests				
Contact resistance R <sub>1</sub>	25 mΩ	25 mΩ		
Insertion/withdrawal cycles	500	500		
Contact resistance R <sub>2</sub>	25 mΩ	25 mΩ		
Test voltage	500 V AC	500 V AC		
Insulation resistance Requirements > 5 MΩ	10 GΩ			
Thermal tests				
Tested number of positions	50	50		
Test current	1.4 A	1.4 A		