

Datasheet

IP65 LED non-maintained
twin-spot luminaire with
3 hour duration



APPLICATIONS

- Corridors
- Industrial
- Wharehouses

SPECIFICATION


- 2x3W LED, IP65
- 6V 7Ah lead-acid batteries
- Total lumen output 340lm
- "Lamps OK", "Status" and "Charge" indicators
- 3hr non-maintained operation on battery power after mains power failure

CONSTRUCTION

- Polycarbonate IP65 body
- Light weight, only 2.8Kg

795-9766

LED Twin-spot 2x3W fitting - Non-maintained M3

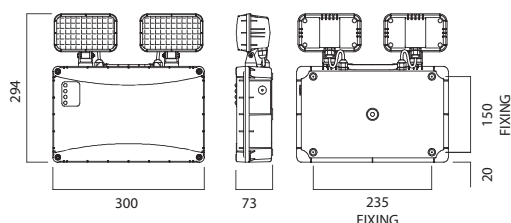

Maintained twin-spot luminaire
with 3 hour duration



APPLICATIONS

- Corridors
- Warehouses
- Industrial premises

SPECIFICATION

- Maintained
- 2 x 20W halogen
- 230V 50Hz
- 3 hours operation on battery power after mains power failure

CONSTRUCTION

- Robust steel body
- White gloss powder

795-9760

Twinspot 2x20W + Batteries 3 Hours

