# C-BCSI 6/18X4,5 - Cable lug

#### 3240533

https://www.phoenixcontact.com/gb/products/3240533



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Flat pin cable lug, yellow, 4 - 6 mm<sup>2</sup>, pin dimensions: 32 x 4.5 mm

### Your advantages

- · Hard-soldered crimping zone for maximum conductor pull-out forces in connection with CRIMPFOX RCI... pliers
- Easy and reliable conductor entry thanks to 'EASY ENTRY'
- · Halogen-free
- · Electrogalvanized

#### Commercial data

| Item number                          | 3240533             |
|--------------------------------------|---------------------|
| Packing unit                         | 50 рс               |
| Minimum order quantity               | 50 pc               |
| Sales key                            | BH3461              |
| Product key                          | BH3461              |
| Catalog page                         | Page 497 (C-3-2019) |
| GTIN                                 | 4046356528030       |
| Weight per piece (including packing) | 1.923 g             |
| Weight per piece (excluding packing) | 1.87 g              |
| Customs tariff number                | 85369010            |
| Country of origin                    | CN                  |

# C-BCSI 6/18X4,5 - Cable lug

3240533

https://www.phoenixcontact.com/gb/products/3240533




## Technical data

#### **Product properties**

| Product type     | Connector                |
|------------------|--------------------------|
| Product property | Halogen-free             |
|                  | With "Easy Entry" system |
|                  | Brazed                   |
|                  | PA-insulated             |

#### Dimensions

| Dimensional | drawing |
|-------------|---------|
|-------------|---------|



| Width                                     | 4.5 mm |
|---|--------|
| Sleeve length                             | 32 mm  |
| Length of the insulating material sleeve  | 14 mm  |
| Length contact range                      | 18 mm  |
| Maximum stripping length                  | 9 mm   |
| Min. material thickness                   | 1 mm   |
| Inner dimensions of the insulating collar | 6.6 mm |

#### Material specifications

| Color                                  | yellow (RAL 1018) |
|--|-------------------|
| Material                               | Cu                |
| Flammability rating according to UL 94 | V2                |
| Coating                                | electrogalvanized |
| Insulating material                    | PA                |
| Components                             | halogen-free      |

#### Mechanical properties

| Technical data |       |
|----------------|-------|
| Sleeve length  | 32 mm |


#### Environmental and real-life conditions

 Ambient conditions

 Ambient temperature (operation)
 -20 °C ... 105 °C

 Permanent temperature
 105 °C

 Short-term temperature
 120 °C





3240533

https://www.phoenixcontact.com/gb/products/3240533


Drawings

Dimensional drawing



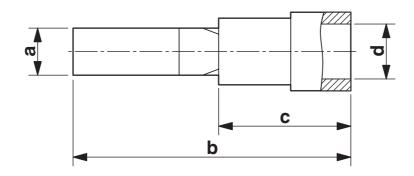

PHŒNIX



3240533


https://www.phoenixcontact.com/gb/products/3240533



## Classifications

#### ECLASS

|        | ECLASS-13.0 | 27400204 |
|--------|-------------|----------|
| Εī     | ГІМ         |          |
|        |             |          |
|        | ETIM 9.0    | EC001052 |
|        |             |          |
| UNSPSC |             |          |
|        | UNSPSC 21.0 | 27121700 |



3240533

https://www.phoenixcontact.com/gb/products/3240533



### Environmental product compliance

#### EU RoHS

| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
|---|--|
| China RoHS                              |  |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|   | No hazardous substances above the limits |
| EU REACH SVHC                           |  |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk