


FASTON Connection System

Housings & Insulation Sleeves for FASTON Receptacles

**6.3 mm (.250 Series)
4.8 mm (.187 Series)
2.8 mm (.110 Series)**

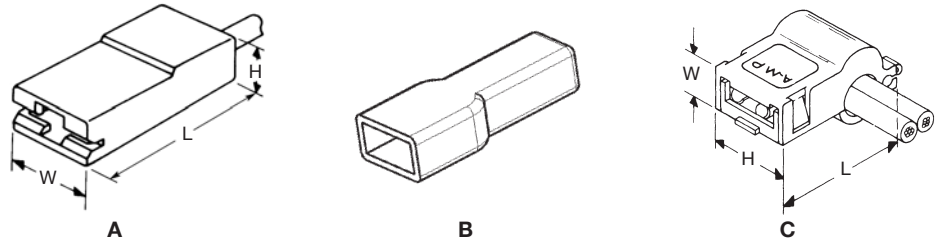

| Style | Size | Material | Colour | UL 94 | Note | Dimensions (mm) | | | Part Number | |
|---------------|---------------------|---------------|----------------|-------------------------|-------------------|-------------------|------------|------------|-------------|------------|
| | | | | | | W | L | H | | |
| A | 2.8 mm | Polyamide | Natural | - | - | 5.0 | 18.0 | 5.0 | 926410-1 | |
| | | Polyamide | Natural | - | - | 5.0 | 20.0 | 5.0 | 925387-1 | |
| | | Polycarbonate | Natural | V0 | - | 5.0 | 20.0 | 5.0 | 925387-2 | |
| | | Polyamide | Natural | V2 | - | 5.8 | 20.0 | 6.1 | 1-480417-0 | |
| | | | Black | V2 | - | 5.8 | 20.0 | 6.1 | 1-480417-1 | |
| | | Polyamide | Natural | V2 | - | 5.8 | 20.8 | 4.8 | 141628-2 | |
| | | | Black | V2 | - | 5.8 | 20.8 | 4.8 | 141628-4 | |
| | | 4.8 mm | Polyamide | Natural | V0 | GWT 750° No Flame | 7.8 | 19.7 | 6.0 | 141628-5 |
| | | | | Natural | V2 | - | 7.8 | 19.7 | 6.0 | 1-480435-0 |
| | | | Polyamide | Natural | V2 | GWT 750° No Flame | 7.1 | 19.9 | 5.5 | 1-480435-5 |
| | | | | Natural | V0 | GWT 750° No Flame | 7.1 | 19.9 | 5.5 | 2-880488-2 |
| | | | Polyamide | Natural | V2 | - | 9.0 | 25.3 | 6.4 | 280232-0 |
| | Red | | | V2 | - | 9.0 | 25.3 | 6.4 | 280232-1 | |
| | Polyamide | | Black | V2 | - | 9.0 | 25.3 | 6.4 | 280232-5 | |
| | | | Natural | V0 | - | 9.0 | 25.3 | 6.4 | 280232-6 | |
| | Polyamide | | Natural | V2 | GWT 750° No Flame | 9.0 | 24.4 | 5.3 | 280232-8 | |
| | | | Natural | V0 | GWT 750° No Flame | 9.0 | 24.4 | 5.3 | 8-735075-0 | |
| | 6.3 mm | | Polyamide | Natural | V2 | GWT 750° No Flame | 9.1 | 24.7 | 4.7 | 969518-2 |
| | | | | Natural | V2 | - | 9.1 | 24.7 | 4.7 | 969518-3 |
| | | Polyamide | Natural | V2 | - | 9.3 | 24.4 | 5.3 | 336369-1 | |
| | | | Black | V2 | - | 9.3 | 24.4 | 5.3 | 336369-5 | |
| | | Polyamide | Natural | V0 | - | 9.3 | 24.4 | 5.3 | 3-336369-1 | |
| | | | Black | V0 | - | 9.3 | 24.4 | 5.3 | 3-336369-5 | |
| | | Polyamide | Natural | V2 | - | 9.2 | 24.4 | 6.0 | 926539-1 | |
| | | | Red | V2 | - | 9.2 | 24.4 | 6.0 | 926539-2 | |
| | | Polyamide | Black | V2 | - | 9.2 | 24.4 | 6.0 | 926539-3 | |
| | | | Brown | V2 | - | 9.2 | 24.4 | 6.0 | 926539-7 | |
| | | Polyamide | Natural | V2 | 140° Max Temp. | 9.2 | 24.4 | 6.0 | 1-926539-6 | |
| Natural | | | V2 | 170° Max Temp. | 9.2 | 24.4 | 6.0 | 1-926539-7 | | |
| PBT | Black | V0 | 140° Max Temp. | 9.2 | 24.4 | 6.0 | 926539-5 | | | |
| Polyamide | Natural | V2 | - | 8.9 | 25.4 | - | 280233-0 | | | |
| 2.8mm | Polyethylene | Natural | - | - | 5.2 | 18.5 | 3.2 | 735052-0 | | |
| 4.8mm | Soft Vinyl Chloride | - | - | - | 5.8 | 20.0 | 2.2 | 1-170823-4 | | |
| B | 6.3 mm | Polyamide | Natural | - | - | 9.0 | 22.8 | 5.0 | 2-180930-0 | |
| | | | Black | - | - | 9.0 | 22.5 | 5.0 | 2-180930-5 | |
| | | | Natural | V2 | GWT 750° No Flame | 9.0 | 22.5 | 5.0 | 3-180930-0 | |
| | 6.3 mm | Polyamide | Natural | - | - | 9.0 | 22.8 | 5.0 | 180460-0 | |
| | | | Natural | - | - | 9.0 | 21.6 | 5.0 | 1-925017-0 | |
| | | | Black | - | - | 9.0 | 21.6 | 5.0 | 1-925017-5 | |
| Polypropylene | Natural | - | - | 9.0 | 21.6 | 5.0 | 3-925017-0 | | | |
| 4.8 mm | Polyamide | Natural | V2 | for Tab-Lok Flag FASTON | 5.8 | 10.9 | 8.1 | 1-480487-2 | | |
| C | 6.3 mm | Polyamide | Natural | V2 | - | 5.6 | 18.5 | 14.2 | 180984-0 | |
| | | | Red | V2 | - | 5.6 | 18.5 | 14.2 | 180984-1 | |
| | | | Black | V2 | - | 5.6 | 18.5 | 14.2 | 180984-5 | |
| | | | Natural | V0 | - | 5.6 | 18.5 | 14.2 | 8-180984-0 | |
| | | | Black | V0 | - | 5.6 | 18.5 | 14.2 | 8-180984-1 | |
| | | | Natural | V2 | GWT 750° No Flame | 5.6 | 18.5 | 14.2 | 8-180984-2 | |