

## General Description

The AS1113 is a single-chip, highly integrated CMOS solution for Power over Ethernet (PoE). Applications such as Voice over IP (VoIP) Phones, Wireless LAN Access Point, Security and Web Cameras, Analog Telephone Adapters (ATA) and Point of Sales Terminals.

The AS1113 provides the functions required for power over Ethernet Powered Device (PD) applications.

The AS1113 integrates rectification and protection circuitry, a PD controller, and a DC-DC converter. This high level of integration provides faster response to surge events and limits stray surge current from passing through sensitive circuits, such as the Ethernet PHY device. The device is designed to provide a safe low impedance discharge paths directly back to the earth ground, resulting in superior reliability and circuit protection.

AS1113 has been architected and designed to address both EMI emission concerns and surge/over-voltage protection in PoE applications. The device implements many design features that minimizes transmission of system common-mode noise on to the UTP cable, while providing high immunity to over-voltage and surge events.

By using high-volume standard CMOS technology, Akros enables its customers to implement higher performance PoE devices with low cost and a small footprint

## Example Application Diagram

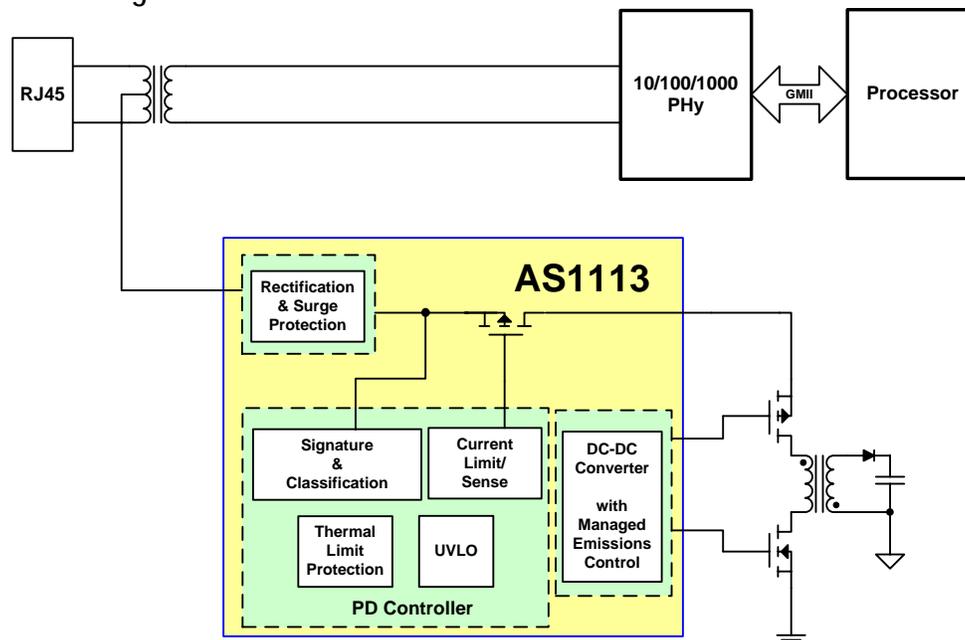


Figure 1: Typical Application Diagram for Gigabit Ethernet based PD (Flyback converter)


## Features

The AS1113 is fully integrated and architected at a system level to provide the following features:

- Fully supports *IEEE*<sup>®</sup> Std. 802.3af-2003
- Meets IEC 61000-4-2/3/4/5/6 requirements for electric discharge
- Meets IEC 60950 overvoltage protection requirements
- Integrated rectification for superior high voltage protection
- Integrated DC-DC converter provides exceptional EMI performance
- Provides seamless support for local power
- Over temperature protection
- 5x5 m QFN Package, RoHS Compliant

## Typical Applications

- Voice over IP (VoIP) phones
- Wireless LAN Access Points
- Pan, Tilt and Zoom, security and Web Cameras
- Analog Telephone Adapters (ATA)
- Point of Sale (PoS) Terminals

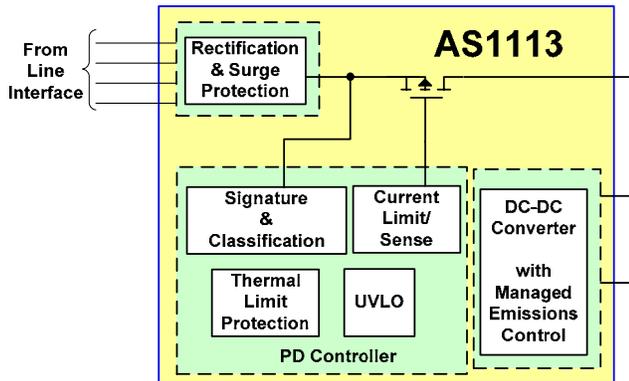

**Figure 1: Top-Level Block Diagram of the AS1113**

### Description

The AS1113 is a fully integrated PD that provides functions required for Power over Ethernet (PoE) applications as defined by IEEE®802.3af over 2 pairs of CAT5e/6 cables. The optimized architecture of the AS1113 reduces external component cost in a small footprint package while providing high performance. The AS1113 provides:

### PD Control

The AS1113 PD Control interface is designed to provide a fully compliant IEEE 802.3af PD system, with programmable support for the standard PD control functions. The PD Control provides the following major functions:

- Signals that it is a PD
- Determines the mode of operation of the AS1113, based on the IEEE 802.3af standard.
- Manages power and thermal protection overrides.

### Modes of Operation

The AS1113 has four modes of operation:

1. Signature Detection - The PD signature is detected by the AS1113 to allow classification.
2. Classification - The PD signature is classified, to determine the power requirements of the PD.
3. Normal Operation - The PD is supplied the proper power by the AS1113.
4. Disable - PSE voltage is below normal and the power to the PD is off.

As the supply voltage from the PSE increases from initial 0V, the part transitions through the modes of operation in this sequence:

If no PSE is present, the AS1113 remains in the disable mode and does not affect the Ethernet link.

### PD Control Power and Thermal Protections

The AS1113 provides the following features for PD Control Power and Thermal protection:

- Under Voltage Lockout (UVLO)—The UVLO circuitry detects conditions when the voltage is too low, and

Disable ⇨ Signature Detection ⇨ Classification ⇨ Normal Operation

disconnects the power to protect the PD.

- Current Limit/Current Sense—senses the operating current via the sense resistor and regulates the gate voltage on the on-chip power MOSFET to minimize on-chip Power dissipation.
- Thermal Limit/Protection—the AS1113 provides thermal protection for the IC by monitoring die temperatures and reducing current, or disconnecting power as appropriate.

### DC-DC Conversion

The integrated DC-DC converter operates from a switched input voltage and includes soft-start and current limiting. After the input power and enable signals are asserted, the DC-DC controller starts up. The converter provides control signals to external MOSFET switches and uses an external sense resistor to sense the transformer primary current.

As part of full system level solution for EMI, Akros has focused significant effort in reducing switching noise in the integrated power converters through unique techniques of balancing the signaling of the FET drivers and reducing ground bounce by minimizing the dV/dt switching noise.

The DC-DC architecture is a current mode converter which can be configured with external component changes for either flyback, forward or buck topologies. Both non-isolated and isolated switching technologies are supported. The PWM switching signal is controlled for low radiated and conducted emissions.

### For More Information

Contact us at [marcom@akrossilicon.com](mailto:marcom@akrossilicon.com), or  
**Akros Silicon**, 275 Turn Pike Drive, Folsom, CA 95630