


# Eaton 053493

Catalog Number: 053493

Eaton xEffect K-Type Terminal Enclosures Switch- & Controlgear Enclosure. Connection terminal, 1000A, 5p, flat/round, 240

General specifications

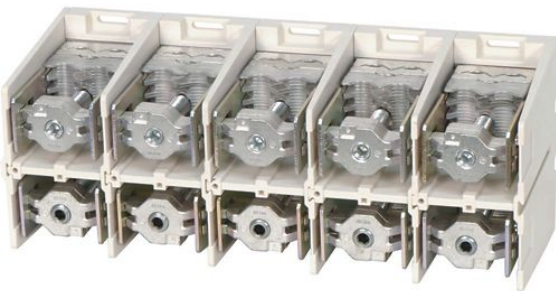

Product Name

Eaton xEffect K-Type Terminal Enclosures Switch- & Controlgear Enclosure

Catalog Number

053493  
  
EAN  
4015080534938

Product Length/Depth

150 mm

Product Height

165 mm

Product Width

416 mm

Product Weight

21.752 kg

Compliances

RoHS conform

## Product specifications

### Used with

General switchboard accessory  
Accessory panel building

### Special features

Conversion kits for strip terminal in cable connection available separately  
Terminal covers available separately  
Including labels for terminal marking U, V, W - X, Y, Z - L1, L2, L3 - T1, T2, T3 - PE, N, PEN, protective earth (ground) symbol  
Relationship of rated operational current -terminal capacity to IEC/EN 60439, VDE 0660 Part 500 or EN 50021  
Outer terminal for round or sectoral conductor, other side for Cu strip

### Type

Accessory panel building  
General switchboard accessory

### Features

Contact safe

### Accessory/spare part type

Terminations  
Terminals, 160 – 1000 A

### Connection type

Clamp  
Screwing

### Number of poles

Five-pole

### Rated operation current (Ie)

1000 A

## Resources

### Catalogs

[eaton-panel-building-accessories-catalog-ca008008en-en-us.pdf](#)

### Declarations of conformity

[eaton-xeffect-k-type-terminals-declaration-of-conformity-en-us.pdf](#)

### Drawings

[eaton-control-panels-terminals-xeffect-k-type-terminal-3d-drawing.eps](#)

### Installation instructions

[IL015110ZU](#)

### mCAD model

[eaton-K3X240\\_5-drawing.dwg](#)

[eaton-K3X240\\_5-3d-model.stp](#)

### System overview

[eaton-control-panels-terminals-xeffect-k-type-terminal-explosion-drawing-002.eps](#)

#### Mounting method

Screw

#### Suitable for

Useful for stranded conductors

#### Terminal capacity (copper band)

40 mm x 1 mm (10x) for flat strip

50 mm x 1 mm (10x) for flat strip

2 segments of 21 mm x 1 mm (11x) for flat strip

#### Nominal current

1000 A

#### Number of connections (Less Than 6 mm squared)

0

#### Number of connections (Less Than AWG 6)

0

#### Number of connections (Greater Than 25 mm squared)

10

#### Number of connections (Greater Than 250 kcmil)

0

#### Number of connections (10 mm squared)

0

#### Number of connections (16 mm squared)

0

#### Number of connections (25 mm squared)

0

#### Number of connections (250 kcmil)

0

#### Number of connections (AWG 2)

0

#### Number of connections (AWG 4)

0

#### Number of connections (AWG 4/0)

0

#### Number of connections (AWG 6)

0

#### Number of connections (total)

10

#### Rated insulation voltage (Ui)

1000 VAC

Number of outputs

3

Terminal capacity (aluminum cable)

150 mm<sup>2</sup> - 185 mm<sup>2</sup> (3x)

150 mm<sup>2</sup> - 240 mm<sup>2</sup> (2x)

Terminal capacity (conductor)

60 mm x 15 mm

Terminal capacity (copper/aluminum cable)

50 mm<sup>2</sup> - 240 mm<sup>2</sup> (3x)

150 mm<sup>2</sup> - 300 mm<sup>2</sup> (2x)

Conductor cross section, input - max

240 mm<sup>2</sup>

Conductor cross section, output - min

50 mm<sup>2</sup>

Conductor cross section, input - min

50 mm<sup>2</sup>

Conductor cross section, input AWG - min

1 mm<sup>2</sup>

Conductor cross section, input AWG - max

500 mm<sup>2</sup>

Conductor cross section, output - max

300 mm<sup>2</sup>

Conductor cross section, output AWG - max

0 mm<sup>2</sup>

Conductor cross section, output AWG - min

0 mm<sup>2</sup>

Number of inputs

2



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are  
property of their respective  
owners.



[Eaton.com/socialmedia](https://Eaton.com/socialmedia)