


# DX2052



## Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/PNP OUT/DC

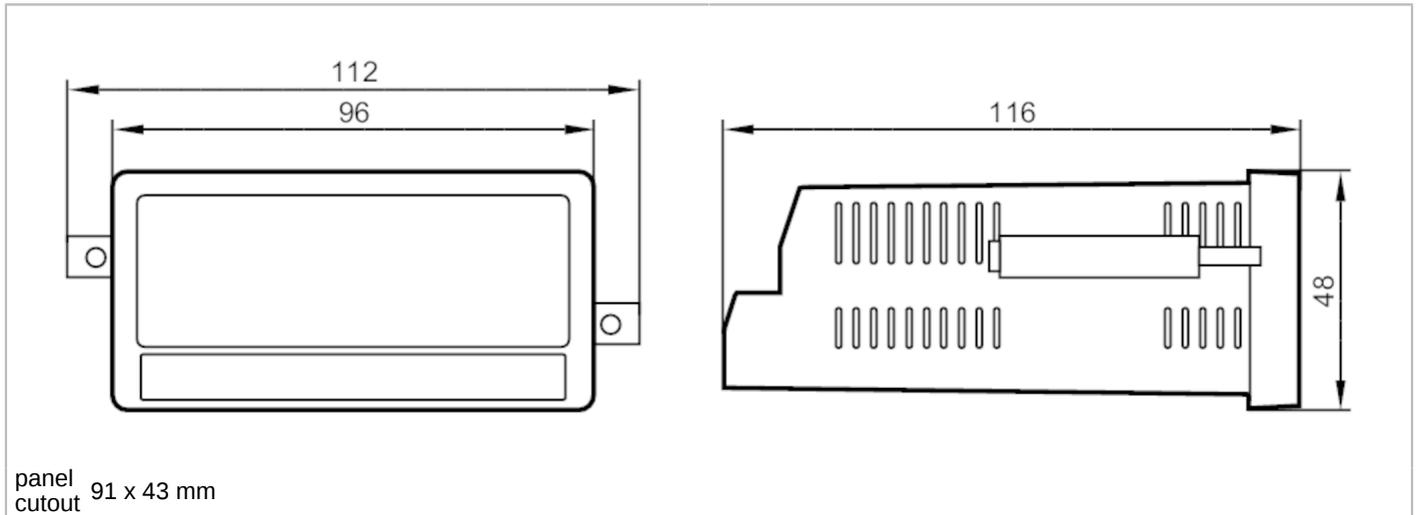

panel cutout 91 x 43 mm



Product characteristics	
Housing	housing for panel mounting
Dimensions [mm]	48 x 112 x 116
Application	
Application	displaying and monitoring analogue signals; e.g. pressure sensors, temperature sensors or flow sensors
Electrical data	
Operating voltage [V]	18...30 DC
Current consumption [mA]	100
Inputs / outputs	
Number of inputs and outputs	Number of analogue inputs: 2; Number of digital outputs: 4
Inputs	
Number of analogue inputs	2; (Spannungs- oder Stromeingang)
Analogue input (current) [mA]	0...20
Analogue input (voltage) [V]	-10...10
Resolution of analogue input	16 bit
Precision analogue input [%]	0,1
Outputs	
Number of digital outputs	4
Overload protection	yes
Operating conditions	
Ambient temperature [°C]	-20...60
Storage temperature [°C]	-25...70
Protection	IP 65
Protection rating terminals	IP 20

# DX2052



## Multifunction display for monitoring analogue standard signals

DISPLAY/AX460/PNP OUT/DC

### Tests / approvals

EMC	EN 61000-6-2	
	EN 61000-6-3	
	EN 61000-6-4	

### Mechanical data

Weight	[g]	299.5
Housing		housing for panel mounting
Type of mounting		installation in panels or panel cutouts; (panel cutout: 91 x 43 mm)
Dimensions	[mm]	48 x 112 x 116
Materials		Noryl UL94-V-0


### Displays / operating elements

Display	colour display	full graphic LCD display, touch screen
---------	----------------	--

### Electrical connection

screw terminals:

#### Connection

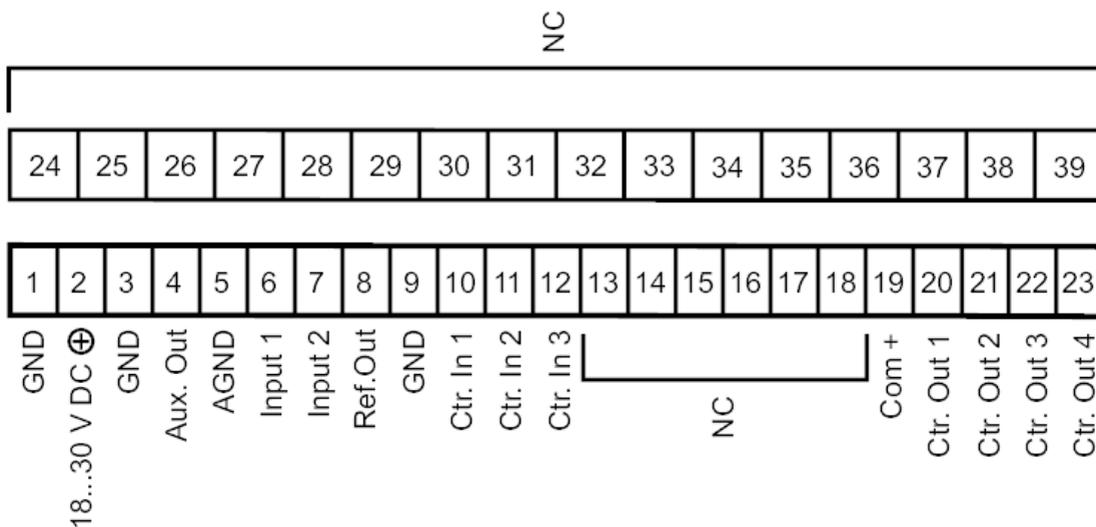

NC not used