



Datasheet

200/100 MHz Mixed-domain Oscilloscope

Stock number :	180-4804	RSMDO-2204EX	180-4802	RSMDO-2104EX
	180-4803	RSMDO-2202EX	180-4801	RSMDO-2102EX
	180-4800	RSMDO-2204EG	180-4798	RSMDO-2104EG
	180-4799	RSMDO-2202EG	180-4797	RSMDO-2102EG

EN



FEATURES


- 200/100 Bandwidth Selections: 2 or 4 Channels
- Real Time Sample Rate Per Channel: 1GSa/s (2 Channel Models); Maximum Real Time Sample Rate: 1 GSa/s (4 Channel Models)
- RSMDO-2000EG Equips with a Spectrum Analyzer and a Dual Channel 25 MHz AWG
- RSMDO-2000EX Equips with a Spectrum Analyzer ; a Dual Channel 25 MHz AWG; DMM and Power Supply
- Per Channel 10M Memory Depth and VPO Waveform Display Technology Waveform
- Update Rate up to 120,000 wfm/s
- 8 " WVGA TFT LCD
- Free Frequency Response Analyzer Software
- Maximum 1M FFT Provides Higher Frequency Domain Resolution Measurements
- High Pass, Low Pass and Band Pass Filter Functions
- 29,000 Segmented Memory Sections and Waveform Search Functions
- I²C/SPI/UART/CAN/LIN Serial Bus Trigger and Decoding Functions
- Data Log Function is Able to Track Signal Changes up to 1000 Hours
- Mask Test Function & Network Storage Function

One Oscilloscope ,Two Domains

RSMDO-2000E series is multi-functional mixed domain oscilloscope. The series includes two feature combinations : RSMDO-2000EG and RSMDO-2000EX. MDO-2000EG models have a built-in spectrum analyzer and a dual channel 25MHz arbitrary waveform generator and RSMDO-2000EX models feature a built-in a spectrum analyzer, arbitrary waveform generator, a 5,000 count DMM, and a 5V/1A power supply. The first of its kind, RSMDO-2000EX is the only oscilloscope to equip with a DMM and a power supply in the T&M industry.

While entering the spectrum mode, RSMDO-2000E series will display a full screen of frequency domain. Users can input Center frequency, Span, Start frequency, and Stop frequency based upon test requirements so as to rapidly and intuitively observe required frequency range that allows users to experience the user interface of a real spectrum analyzer. While observing frequency domain display, engineers can observe waveform characteristics, which are not easily to be seen from time domain waveforms, for instance, the harmonic composition of a waveform and the frequency characteristics of a modulation signal. Compared with oscilloscope' FFT, RSMDO-2000E series allows engineers to effectively conduct signal measurements on frequency domain.

Conventional DSO's FFT always calculates the entire signal bandwidth up to half the sampling rate (Fs). However, the insufficient calculation capability can't conduct FFT calculation with more points. Users can't have the signal's detailed frequency information due to the insufficient frequency resolution from the calculation result. Whereas RSMDO-2000E series analyzes signal spectrum of interest. Compared with oscilloscope' FFT, RSMDO-2000E series allows engineers to effectively conduct signal measurements on frequency domain. Right illustration shown the conventional DSO's FFT (above figure) VS. RSMDO-2000E's Spectrum analyzer (below figure).

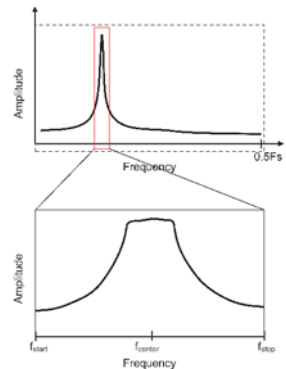

RSMDO-2000E series frequency domain also includes Spectrum Trace Type settings (Normal, Max-hold, Min-hold, and Average) (Figure 1). Users can freely select various Spectrum Traces for simultaneous display. Detection method (Sample, +Peak, -Peak, and Average) (Figure 2) can be individually set for each Trace. Additionally, users, via Cursor, can manually mark the corresponding positions to reflect Frequency and Amplitude. The Search function can also be applied to log spectrum's Peak Table. Amplitude is displayed with dB and Marker can obtain measurement data. Users can use the Search function to search and mark the amplitude and frequency of spectrum signal. Search methods include Max. peak and threshold. Measurement results can be displayed and saved.(Figure 3)



Figure 1



Figure 2





Figure 3

Compared with the general spectrum analyzer, the spectrum function of RSMDO-2000E series can test below~9 kHz signals, which is applicable to the frequency domain analysis of audio frequency and vibration. RSMDO-2000E series can also test the frequency domain signal with DC component without damaging the instrument. With respect to frequency domain waveform display, RSMDO-2000E series, featuring the same capability of a real-time spectrum analyzer, is faster than the general spectrum analyzer. Why? It is because RSMDO-2000E series utilizes digital circuit and software to calculate FFT. The general spectrum analyzer can only process the signal of a narrow frequency bandwidth at a time by frequency sweeping. Each sweeping will take several ms to dozens of ms. Hundreds and thousands of frequency sweepings are gathered to form a spectrum. Therefore, the displayed spectrum is not obtained at the same time. RSMDO-2000E series obtains spectrum display at the same time by utilizing digital circuit and software to calculate FFT that is faster than the frequency sweeping method. The FFT settings of oscilloscopes are based upon horizontal scale (sample rate) setting, which is totally different from the frequency range setting of RSMDO-2000E series. Most instruments will have insufficient frequency resolution due to insufficient FFT points while conducting spectrum measurement by FFT. Compared with the FFT of oscilloscopes, RSMDO-2000E series satisfies users with signal measurement requirements under 9 kHz; a better setting interface, measurement resolution and measurements speed.

Three screen displays on the right show the spectrum results of RSMDO-2000E's spectrum analyzer and the FFT of two different branded oscilloscopes after testing the same FSK signal. The parameters of FSK signal: 500 mVpp sine wave, fmax: 10.2 MHz, fmin: 10.0 MHz, bit rate: 10.0 kHz. The upper right screen display is the spectrum of RSMDO-2000E's spectrum analyzer. Users can directly input Center and Span Frequency by an intuitive and swift setting. Fmax and fmin can be clearly identified from the screen display.



The right screen display is an often seen spectrum from a general oscilloscope's FFT. The left boundary started from DC (low frequency signal) and the maximum frequency on the right is half of the sample rate (can be extended to the right or even out of the boundary). The Span setting for spectrum can only be switched by fixed 1-2-5 multiplying factors. Therefore, users can't set Span according to their requirements that is extremely inconvenient for the operation. In fact, switching multiplying factor is to conduct Zoom In/Out calculation on the original FFT spectrum and the sample rate remains the same during the calculation process. Users can easily encounter the upper and lower boundary limits that is totally different from the general spectrum analyzer in terms of operational experience. Most importantly, no matter how setting is changed the important fmax and fmin of spectrum can't be identified.

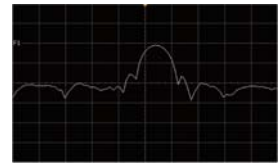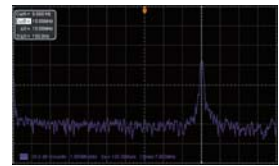


The right screen display is the FFT spectrum from a well-known oscilloscope manufacturer. It also provides Span setting (adjustable 1-2-5 multiplying factor) but the result is the same as the previous case, which only conducts Zoom In/Out calculation on FFT spectrum and FFT calculation points have not increased. This method is absolutely unhelpful on increasing frequency resolution. Therefore, its fmax and fmin can't be identified as well.

Users will see fmax and fmin appearing on the screen alternatively if the conventional swept tuned spectrum analyzer is used to conduct the measurement on the previous signal. The reason is that each frequency component is not obtained at the same time frame and it will take a longer time to process.



FRA of RC high-pass filter

RSMDO-2000E also provide the frequency response analysis function (Bode plot). The FRA software can be directly downloaded from GW Instek website. Via arbitrary waveform generator, oscilloscope, and FRA software, users can obtain DUT's FRA characteristic curve plot. FRA has a very wide application range, including product circuit and component performance verification and analysis such as Feedback of Circuit Design, Filter Design, Amplifier Design, Resonant Circuit Design, Cable Frequency Response, and Signal Transformer Performance. Via FRA, users can preliminarily verify product and analyze component's characteristics without the expensive instrument.

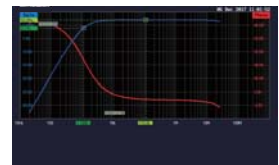

Cursor measurement for the determination at 3dB cut-off frequency of the high-pass filter.

The frequency range of FRA is from 20 Hz to 25 MHz; the number of test point can be selected from 10 to 90 points per decade. After completing the Bode plot, users can select measurement curve by Cursor so as to retrieve each point's amplitude and phase on the curve.

Other than the new functionalities, the hardware characteristics of RSMDO-2000EG and RSMDO-2000EX are identical to those of RSGDS-2000E Series. RSMDO-2000EG and RSMDO-2000EX are equipped with 8-inch display and feature bandwidth selections of 200 MHz, 100MHz, and 70MHz. Models with two analog channels provide 1GSa/s real-time sampling rate per channel; models with four analog channels provide 1GSa/s maximum real-time sampling rate. The waveform update rate of 120,000 wfm/s and the minimum 1mV/div vertical range allow RSMDO-2000EG series RSMDO-2000EX to measure complex feeble signals and clearly display measurement results. With respect to the memory depth, RSMDO-2000E series provide 10M long memory for users to completely retrieve and analyze waveforms. Users, based upon the application requirements, can select 1 k, 10 k, 100 k, 1 M or 10 M memory depth. The segmented memory can be divided the maximum into 29,000 sections for users to bypass any unimportant waveforms so as to swiftly search all required waveforms. With the function, more meaningful waveforms can be saved and target waveforms can be displayed rapidly. With the waveform search function, users can rapidly search desired waveforms according to the required trigger conditions. RSMDO-2000E series also provides 1M FFT display that allows users to correctly and efficiently acquire measurement results of the frequency domain. RSMDO-2000E series, enhancing by the high waveform update rate of 120,000 wfm/sec, Window Zoom and Peak Search, becomes the optimal choice of the economical and multi-function mixed domain oscilloscope.

SPECIFICATIONS

		RSMDO-2102E(G/X)	RSMDO-2104E(G/X)	RSMDO-2202E(G/X)	RSMDO-2204E(G/X)
VERTICAL SENSITIVITY	Channels	2Ch+EXT	4Ch	2Ch+EXT	4Ch
	Bandwidth Rise Time Bandwidth Limit	DC~100 MHz(-3dB) 3.5 ns 20 MHz		DC~200 MHz(-3dB) 1.75 ns 20M/100 MHz	
	Vertical Resolution Input Coupling Input Impedance DC Gain Accuracy Polarity Maximum Input Voltage Offset Position Range Waveform Signal Process	8 bits : 1mV ~ 10V/div AC, DC, GND 1MΩ // 16pF approx. ±(3% when 2mV/div or greater is selected ; ±(5%) when 1mV/div is selected Normal & Invert 300Vrms , CAT I 1mV/div ~ 20mV/div : ±0.5V ; 50mV/div ~ 200mV/div : ±5V ; 500mV/div ~ 2V/div : ±25V ; 5V/div~10V/div : ±250V + , - , × , ÷ , FFT , User Defined Expression FFT : 1Mpts ; FFT : Spectral magnitude. Set FFT Vertical Scale to Linear RMS or dBV RMS and FFT Window to Rectangular, Hamming , Hanning, or Blackman			
TRIGGER	Source Trigger Mode Trigger Type Trigger Holdoff Range Coupling Sensitivity	Ch1 ,CH2, CH3, CH4, Line, EXT* ; *dual channel models only Auto (Supports Roll Mode for 100 ms/div and slower), Normal, Single Sequence Edge, Pulse Width(Glitch), Video, Pulse Runt, Rise & Fall(Slope), Alternate, Time out, Event-Delay(1~65,535 events),Time-Delay(Duration;4ns~10s), Bus 4ns ~ 10s AC, DC, LF rej. , Hf rej. , Noise rej. 1div			
EXT TRIGGER	Range Sensitivity Input Impedance	±15V DC ~ 100 MHz Approx. 100 mV; 100 MHz ~ 200 MHz Approx. 150 mV 1 MΩ±3%, ~16 pF			
HORIZONTAL	Time Base Range Pre-trigger Post-trigger Time Base Accuracy Real Time Sample Rate Record Length Acquisition Mode Peak Detection Average	1ns/div ~ 100s/div (1-2-5 increments); ROLL : 100ms/div ~ 100s/div 10 div maximum 2,000,000 div maximum ±50 ppm over any ≥ 1 ms time interval Max. : 1GSa/s (4ch model); Per channel 1GSa/s (2ch model) 10 Mpts/CH Normal, Average, Peak Detect, Single 2 ns (typical) Selectable from 2 to 256			



SPECIFICATIONS

X-Y MODE	X-Axis Input Y-Axis Input Phase Shift	Channel 1 ; Channel 3* (* : four channel models only) Channel 2 ; Channel 4* (* : four channel models only) ±3° at 100 kHz
Cursors AND MEASUREMENT	Cursors Automatic Measurement	Amplitude, Time, Gating Available; Unit : Seconds(S), Hz(1/S), Phase (Degrees), Ratio(%) 38 sets : Pk-Pk, Max, Min, Amplitude, High, Low, Mean, Cycle Mean, RMS, Cycle RMS, Area, Cycle Area, ROVShoot, FOVShoot, RPRESshoot, FPREShoot, Frequency, Period, RiseTime, FallTime, +Width, -Width, Duty Cycle, +Pulses, -Pulses, +Edges, -Edges, %Flicker, Flicker Idx., FRR, FRF, FFR, FFF, LRR, LRF, LFR, LFF, Phase
CONTROL PANEL FUNCTION	Auto Counter Autoset Save Setup Save Waveform	6 digits, range from 2 Hz minimum to the rated bandwidth Single-button, automatic setup of all channels for vertical, horizontal and trigger systems, with undo Autoset 20 sets 24 sets
DISPLAY SYSTEM	TFT LCD Type Display Resolution Interpolation Waveform Display Waveform Update Rate Display mode Display Graticule	8" TFT LCD WVGA color display 800 horizontal x 480 vertical pixels (WVGA) Sin(x)/x Dots, Vectors, Variable persistence(16 ms-4 s), Infinite persistence 120,000 waveforms per second, maximum YT ; XY 8 x 10 divisions
INTERFACE	USB Port Ethernet Port (LAN) Go/NoGo BNC Kensington Style Lock	USB 2.0 High-speed host port x 1, USB 2.0 High-speed device port x 1 RJ-45 connector, 10/100Mbps with HP Auto-MDIX 5V Max/10mA TTL open collector output Rear-panel security slot connects to standard Kensington-style lock
SPECTRUM ANALYZER SPECIFICATIONS	Frequency Range Span Resolution Bandwidth Reference Level Vertical Units Vertical Position Vertical Scale Display Average Noise Level Spurious Response Frequency Domain Trace Types Detection Methods FFT Windows	DC-500 MHz(Max.) (Max. bandwidth ~500 MHz uncalibrated) 1 kHz - 500M Hz(Max.) 1 Hz - 500 kHz(Max.) -50 dBm to +40dBm in steps of 5dBm dBV RMS; Linear RMS; dBm -12divs to +12divs 1dB/div to 20dB/div in a 1-2-5 Sequence 1V/div < -50dBm, Avg : 16 ; 100mV/div < -70dBm, Avg : 16 ; 10mV/div < -90dBm, Avg : 16 2nd harmonic distortion< 40dBc ; 3rd harmonic distortion< 45dBc Normal ; Max Hold ; Min Hold ; Average (2 - 256) Sample ; +Peak ; -Peak ; Average FFT Factor : Hanning 1.44 ; Rectangular 0.89 ; Hamming 1.30 ; Blackman 1.68
AWG SPECIFICATIONS	Channels Sample Rate Vertical Resolution Max. Frequency Waveforms Output Range Output Resolution Output Accuracy Offset Range Offset Resolution Sine Square/Pulse Ramp	2 200 Msa/s 14 bits 25 MHz Sine, Square, Pulse, Ramp, DC, Noise, Sinc, Gaston, Lorentz, Exponential Rise, Exponential Fall, Haversine, Cardiac 20 mVpp to 5 Vpp, HighZ;10 mVpp to 2.5 Vpp, 50 Ω 1 mV 2% (1 kHz) ±2.5 V, HighZ;±1.25 V, 50 Ω 1mV Frequency Range:100mHz-25MHz ; Flatness:±0.5 dB (relative to 1kHz) ; Harmonic Distortion:-40 dBc ; Stray (Non-harmonic):-40 dBc ; Total Harmonic Distortion:1% ; S/N Ratio:40 dB Frequency Range:100mHz-15MHz ; Rise/Fall time:<15ns ; Overshoot:<3% ; Duty cycle Square:50% & Pulse:0.4%-99.6% ; Min. Pulse Width:30 ns ; Jitter:500 ps Frequency Range:100mHz-1MHz ; Linearity: 1% ; Symmetry: 0-100%
FREQUENCY RESPONSE ANALYSIS	Dynamic Range Input and Output Sources Frequency Range Number of Test Points Test Amplitude Test Results Manual Measurements Plot Scaling	> 80 dB (typical) Channel 1 or 2 (3 or 4 for four channel model) 20 Hz to 25 MHz 10 to 90 points per decade 20 mVpp to 5 Vpp into High-Z Fixed amplitude across entire sweep Logarithmic overlaid gain and phase plot Two pairs of tracking gain and phase markers Auto-scaled during test
DMM SPECIFICATIONS (RSMDO-2000EX only)	Digit Level DC Voltage Accuracy Input Impedance DC Current Accuracy AC Voltage Accuracy AC Current Accuracy Resistance Accuracy	5,000 counts ; CAT II 600Vrms, CAT III 300Vrms 50mV, 500mV, 5V, 50V, 500V, 1000V 6 ranges 50mV, 500mV, 5V, 50V, 500V, 1000V ±(0.1% reading + 5 digits) 10MΩ 50mA, 500mA, 10A 3 ranges 50mA-500mA (0.5% reading+0.05mA), 10A ±(0.5% reading + 50mA) 50mV, 500mV, 5V, 50V, 700V 5 ranges 50mV, 500mV, 5V, 50V, 700V ±(1.5% reading + 15 digits) at 50Hz-1kHz * Amplitude greater than 0.2% of the full scale reading. 50mA, 500mA, 10A 3 ranges 50mA, 500mA, ±(1.5% reading + 0.05mA) at 50Hz-1kHz ; 10A ±(3% reading + 50mA) at 50Hz-1kHz * Measure range: >10mA 500 Ω, 5k Ω, 50k Ω, 500k Ω, 5M Ω, 5 ranges 500 Ω, 5k Ω, 50k Ω, 500k Ω ±(0.3% reading + 3 digits) ; 5M Ω ±(0.5% reading + 5 digits)
POWER SUPPLY SOECIFICATIONS (RSMDO-2000EX only)	Output Channel Output Voltage Range Output Current (Max.) Voltage Step Output Voltage Accuracy Ripple and Noise	CH1 & CH2 1.0 V-5.0 V 1A 0.1V Continuously Adjustable ±3% 50mVrms
POWER SOURCE MISCELLANEOUS	Line Voltage Range Multi-Language Menu On-Line Help Time Clock Operation Environment	AC 100 V - 240 V, 48 Hz - 63 Hz, auto selection Available Available Time and date, provide the date/time for saved data Temperature: 0°C to 50°C. Relative Humidity: ≤80% at 40°C or below; ≤ 45%, 41°C - 50°C
DIMENSIONS & WEIGHT	384 (W) X 208 (H) X 127.3 (D)mm, Approx. 3 kg	

Note : Three-year warranty, excluding probes & LCD display panel.

Specifications subject to change without notice.

ORDERING INFORMATION

RSMDO-2204E(G/X) 200MHz,4Channel,Digital Storage Oscilloscope,Spectrum analyzer,dual channel 25MHz AWG
RSMDO-2202E(G/X) 200MHz,2Channel,Digital Storage Oscilloscope,Spectrum analyzer,dual channel 25MHz AWG
RSMDO-2104E(G/X) 100MHz,4Channel,Digital Storage Oscilloscope,Spectrum analyzer,dual channel 25MHz AWG
RSMDO-2102E(G/X) 100MHz,2Channel,Digital Storage Oscilloscope,Spectrum analyzer,dual channel 25MHz AWG

"(X)" built in 5,000 counts DMM and power supply

ACCESSORIES

Quick start guide,User manual CD x 1,Power cord x 1, **GTL-110** BNC-BNC cable x 2,**GTL-105A** Alligator Clip test lead (only on RSMDO-2000EX), **GTL-207A** Banana plug test lead (only on RSMDO-2000EX)

GTP-100B-4 : 100MHz(10:1:1:1)Switchable passive probe for RSMDO-2102E(X)/2104E(X)(one per channel)

GTP-200B-4 : 200MHz(10:1:1:1)Switchable passive probe for RSMDO-2202E(X)/2204E(X)(one per channel)

OPTIONAL ACCESSORIES

GRA-426 Rack Adapter Panel	GCP-100 Current Probe, DC-100KHz, 100A, Current Probe
GAk-003 50Ω Impedance Adapter	GCP-1030 Current Probe, DC-100MHz, 30Arms, Current Probe
GSC-008 Soft Carrying Case	GCP-206P Current Probe - Power Supply, 2 Channel Power Supply for GCP-530/1030
GTL-246 USB Cable, USB 2.0, A-B Type, 1200mm	GCP-425P Current Probe - Power Supply, 4 Channel Power Supply for GCP-530/1030
GDB-03 Oscilloscope Education & Training Kit	GCP-530 Current Probe, DC-50MHz, 30Arms, Current Probe
GCP-020 Current Probe, 40Hz-40kHz, 240A, Current Probe	GDP-025 Differential Probe, 25M High Voltage Differential Probe
GTP-033A Oscilloscope Probe, 35MHz 1:1 Passive Probe	GDP-050 Differential Probe, 50M High Voltage Differential Probe

FREE DOWNLOAD

PC Software	OpenWave software	Driver	USB driver ; LabView driver
--------------------	-------------------	---------------	-----------------------------



P. O. Box 99
Corby
Northants NN17 9RS
England
Tel: +44(0) 1536 201234