

NC7WZ17

TinyLogic® UHS Dual Buffer with Schmitt Trigger Inputs

Features

- Space saving SC70 6-lead package
- Ultra small MicroPak™ Pb-Free leadless package
- Ultra high speed: t_{PD} 3.6ns Typ into 50pF at 5V V_{CC}
- High Output Drive: $\pm 24mA$ at 3V V_{CC}
- Broad V_{CC} operating range: 1.65V to 5.5V
- Matches the performance of LCX when operated at 3.3V V_{CC}
- Power down high impedance inputs/outputs
- Overvoltage tolerant inputs facilitate 5V to 3V translation
- Patented noise/EMI reduction circuitry implemented


General Description

The NC7WZ17 is a dual buffer with Schmitt trigger inputs from Fairchild's Ultra High Speed Series of TinyLogic® in the SC70 6-lead package. The device is fabricated with advanced CMOS technology to achieve ultra high speed with high output drive while maintaining low static power dissipation over a very broad V_{CC} operating range. The device is specified to operate over the 1.65V to 5.5V V_{CC} range. The inputs and outputs are high impedance when V_{CC} is 0V. Inputs tolerate voltages up to 7V independent of V_{CC} operating voltage. Schmitt trigger inputs typically achieve 1V hysteresis between the positive going and negative going input threshold voltage at 5V V_{CC} .

Ordering Information


| Order Number | Package Number | Package Code Top Mark | Package Description | Supplied As |
|--------------|----------------|-----------------------|-------------------------------------|---------------------------|
| NC7WZ17P6X | MAA06A | Z17 | 6-Lead SC70, EIAJ SC88, 1.25mm Wide | 3k Units on Tape and Reel |
| NC7WZ17L6X | MAC06A | B5 | Pb-Free 6-Lead MicroPak, 1.0mm Wide | 5k Units on Tape and Reel |

Device also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering number.

 All packages are lead free per JEDEC: J-STD-020B standard.


Connection Diagrams

Pin Assignment for SC70



(Top View)


Pin One Orientation Diagram



AAA represents Product Code Top Mark – see ordering code


Note: Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Pad Assignments for MicroPak



(Top Through View)

Logic Symbol



Function Table

$$Y = A$$

| Input | Output |
|-------|--------|
| A | Y |
| L | L |
| H | H |

H = HIGH Logic Level

L = LOW Logic Level

Pin Descriptions

| Pin Name | Description |
|---------------------------------|-------------|
| A ₁ , A ₂ | Data Inputs |
| Y ₁ , Y ₂ | Outputs |

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | Rating |
|------------------|---|-----------------|
| V_{CC} | Supply Voltage | -0.5V to +7V |
| V_{IN} | DC Input Voltage | -0.5V to +7V |
| V_{OUT} | DC Output Voltage | -0.5V to +7V |
| I_{IK} | DC Input Diode Current @ $V_{IN} < -0.5V$ | -50mA |
| I_{OK} | DC Output Diode Current @ $V_{OUT} < -0.5V$ | -50mA |
| I_{OUT} | DC Output Current | ±50mA |
| I_{CC}/I_{GND} | DC V_{CC}/GND Current | ±100mA |
| T_{STG} | Storage Temperature | -65°C to +150°C |
| T_J | Junction Temperature under Bias | 150°C |
| T_L | Junction Lead Temperature (Soldering, 10 seconds) | 260°C |
| P_D | Power Dissipation @ +85°C | 180mW |

Recommended Operating Conditions⁽¹⁾

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol | Parameter | Rating |
|---------------|-------------------------------|----------------|
| V_{CC} | Supply Voltage Operating | 1.65V to 5.5V |
| | Supply Voltage Data Retention | 1.5V to 5.5V |
| V_{IN} | Input Voltage | 0V to 5.5V |
| V_{OUT} | Output Voltage | 0V to V_{CC} |
| T_A | Operating Temperature | -40°C to +85°C |
| θ_{JA} | Thermal Resistance | 350°C/W |

Note:

1. Unused inputs must be held HIGH or LOW. They may not float.

DC Electrical Characteristics

| Symbol | Parameter | V _{CC} (V) | Conditions | T _A = | | | | | Units | | | | |
|------------------|----------------------------|-----------------------|--|----------------------------|-------------------------|-----------------------------------|-----------------------------------|-------------------------|-------|-----|------|-----|---|
| | | | | +25°C | | | -40°C to +85°C | | | | | | |
| | | | | Min. | Typ. | Max. | Min. | Max. | | | | | |
| V _P | Positive Threshold Voltage | 1.65 | | 0.6 | 1.0 | 1.4 | 0.6 | 1.4 | V | | | | |
| | | 1.8 | | 0.7 | 1.07 | 1.5 | 0.7 | 1.5 | | | | | |
| | | 2.3 | | 1.0 | 1.38 | 1.8 | 1.0 | 1.8 | | | | | |
| | | 3.0 | | 1.3 | 1.74 | 2.2 | 1.3 | 2.2 | | | | | |
| | | 4.5 | | 1.9 | 2.43 | 3.1 | 1.9 | 3.1 | | | | | |
| | | 5.5 | | 2.2 | 2.88 | 3.6 | 2.2 | 3.6 | | | | | |
| | | V _N | | Netative Threshold Voltage | 1.65 | | 0.2 | 0.5 | | 0.8 | 0.2 | 0.8 | V |
| 1.8 | 0.25 | | 0.56 | | 0.9 | | 0.25 | 0.9 | | | | | |
| 2.3 | 0.40 | | 0.75 | | 1.15 | | 0.40 | 1.15 | | | | | |
| 3.0 | 0.6 | | 0.98 | | 1.5 | | 0.6 | 1.5 | | | | | |
| 4.5 | 1.0 | | 1.42 | | 2.0 | | 1.0 | 2.0 | | | | | |
| 5.5 | 1.2 | | 1.68 | | 2.3 | | 1.2 | 2.3 | | | | | |
| V _H | Hystersis Voltage | | 1.65 | | | | 0.1 | 0.48 | 0.9 | 0.1 | 0.9 | V | |
| | | 1.8 | 0.15 | 0.51 | | 1.0 | 0.15 | 1.0 | | | | | |
| | | 2.3 | 0.25 | 0.62 | | 1.1 | 0.25 | 1.1 | | | | | |
| | | 3.0 | 0.4 | 0.76 | | 1.2 | 0.4 | 1.2 | | | | | |
| | | 4.5 | 0.6 | 1.01 | | 1.5 | 0.6 | 1.5 | | | | | |
| | | 5.5 | 0.7 | 1.20 | | 1.7 | 0.7 | 1.7 | | | | | |
| | | V _{OH} | HIGH Level Output Voltage | 1.65 | | V _{IN} = V _{IH} | I _{OH} = -100μA | 1.55 | 1.65 | | 1.55 | | V |
| 1.8 | 1.7 | | | 1.8 | | | | 1.7 | | | | | |
| 2.3 | 2.2 | | | 2.3 | | | | 2.2 | | | | | |
| 3.0 | 2.9 | | | 3.0 | | | | 2.9 | | | | | |
| 4.5 | 4.4 | | | 4.5 | | | | 4.4 | | | | | |
| 1.65 | I _{OH} = -4mA | | | 1.29 | 1.52 | | | | 1.29 | | | | |
| 2.3 | | | | I _{OH} = -8mA | 1.9 | 2.14 | | 1.9 | | | | | |
| 3.0 | | | | | I _{OH} = -16mA | 2.4 | 2.75 | | 2.4 | | | | |
| 3.0 | | | | I _{OH} = -24mA | | 2.3 | 2.62 | | 2.3 | | | | |
| 4.5 | | | | | I _{OH} = -32mA | 3.8 | 4.13 | | 3.8 | | | | |
| V _{OL} | | | | LOW Level Output Voltage | | 1.65 | V _{IN} = V _{IL} | I _{OL} = 100μA | | 0.0 | 0.1 | | |
| | | | | | 1.8 | | | | 0.0 | 0.1 | | 0.1 | |
| | 2.3 | | | | | 0.0 | | | 0.1 | | 0.1 | | |
| | 3.0 | | 0.0 | | 0.1 | | | | 0.1 | | | | |
| | 4.5 | | 0.0 | | 0.1 | | | | 0.1 | | | | |
| | 1.65 | I _{OL} = 4mA | 0.08 | | 0.24 | | | | 0.24 | | | | |
| | 2.3 | | I _{OL} = 8mA | | 0.10 | 0.3 | | | | 0.3 | | | |
| | 3.0 | | | | I _{OL} = 16mA | 0.16 | | | 0.4 | | 0.4 | | |
| | 3.0 | | I _{OL} = 24mA | | | 0.24 | | | 0.55 | | 0.55 | | |
| | 4.5 | | | | I _{OL} = 32mA | 0.25 | | | 0.55 | | 0.55 | | |
| I _{IN} | Input Leakage Current | 0–5.5 | V _{IN} = 5.5V, GND | | | | ±0.1 | | ±1.0 | μA | | | |
| I _{OFF} | Power Off Leakage Current | 0.0 | V _{IN} or V _{OUT} = 5.5V | | | 1 | | 10 | μA | | | | |
| I _{CC} | Quiescent Supply Current | 1.65–5.5 | V _{IN} = 5.5V, GND | | | 1.0 | | 10 | μA | | | | |


AC Electrical Characteristics

| Symbol | Parameter | V _{CC} (V) | Conditions | T _A = | | | | | Units | Figure Number |
|-------------------------------------|-------------------------------|---------------------|--|---|------|------|----------------|------|-------|----------------------|
| | | | | +25°C | | | -40°C to +85°C | | | |
| | | | | Min. | Typ. | Max. | Min. | Max. | | |
| t _{PLH} , t _{PHL} | Propagation Delay | 1.65 | C _L = 15pF, R _L = 1MΩ | 2.0 | 8.3 | 14.3 | 2.0 | 15.8 | ns | Figure 1 Figure 3 |
| | | 1.8 | | 2.0 | 6.9 | 11.9 | 2.0 | 13.1 | | |
| | | 2.5 ± 0.2 | | 1.5 | 4.8 | 8.2 | 1.5 | 9.0 | | |
| | | 3.3 ± 0.3 | | 1.0 | 3.7 | 5.6 | 1.0 | 6.2 | | |
| | | 5.0 ± 0.5 | | 0.8 | 3.0 | 4.7 | 0.8 | 5.2 | | |
| | | 3.3 ± 0.3 | | C _L = 50pF, R _L = 500Ω | 1.5 | 4.3 | 6.6 | 1.5 | | |
| 5.0 ± 0.5 | 1.0 | 3.6 | 5.6 | | 1.0 | 6.2 | | | | |
| C _{IN} | Input Capacitance | 0 | | | 2.5 | | | | pF | |
| C _{PD} | Power Dissipation Capacitance | 3.3 | (2) | | 10 | | | | pF | Figure 2 |
| | | 5.0 | | | 12 | | | | | |

Notes:


2. C_{PD} is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I_{CCD}) at no output loading and operating at 50% duty cycle. (See Figure 2.) C_{PD} is related to I_{CCD} dynamic operating current by the expression: I_{CCD} = (C_{PD})(V_{CC})(f_{IN}) + (I_{CC}static).

AC Loading and Waveforms

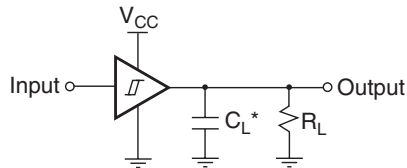

*C_L includes load and stray capacitance.
Input PRR = 1.0MHz; t_w = 500ns

Figure 1. AC Test Circuit



Input = AC Waveform; t_r, t_f = 1.8ns;
PRR = 10MHz; Duty Cycle = 50%

Figure 2. I_{CCD} Test Circuit

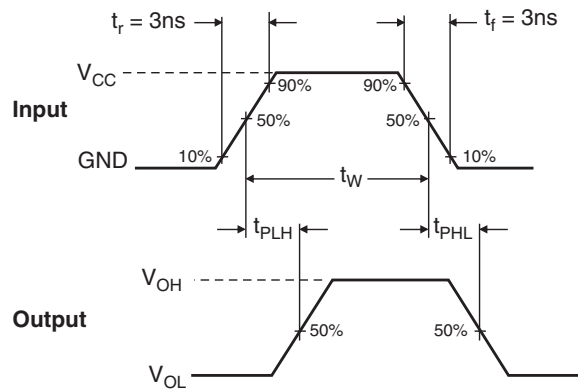



Figure 3. AC Waveforms

Tape and Reel Specification

Tape Format for SC70

| Package Designator | Tape Section | Number Cavities | Cavity Status | Cover Tape Status |
|--------------------|--------------------|-----------------|---------------|-------------------|
| P6X | Leader (Start End) | 125 (typ) | Empty | Sealed |
| | Carrier | 3000 | Filled | Sealed |
| | Trailer (Hub End) | 75 (typ) | Empty | Sealed |


Tape Dimension inches (millimeters)

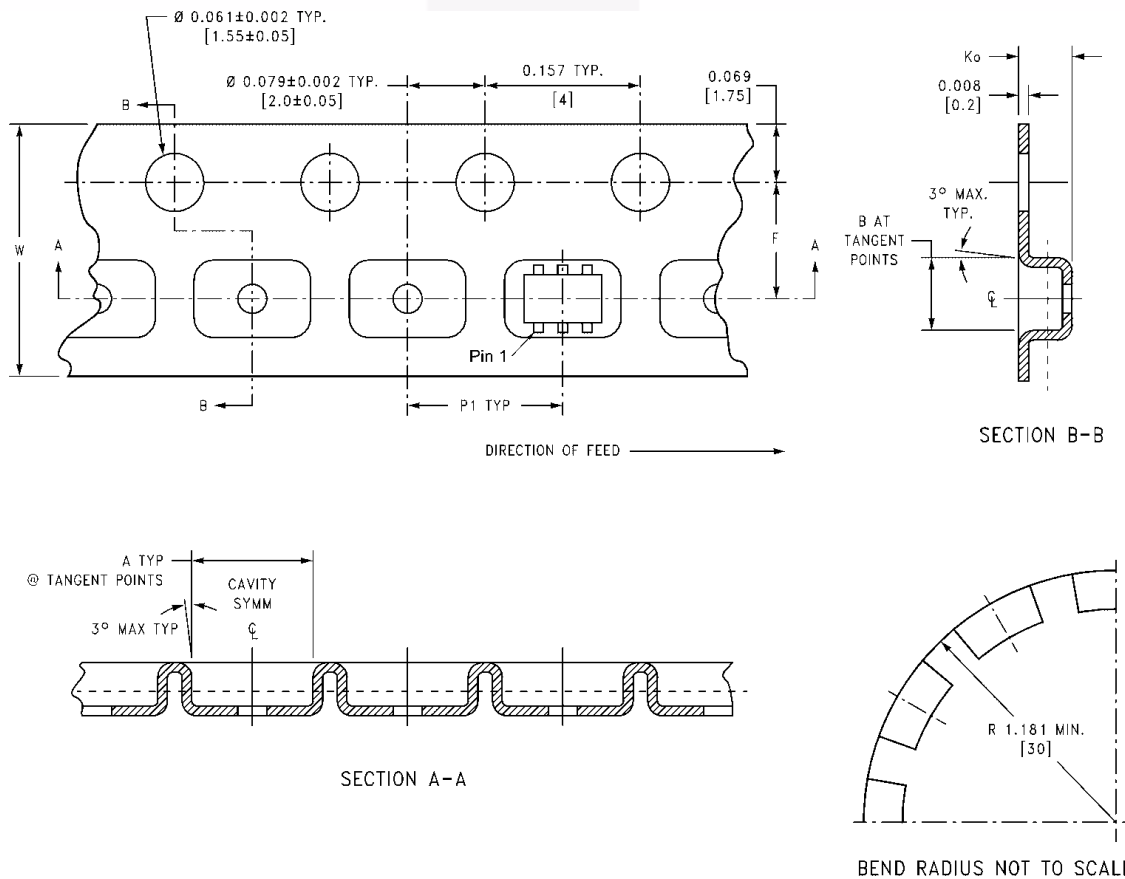

| Package | Tape Size | Dim A | Dim B | Dim F | Dim K _O | Dim P1 | Dim W |
|---------|-----------|-----------------|-----------------|-------------------------------|--------------------------------|--------------|----------------------------|
| SC70-6 | 8mm | 0.093 (2.35) | 0.096 (2.45) | 0.138 ± 0.004 (3.5 ± 0.10) | 0.053 ± 0.004 (1.35 ± 0.10) | 0.157 (4) | 0.315 ± 0.004 (8 ± 0.1) |

Tape and Reel Specification (Continued)

Reel Dimension for MicroPak inches (millimeters)

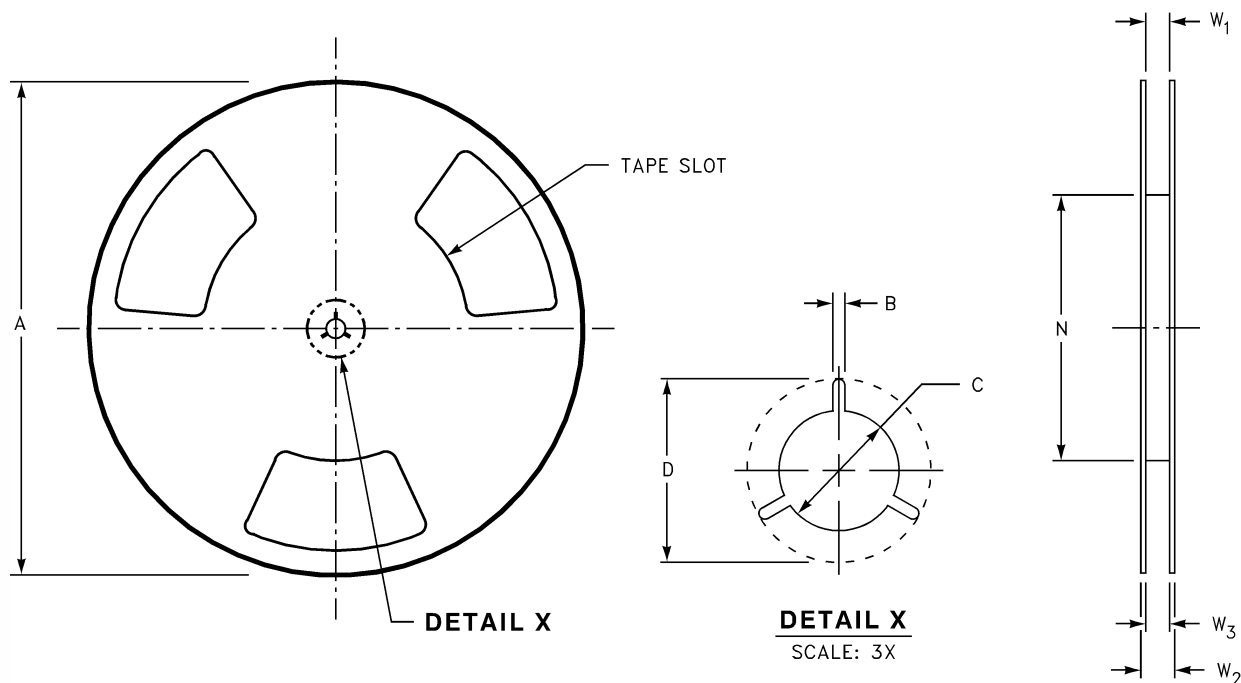


| Tape Size | A | B | C | D | N | W1 | W2 | W3 |
|-----------|----------------|-----------------|------------------|------------------|------------------|---|------------------|--|
| 8mm | 7.0 (177.8) | 0.059 (1.50) | 0.512 (13.00) | 0.795 (20.20) | 2.165 (55.00) | 0.331 + 0.059/-0.000 (8.40 + 1.50/-0.00) | 0.567 (14.40) | W1 + 0.078/-0.039 (W1 + 2.00/-1.00) |

Tape and Reel Specification (Continued)

Tape Format for MicroPak

| Package Designator | Tape Section | Number Cavities | Cavity Status | Cover Tape Status |
|--------------------|--------------------|-----------------|---------------|-------------------|
| L6X | Leader (Start End) | 125 (typ) | Empty | Sealed |
| | Carrier | 3000 | Filled | Sealed |
| | Trailer (Hub End) | 75 (typ) | Empty | Sealed |

Tape Dimension inches (millimeters)

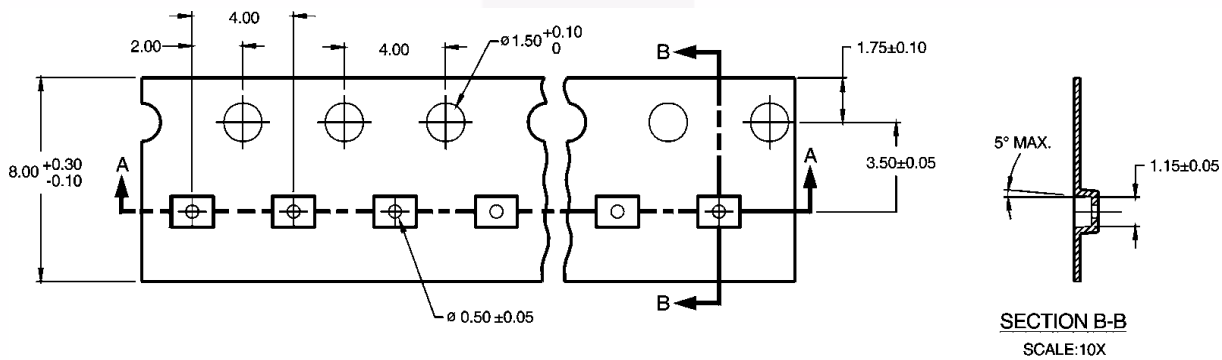

Physical Dimensions


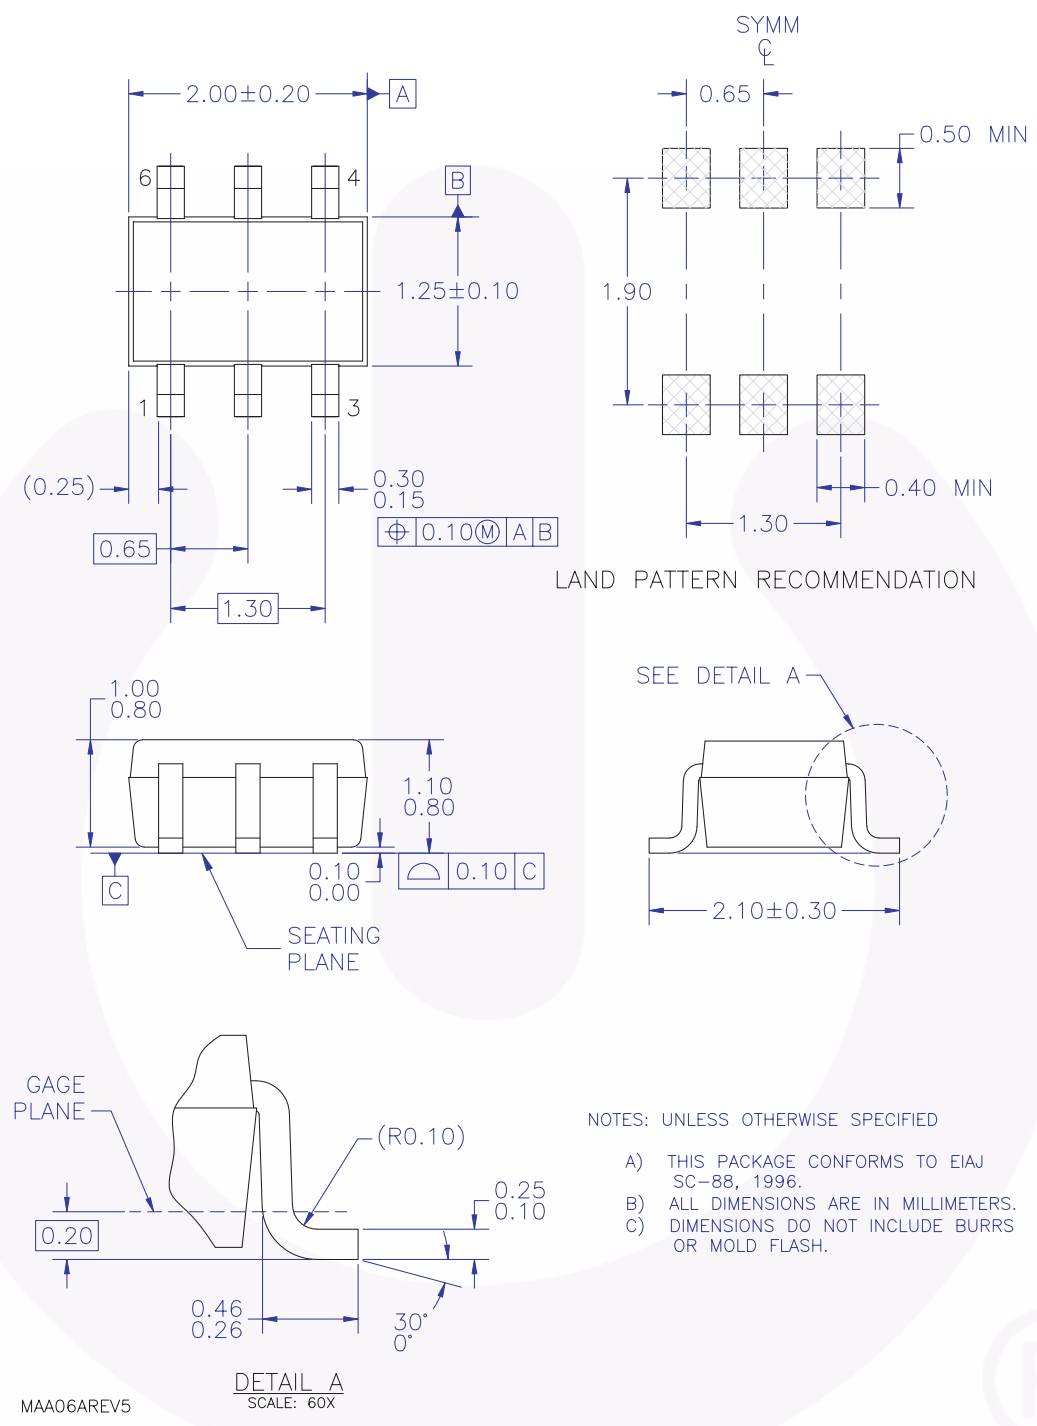


Figure 4. 6-Lead SC70, EIAJ SC88, 1.25mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:
<http://www.fairchildsemi.com/packaging/>

Physical Dimensions (Continued)

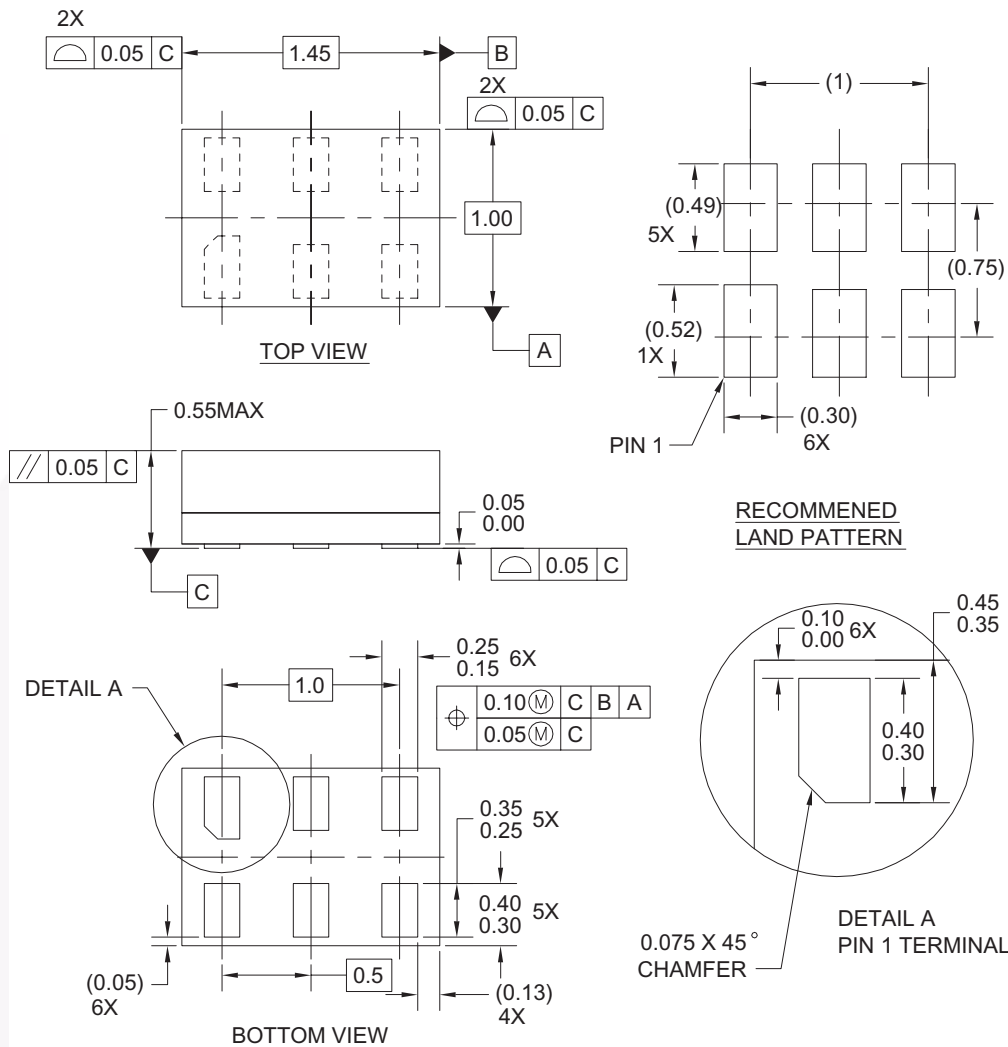

Notes:

1. CONFORMS TO JEDEC STANDARD M0-252 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y14.5M-1994

MAC06AREVC

Figure 5. 6-Lead MicroPak, 1.0mm Wide

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.



Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:

<http://www.fairchildsemi.com/packaging/>



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- | | | | |
|---|--|--|----------------------------------|
| ACEx [®] | FPS [™] | PDP-SPM [™] | SupreMOS [™] |
| Build it Now [™] | FRFET [®] | Power220 [®] | SyncFET [™] |
| CorePLUS [™] | Global Power Resource SM | POWEREDGE [®] | SYSTEM [®] |
| CROSSVOLT [™] | Green FPS [™] | Power-SPM [™] | GENERAL [®] |
| CTL [™] | Green FPS [™] e-Series [™] | PowerTrench [®] | The Power Franchise [®] |
| Current Transfer Logic [™] | GTO [™] | Programmable Active Droop [™] | power [®] |
| EcoSPARK [®] | i-Lo [™] | QFET [®] | the |
| EZSWITCH [™] * | IntelliMAX [™] | QS [™] | franchise |
|  ™ | ISOPLANAR [™] | QT Optoelectronics [™] | TinyBoost [™] |
|  ™ | MegaBuck [™] | Quiet Series [™] | TinyBuck [™] |
| Fairchild [®] | MICROCOUPLER [™] | RapidConfigure [™] | TinyLogic [®] |
| Fairchild Semiconductor [®] | MicroFET [™] | SMART START [™] | TINYOPTO [™] |
| FACT Quiet Series [™] | MicroPak [™] | SPM [®] | TinyPower [™] |
| FACT [®] | MillerDrive [™] | STEALTH [™] | TinyPWM [™] |
| FAST [®] | Motion-SPM [™] | SuperFET [™] | TinyWire [™] |
| FastvCore [™] | OPTOLOGIC [®] | SuperSOT [™] 3 | μSerDes [™] |
| FlashWriter [®] * | OPTOPLANAR [®] | SuperSOT [™] 6 | UHC [®] |
| | | SuperSOT [™] 8 | Ultra FRFET [™] |
| | | | UniFET [™] |
| | | | VCX [™] |

* EZSWITCH[™] and FlashWriter[®] are trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|--|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild Semiconductor. The datasheet is printed for reference information only. |

Rev. I33