




Connectors > Modular Jacks & Plugs > RJ25 Connectors

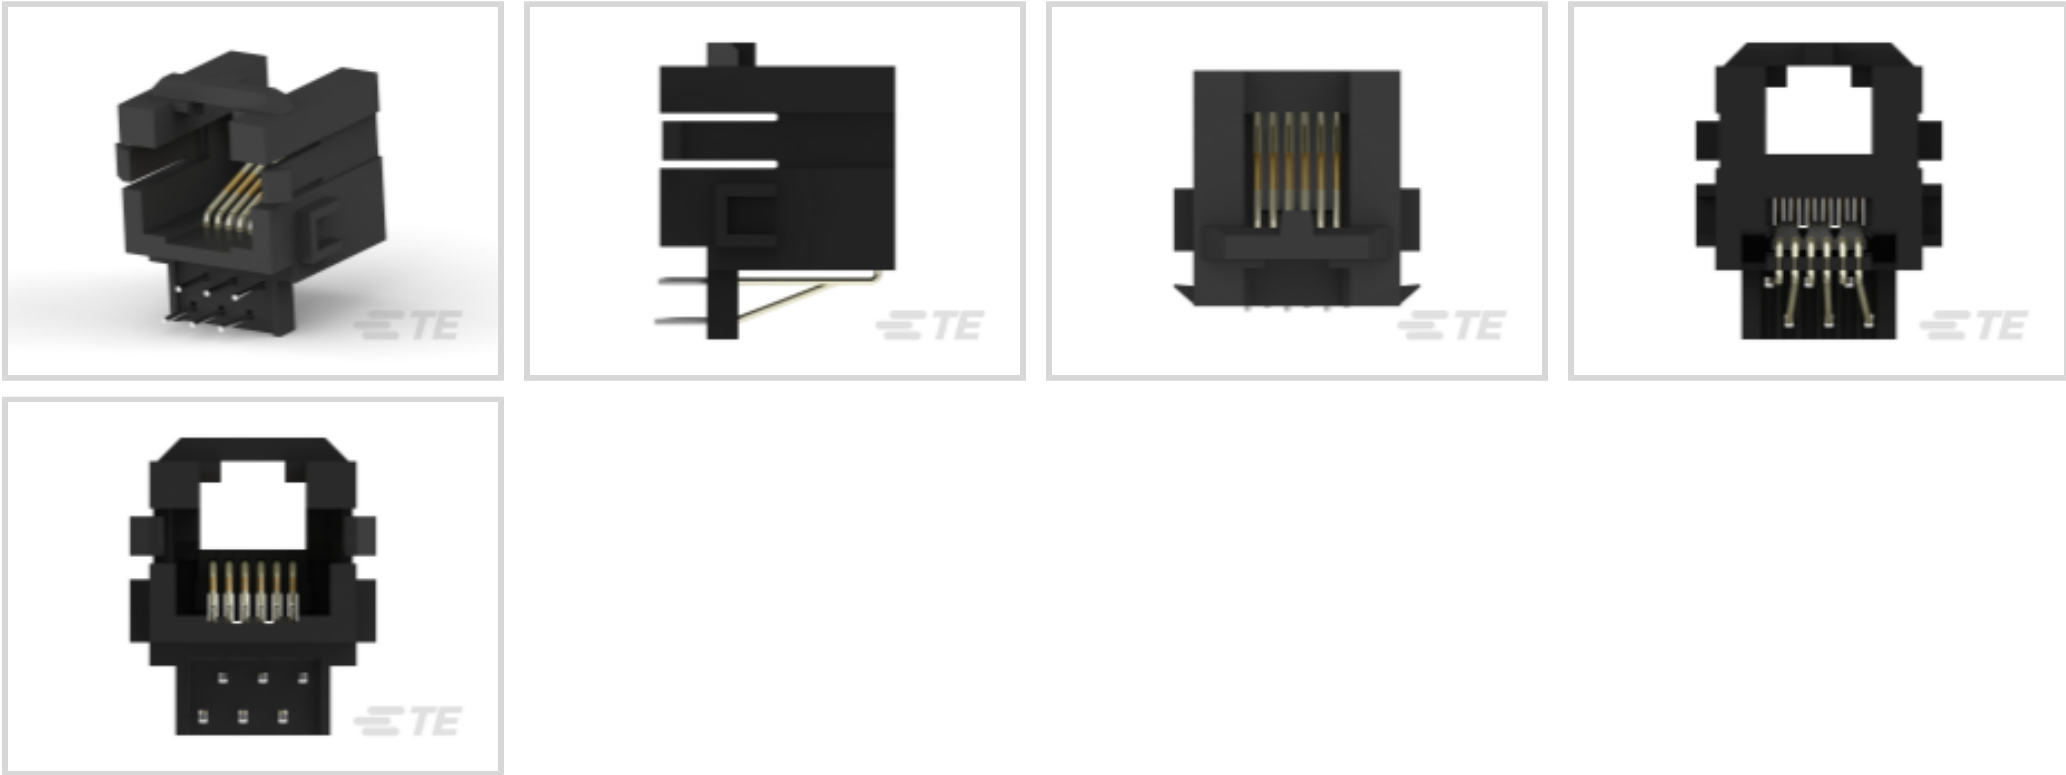

Port Configuration: **Single Port**

Port Matrix Configuration: **1 x 1**

Connector Profile: **Low**

Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**

Connector Contact Density: **Standard**

Features

Product Type Features

Grounding Options	None
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly
Connector System	Cable-to-Board
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack

Configuration Features

Number of Positions	6
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
PCB Mount Orientation	Vertical
Number of Loaded Positions	6

Body Features

Connector Profile	Low
-------------------	-----



Modular Jack Latch Orientation

Standard - Latch Down

Contact Features

Contact Underplating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold (Au)
Contact Current Rating (Max)	1.5 A
PCB Contact Termination Area Plating Material	Tin-Lead

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	2.79 mm[.11 in]

Mechanical Attachment

Mating Alignment	Without
Connector Mounting Type	Board Mount
Panel Mount Feature	With

Housing Features

Mating Entry Location	Bottom
Housing Color	Black
Housing Material	Nylon
Centerline (Pitch)	1.02 mm[.04 in]

Dimensions

Connector Height	12 mm[.472 in]
PCB Thickness (Recommended)	1.6 mm[.062 in]

Usage Conditions

Operating Temperature Range	-40 – 70 °C[-40 – 158 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
Shielded	No

Industry Standards

Performance Category	Cat 3
UL Flammability Rating	UL 94HB

Packaging Features

--	--



Packaging Reel Diameter	60 cm
Packaging Method	Piece/Reel, Tape Mounted on Reel
Packaging Quantity	700

Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Also in the Series | OEG Miniature Relay PCF

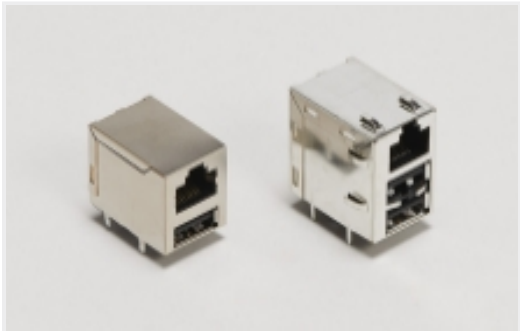

Combo Jacks(1)



Connector Contacts(1)

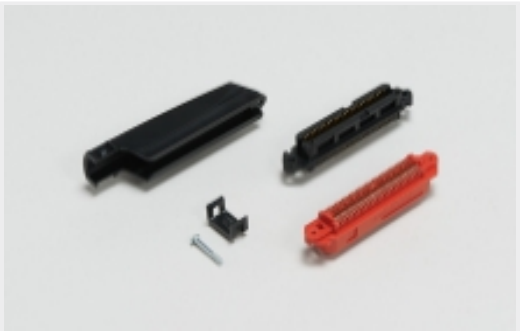

IDC D-Sub Connectors(1)



Mini PCI Express & mSATA(1)



Power Contacts(1)



RJ14 Connectors(1)




RJ22 Connectors(1)




RJ25 Connectors(7)


Customers Also Bought

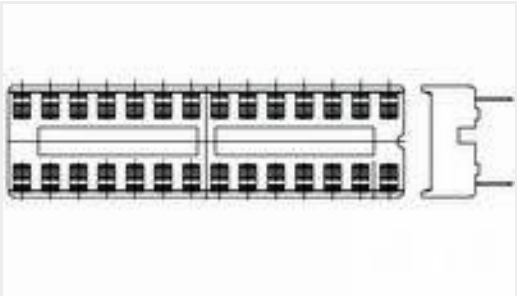


TE Part #1-2199298-4
16P,DIP SKT,300 CL,LDR,PB FREE

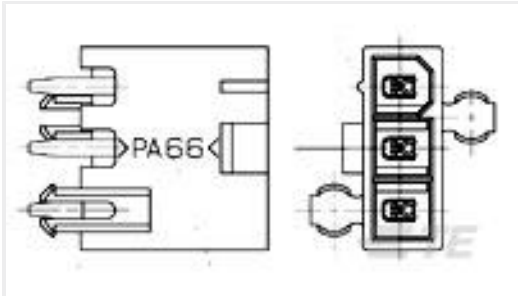

TE Part #2029056-3
3P VAL-U-LOK SR HDR SN V0 W/DH

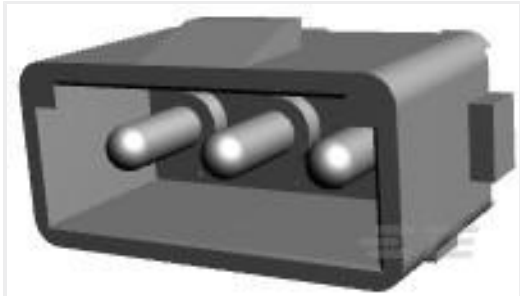

TE Part #350541-1
03P CMNL HDR ASSY SHORT NATL

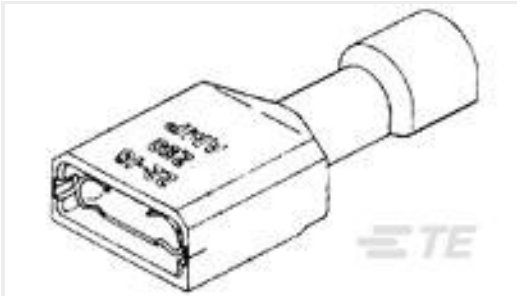


TE Part #3-520140-2
ULTRA-FAST 250 ASY REC 16-14 AWG TPBR



TE Part #1-338088-6
8/8 INV.MOD.JACK




TE Part #5-146269-1
02 MODII HDR DRST B/A 100 W/DH

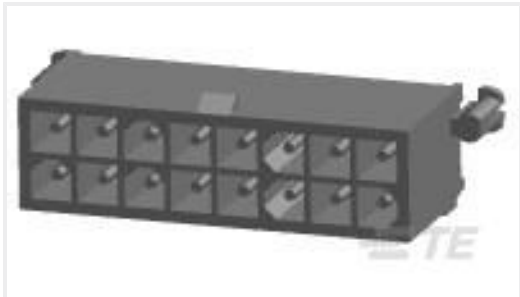

TE Part #1-794068-0
16P MINI UMNL HDR W/DH SN



TE Part #641832-1
06P UMNL PIN HDR ASSY V2 NATL

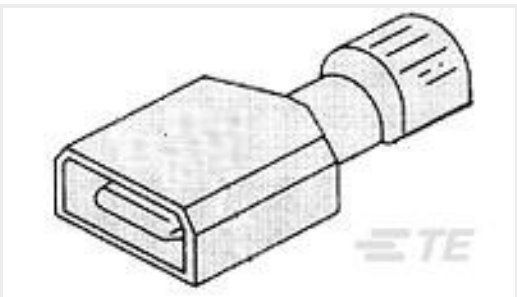

TE Part #2-520102-2
ULTRA-FAST 250 ASSEMBLY TAB 22-18 AWG BR



TE Part #770186-1
12P MINI-UMNL ASSY V0 SNNI*

Documents

Product Drawings
6/6 PCB MOD.JACK BE

English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_216446-1_J.2d_dxf.zip



English

Customer View Model

[ENG_CVM_CVM_216446-1_J.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_216446-1_J.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82066 - Modular Jacks and MRJ21 Product catalog - Single Port Modular Jacks section](#)

English

[1-1773464-9_MODULAR_JACKS_SINGLE_PORT_PCB_MOUNT](#)

English

Agency Approvals

[UL Report](#)

English