



Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > FFC Connectors



FFC Connector Product Type: **Housing**

Connector System: **Wire-to-Board**

Number of Positions: **26**

Centerline (Pitch): **2.54 mm [.1 in]**

Number of Rows: **2**

Features

Product Type Features

|                                   |               |
|-----------------------------------|---------------|
| Connector & Contact Terminates To | Wire & Cable  |
| Connector & Housing Type          | Plug          |
| FFC Connector Product Type        | Housing       |
| Connector System                  | Wire-to-Board |
| Insertion Force Type              | Normal        |

Configuration Features

|                     |    |
|---------------------|----|
| Number of Positions | 26 |
| Number of Rows      | 2  |

Electrical Characteristics

|                                       |         |
|---------------------------------------|---------|
| Operating Voltage                     | 300 VAC |
| Insulation Resistance                 | 5000 MΩ |
| Dielectric Withstanding Voltage (Max) | 720 VAC |

Body Features

|                       |       |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features



|              |     |
|--------------|-----|
| Contact Type | Pin |
|--------------|-----|

Mechanical Attachment

|                         |                            |
|-------------------------|----------------------------|
| Mating Alignment Type   | Polarization               |
| Mating Retention Type   | Detent Window              |
| Mating Retention        | With                       |
| Mating Alignment        | With                       |
| Panel Mount Feature     | Without                    |
| Connector Mounting Type | Cable Mount (Free-Hanging) |

Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | Nylon - GF     |
| Centerline (Pitch) | 2.54 mm[.1 in] |
| FFC Cable Entry    | Straight       |

Dimensions

|                    |                |
|--------------------|----------------|
| Row-to-Row Spacing | 2.54 mm[.1 in] |
|--------------------|----------------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -65 – 105 °C[-85 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 1       |
| Packaging Method   | Package |

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                |
|-----------------------------------------------|------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2025 (247)<br>Candidate List Declared Against: JAN 2025 (247) |



Does not contain REACH SVHC

|                           |                                                        |
|---------------------------|--------------------------------------------------------|
| Halogen Content           | BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources. |
| Solder Process Capability | Not applicable for solder process capability           |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-F439-P65254  
2.54mm FFC Connectors Pin Contacts

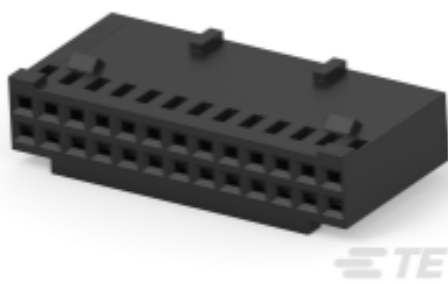

TE Part # 2-87631-1  
26 MODIV HSG COMP DR .100 POL



TE Part # 2-87631-2  
26 MODIV HSG DR MRKD .100 POL

Customers Also Bought



TE Part #CAT-D48-ST273  
DEUTSCH Solid Contacts



TE Part #DT04-2P  
REC, 2P, GRY, N




TE Part #DT06-2S  
PLG, 2P, GRY, N



TE Part #CAT-D487-W416  
Wedgelocks: DEUTSCH DT



TE Part #CAT-AM71-CH8172  
AMP SUPERSEAL 1.5MM,  
CONNECTOR HOUSING

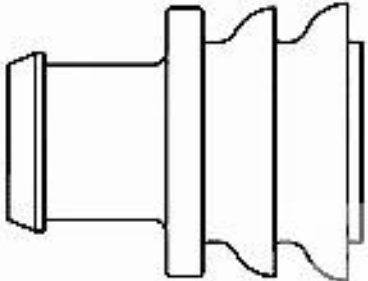

TE Part #281934-2  
SINGLE WIRE SEAL



TE Part #114017-ZZ  
SEALING PLUG, SIZE 12/16, WHT





Documents

Product Drawings

026 HOUSING FFC PIN DR 100CL

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_1-88189-0\_AS.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_1-88189-0\_AS.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_1-88189-0\_AS.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Instruction Sheet (U.S.)

English

Extraction Tool for Flexible Flat Cable (FFC)

English

Agency Approvals

CSA Certificate

English