

DIN-Signal coding key



Image is for illustration purposes only. Please refer to product description.

Part number	09 02 000 9901
Specification	DIN-Signal coding key
HARTING eCatalogue	https://harting.com/09020009901

Identification

Category	Accessories
Series	DIN 41612
Type of accessory	Coding pin
Description of the accessory	for types B, 2B, 3B, C, 2C, 3C, M, M-flat, M invers, Q, 2Q, 3Q, R, RM, R (HE 11), 2R, 3R, R extended, har-bus [®] 64

Technical characteristics

Isolation group	IIIa ($175 \leq CTI < 400$)
-----------------	-------------------------------

Material properties

Material (accessories)	Thermoplastic
Colour (accessories)	Black
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained

Specifications and approvals

Railway classification	F1/I2 acc. to NFF 16-101/102
------------------------	------------------------------




Pushing Performance
Since 1945

Commercial data

Packaging size	100
Net weight	0.02 g
Country of origin	Germany
European customs tariff number	85389099
GTIN	5713140002999
eCl@ss	27440203 Coding for industrial connectors
ETIM	EC002311
UNSPSC 24.0	39121421

Coding pin

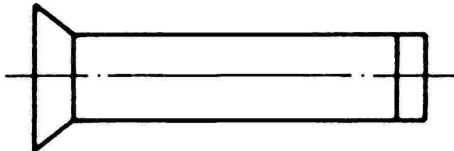

To avoid accidental and incorrect mating of adjacent connectors a coding system is required. The coding is achieved by means of a coding pin which is inserted into the selected chamber of the female connector (the contact cavity must be filled with a female contact!). The opposite male contact must be removed with the help of the specially designed tool. It's recommended to use a number of coding pins in relation to the total number of contacts per connector: 3 pins for 64 contacts, 7 pins for 160 contacts.