

Pin busbar, 16 mm² 16 MW, 4-phase, can be cut FI 4P N right and 6 MCB 1P+N touch-safe with end caps



Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
General technical data	
compatibility	for 6 MCBs 1P+N with 1 RCCB 3P+N, N right
phase number	4
Main circuit	
operational current rated value	80 A
Suitability	
suitability for interaction devices with auxiliary switch	No
suitability for interaction devices with N conductor	Yes
Appearance	
color	light grey
Product details	
product feature insulated	Yes
product function	
• suitable for compact devices	No
• can be cut	Yes
Number	
number of devices suitable for fitting	7
Connections	
type of electrical connection	Pin
Mechanical Design	
module width	18 mm
height	18 mm
width	22 mm
length	292 mm
number of modular width units	16
cross-section	16 mm ²
net weight	153 g
Approvals Certificates	
General Product Approval	other



[Miscellaneous](#)



[Miscellaneous](#)

other	Environment
-------	-------------

[Confirmation](#)

[Environmental Con-
firmations](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3770-5>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3770-5>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3770-5


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

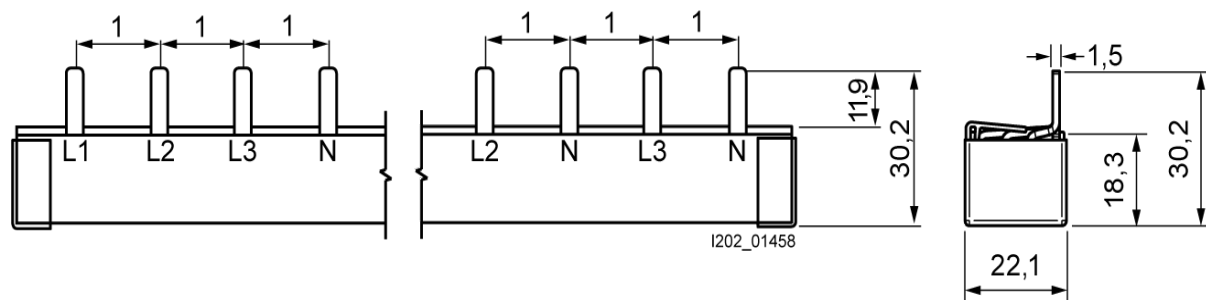

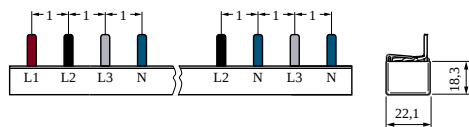

last modified:

7/1/2025 

