



Micro PLC
expansion
module, 2 analog
outputs 0...
10VDC/0...20mA
LRE02AD024
24VDC
N° 2 analog

Product designation

Product type designation

Auxiliary supply voltage

Number of outputs

N° 2 analog

Power supply

Rated auxil. supply voltage

24VDC

Operating voltage range

20.4...28.8VDC

Average current consumption

mA 70

Analog outputs

Number of analog output

n° 2

Analog output type

Configurable
voltage or current
outputs

Resolution

Voltage outputs:
10mV Current
outputs: 40µA

Accuracy

% ±2.5%

Connections

Terminals type

Screw

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Relative humidity

% <90% (non
condensing)

Housing

Mounting

35mm DIN rail or
screw fixing
(M4x15mm)

Degree of protection

IP20


Dimensions (W x H x D)

mm 38 x 106 x 59.3


Weight

g 160

Dimensions

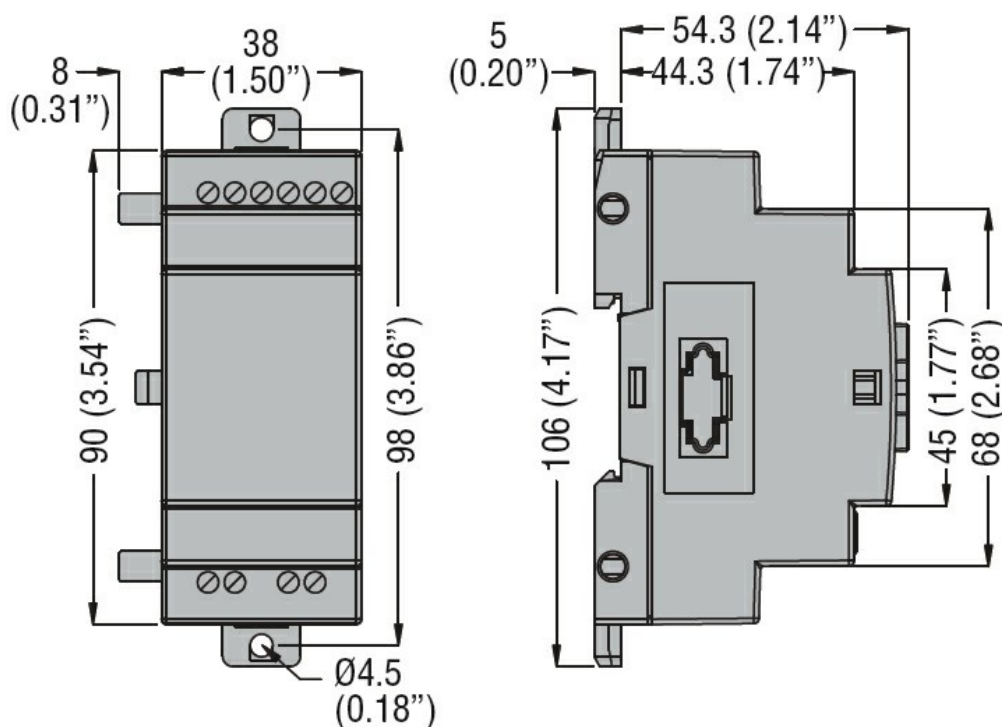

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 142
IEC/EN 61131-2
UL508

Certificates

cULus
EAC