



Brand of **NTN corporation**

## Technical data

### 6200FT150


Single row deep groove ball bearings



TOPLINE deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides, applications up to 150°C.

**TOPLINE**

### VISUAL (S)

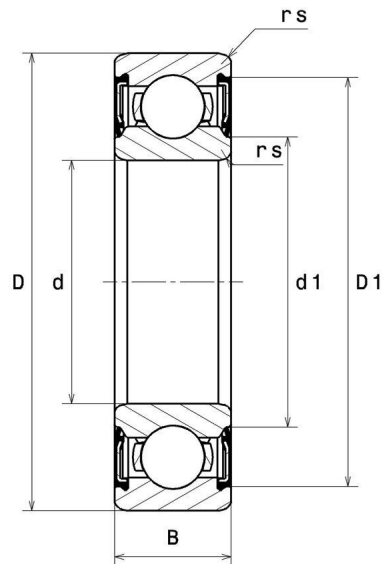


**NTN Europe**

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00  
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072  
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

# 6200FT150

Single row deep groove ball bearings

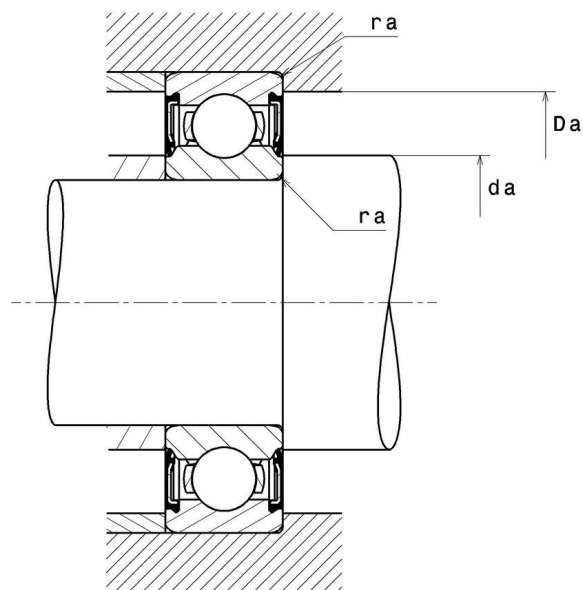

## PRODUCT DEFINITION

|  |          |
|--|----------|
| <b>Brand</b>                             | SNR      |
| <b>d - Internal diameter</b>             | 10 mm    |
| <b>D - External diameter</b>             | 30 mm    |
| <b>B - Bearing/Inner ring width</b>      | 9 mm     |
| <b>d1 - External diameter inner ring</b> | 16 mm    |
| <b>D1 - Inner diameter outer ring</b>    | 25,7 mm  |
| <b>rs - Min fillet radius</b>            | 0,6 mm   |
| <b>Radial clearance class</b>            | C3       |
| <b>Mass</b>                              | 0,033 kg |

## PRODUCT PERFORMANCE

|                                |            |
|--------------------------------|------------|
| <b>C - Dynamic load</b>        | 6300000 mN |
| <b>C0 - Static load</b>        | 2600000 mN |
| <b>Cu - Fatigue limit load</b> | 120000 mN  |



**NTN Europe**

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00  
 S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072  
 SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

# 6200FT150

Single row deep groove ball bearings

## PRODUCT PERFORMANCE

|   |            |
|---|------------|
| <b>f0 - Coefficient</b>                 | 12.1       |
| <b>N lim - Mechanical Limit Speed</b>   | 108000 %/s |
| <b>Tmin - Min operating temperature</b> | 243,15 °K  |
| <b>Tmax - Max operating temperature</b> | 423,15 °K  |

## BEARING FREQUENCIES

|   |          |
|---|----------|
| <b>BPFO - Over rolling frequency on outer ring (60 rpm)</b>     | 2.528 Hz |
| <b>BPFI - Over rolling frequency on inner (60 rpm)</b>          | 4.472 Hz |
| <b>BSF - Over rolling frequency on rolling element (60 rpm)</b> | 3.322 Hz |
| <b>BRF - Rotational frequency - rolling element (60 rpm)</b>    | 1.661 Hz |
| <b>FTF - Rotational frequency - cage (60 rpm)</b>               | 0.361 Hz |

## ABUTMENT

|   |         |
|---|---------|
| <b>da min - Min shoulder diameter IR</b>              | 14 mm   |
| <b>da max - Max shoulder diameter IR</b>              | 33,6 mm |
| <b>Da max - Max shoulder diameter OR</b>              | 26 mm   |
| <b>ra max - Max shaft &amp; housing fillet radius</b> | 0,6 mm  |



**NTN Europe**

1 rue des Usines · BP 2017 · 74010 Annecy Cedex · France · Tel. +33 (0)4 50 65 30 00  
S.A. au capital de 322 639 919 € · RCS ANNECY B 325 821 072 · Id. Fiscale : FR 48 325 821 072  
SIRET 325 821 072 00015 · Code APE 2815 Z · Code NACE 28.15

## INDUSTRY CALCUL FACTORS

### Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

| $\frac{f_0 F_a}{C_0}$ | e    | Fa / Fr ≤ e |   | Fa / Fr > e |      |
|-----------------------|------|-------------|---|-------------|------|
|                       |      | X           | Y | X           | Y    |
| 0.172                 | 0.19 | 1           | 0 | 0.56        | 2.3  |
| 0.345                 | 0.22 |             |   |             | 1.99 |
| 0.689                 | 0.26 |             |   |             | 1.71 |
| 1.03                  | 0.28 |             |   |             | 1.55 |
| 1.38                  | 0.3  |             |   |             | 1.45 |
| 2.07                  | 0.34 |             |   |             | 1.31 |
| 3.45                  | 0.38 |             |   |             | 1.15 |
| 5.17                  | 0.42 |             |   |             | 1.04 |
| 6.89                  | 0.44 |             |   |             | 1    |

### Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

| $X_0$ | $Y_0$ |
|-------|-------|
| 0.6   | 0.5   |

For single or DT bearing arrangement :

If  $P_0 < F_r$ , then use  $P_0 = F_r$

