Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: 4Lite

Supplier's address: ANSELL (WARRINGTON), Ansell Electrical Products Ltd Unit 6B Stonecross Ind. Park Yew Tree Way Warrington Cheshire WA3 3JD

Model identifier: 4L3/3001N

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Lamp		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	D
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	2 450 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	18,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,30
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height: 1 214 Width: 28 Depth: 28	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[a]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,381 0,377
Parameters for LED and OLED light sources:				
R9 colour rendering index value		80	Survival factor	0,90
the lumen maintenance factor		0,96		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,70	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[b]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4

[a] '-' : not applicable;

[b] '-' : not applicable;

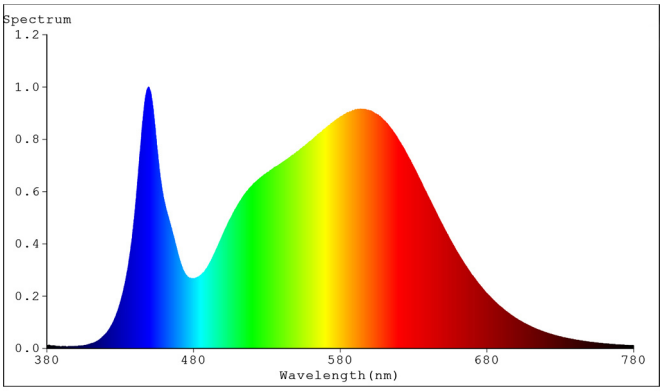
Spectrum
1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
480
580
680
780
Wavelength(nm)

Model placed on the Union market from 31/05/2025

EPREL registration number: 2317580

https://eprel.ec.europa.eu/qr/2317580

Supplier: Ansell (Sales & Distribution) Republic of Ireland (Manufacturer)

Website: http://www.anselluk.com/

Customer care service:

Name: ANSELL (WARRINGTON)

Website: http://www.anselluk.com/

Email: saleswarrington@anselluk.com

Phone: 01942 433333

Address:
Ansell Electrical Products Ltd
Unit 6B Stonecross Ind. Park
Yew Tree Way
Warrington
Cheshire
WA3 3JD