


Geberit Mapress Copper coupling

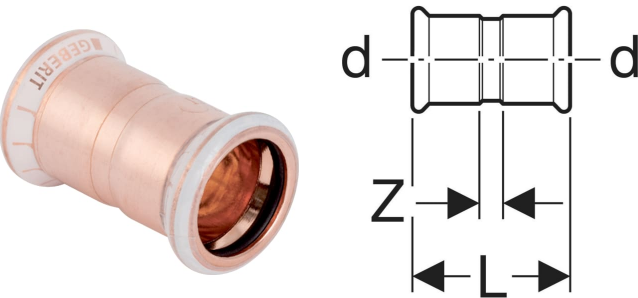

Example image

APPLICATION PURPOSES

- For cold and hot potable water
- For cooling and heating water without antifreeze agent
- For cooling and heating water with antifreeze agent
- For district heating water $\leq 120\text{ }^{\circ}\text{C}$
- For service water and process water
- For compressed air (oil purity class 0–3)

- For negative pressure
- For inert gases (e.g. nitrogen)
- For technical building systems, industry and shipbuilding

- Seal ring made of CIIR, black, up to $\varnothing \leq 54\text{ mm}$
- Seal ring made of EPDM, black, from $\varnothing > 54\text{ mm}$
- Pressing socket with transparent protection plug

CHARACTERISTICS

- Pressing indicator
- Leaky if unpressed up to $\varnothing \leq 54\text{ mm}$

TECHNICAL DATA

Product material	Cu-DHP copper CW024A (EN 1412)
------------------	--------------------------------

Art. no.	DN	d, $\varnothing$ mm	L cm	Z cm
62001	10	12	4.2	0.8
62002	12	15	4.8	0.8
62003	15	18	4.8	0.8
62004	20	22	5	0.8
62005	25	28	5.4	0.8

Art. no.	DN	d _g mm	L cm	z cm
62006	32	35	6.2	1
62007	40	42	7.1	1.1
62008	50	54	8.3	1.3
62010	65	66.7	12.7	2.7
62011	65	76.1	12.7	2.1
62012	80	88.9	14.5	2.5
62013	100	108	17.6	2.6