

RL78/L13 Group

Renesas Starter Kit Tutorial Manual
For e²studio

RENESAS MCU
RL78 Family / L1x Series

All information contained in these materials, including products and product specifications, represents information on the product at the time of publication and is subject to change by Renesas Electronics Corporation without notice. Please review the latest information published by Renesas Electronics Corporation through various means, including the Renesas Electronics Corporation website (<http://www.renesas.com>).

Notice

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anticrime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.

6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

Disclaimer

By using this Renesas Starter Kit (RSK), the user accepts the following terms:

The RSK is not guaranteed to be error free, and the entire risk as to the results and performance of the RSK is assumed by the User. The RSK is provided by Renesas on an "as is" basis without warranty of any kind whether express or implied, including but not limited to the implied warranties of satisfactory quality, fitness for a particular purpose, title and non-infringement of intellectual property rights with regard to the RSK. Renesas expressly disclaims all such warranties. Renesas or its affiliates shall in no event be liable for any loss of profit, loss of data, loss of contract, loss of business, damage to reputation or goodwill, any economic loss, any reprogramming or recall costs (whether the foregoing losses are direct or indirect) nor shall Renesas or its affiliates be liable for any other direct or indirect special, incidental or consequential damages arising out of or in relation to the use of this RSK, even if Renesas or its affiliates have been advised of the possibility of such damages.

Precautions

The following precautions should be observed when operating any RSK product:

This Renesas Starter Kit is only intended for use in a laboratory environment under ambient temperature and humidity conditions. A safe separation distance should be used between this and any sensitive equipment. Its use outside the laboratory, classroom, study area or similar such area invalidates conformity with the protection requirements of the Electromagnetic Compatibility Directive and could lead to prosecution.

The product generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off or on, you are encouraged to try to correct the interference by one or more of the following measures;

- ensure attached cables do not lie across the equipment
- reorient the receiving antenna
- increase the distance between the equipment and the receiver
- connect the equipment into an outlet on a circuit different from that which the receiver is connected
- power down the equipment when not in use
- consult the dealer or an experienced radio/TV technician for help NOTE: It is recommended that wherever possible shielded interface cables are used.

The product is potentially susceptible to certain EMC phenomena. To mitigate against them it is recommended that the following measures be undertaken;

- The user is advised that mobile phones should not be used within 10m of the product when in use.
- The user is advised to take ESD precautions when handling the equipment.

The Renesas Starter Kit does not represent an ideal reference design for an end product and does not fulfil the regulatory standards for an end product.

How to Use This Manual

1. Purpose and Target Readers

This manual is designed to provide the user with an understanding of how to use the e² studio IDE to develop and debug software for the RSK platform. It is intended for users designing sample code on the RSK platform, using the many different incorporated peripheral devices.

The manual comprises of step-by-step instructions to load and debug a project in e² studio, but does not intend to be a complete guide to software development on the RSK platform. Further details regarding operating the RL78/L13 microcontroller may be found in the Hardware Manual and within the provided sample code.

Particular attention should be paid to the precautionary notes when using the manual. These notes occur within the body of the text, at the end of each section, and in the Usage Notes section.

The revision history summarizes the locations of revisions and additions. It does not list all revisions. Refer to the text of the manual for details.

The following documents apply to the RL78/L13 Group. Make sure to refer to the latest versions of these documents. The newest versions of the documents listed may be obtained from the Renesas Electronics Web site.

Document Type	Description	Document Title	Document No.
User's Manual	Describes the technical details of the RSK hardware.	RSKRL78L13 User's Manual	R20UT2128EG
Tutorial	Provides a guide to setting up RSK environment, running sample code and debugging programs.	RSKRL78L13 Tutorial Manual	R20UT2129EG
Quick Start Guide	Provides simple instructions to setup the RSK and run the first sample, on a single A4 sheet.	RSKRL78L13 Quick Start Guide	R20UT2130EG
Schematics	Full detail circuit schematics of the RSK.	RSKRL78L13 Schematics	R20UT2124EG
Hardware Manual	Provides technical details of the RL78/L13 microcontroller.	RL78/L13 Group Hardware Manual	R01UH0382EJ

2. List of Abbreviations and Acronyms

Abbreviation	Full Form
ADC	Analog-to-Digital Converter
E1	On-chip Debugger
EMC	Electromagnetic Compatibility
ESD	Electrostatic Discharge
LCD	Liquid Crystal Display
LED	Light Emitting Diode
MCU	Micro-controller Unit
RSK	Renesas Starter Kit

Table of Contents

1. Overview.....	7
1.1 Purpose.....	7
1.2 Features.....	7
2. Introduction.....	8
2.1 Note Regarding Source Code.....	8
2.2 Application Leading Tool (Applilet).....	8
3. Tutorial Project Workspace.....	9
3.1 Introduction.....	9
3.2 Starting e ² studio and Importing Sample Code.....	9
3.3 Build Configurations and Debug Sessions.....	12
3.4 Running the Tutorial.....	14
4. Reviewing the Tutorial Program.....	15
4.1 Program Initialisation.....	15
4.2 Main Functions.....	17
5. Additional Information.....	20

1. Overview

1.1 Purpose

This RSK is an evaluation tool for Renesas microcontrollers. This manual describes how to get the RSK tutorial started, and basic debugging operations.

1.2 Features

This RSK provides an evaluation of the following features:

- Renesas microcontroller programming
- User code debugging
- User circuitry such as switches, LEDs and a potentiometer
- Sample application
- Sample peripheral device initialisation code

The RSK board contains all the circuitry required for microcontroller operation.

2. Introduction

This manual is designed to answer, in tutorial form, the most common questions asked about using a Renesas Starter Kit (RSK). The tutorials help explain the following:

- How do I compile, link, download and run a simple program on the RSK?
- How do I build an embedded application?
- How do I use Renesas' tools?

Files referred to in this manual are installed using the project generator as you work through the tutorials. The tutorial examples in this manual assume that installation procedures described in the RSK Quick Start Guide have been completed. Please refer to the Quick Start Guide for details of preparing the configuration.

Some of the illustrative screenshots in this document will show text in the form RL78XXX. These are general screenshots and are applicable across the whole RL78 family. In this case, simply substitute for RL78XXX RL78/L13.

These tutorials are designed to show you how to use the RSK and are not intended as a comprehensive introduction to the e²studio debugger, compiler toolchains or the E1 emulator. Please refer to the relevant user manuals for more in-depth information.

2.1 Note Regarding Source Code

Due to the project generator, it is possible that line numbers for source code illustrated in this document do not match exactly with that in the actual source files. It is also possible that the source address of instructions illustrated in this manual differ from those in user code compiled from the same source. These differences are minor, and do not affect the functionality of the sample code nor the validity of this manual.

2.2 Application Leading Tool (Applilet)

Applilet for RL78/L13 has been used to generate the sample code discussed in this document. Applilet is a Windows GUI tool for generating template 'C' source code and project settings for the RL78/L13. When using Applilet, the engineer is able to configure various MCU features and operating parameters using intuitive GUI controls, thereby bypassing the need in most cases to refer to sections of the Hardware Manual.

Once the engineer has configured the project, the 'Generate Code' function is used to generate three code modules for each specific MCU feature selected. These code modules are name 'r_cg_XXX.h', 'r_cg_XXX.c', and 'r_cg_XXX_user.c', where 'XXX' is a three letter acronym for the relevant MCU feature, for example 'adc'. Within these code modules, the engineer is then free to add custom code to meet their specific requirement. Custom code should be added, whenever possible, in between the following comment delimiters:

```
/* Start user code for adding. Do not edit comment generated here */  
/* End user code. Do not edit comment generated here */
```

Applilet will locate these comment delimiters, and preserve any custom code inside the delimiters on subsequent code generation operations. This is useful if, after adding custom code, the engineer needs to re-visit Applilet to change any MCU operating parameters.

Applilet is released with this RSK and is available via a web download at:

http://www.renesas.com/applilet_download


3. Tutorial Project Workspace

3.1 Introduction


e²studio is an integrated development tool that allows the user to write, compile, program and debug a software project on the RX, 78K, RL and V850 family of Renesas microcontrollers. e²studio will have been installed during the installation of the software support for the Renesas Starter Kit product. This manual will describe the stages required to create and debug the supplied tutorial code.

3.2 Starting e²studio and Importing Sample Code



- Start e²studio by selecting it from the Start Menu. The first dialog box to appear will be the Workspace Launcher.
- Click 'Browse' and select a suitable location to store your workspace, using the 'Create New Folder' option as necessary. Click 'OK'.

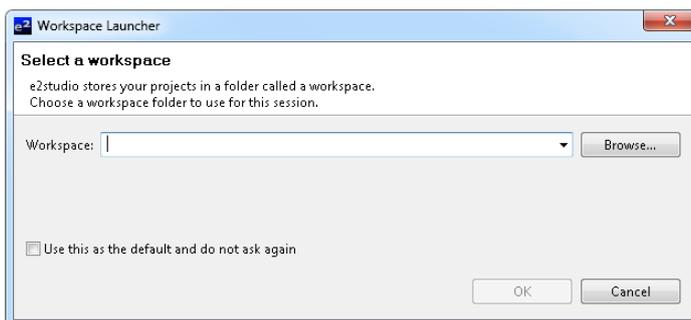

- Click 'Yes' when presented with the 'Administrator Privilege' dialog box

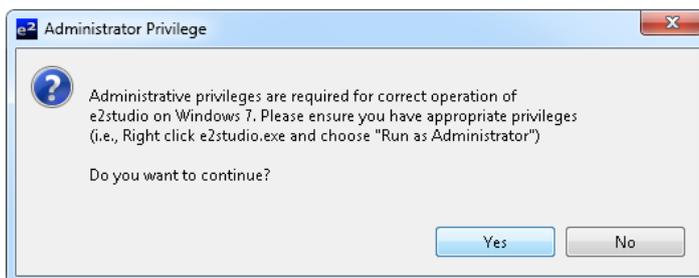


- In the Toolchain registry dialog. Select Renesas Toolchains. GNURL78 v13.02-ELF. Click on Register. A dialog will appear "Selected Toolchains were successfully integrated with e²studio". Click OK.

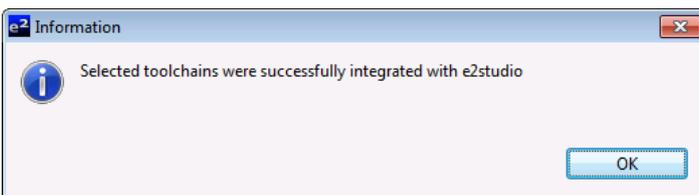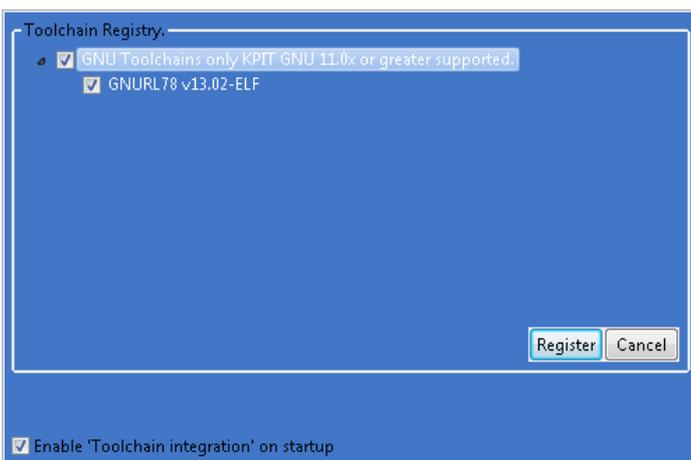


- The e²studio welcome splash screen will appear. Click the 'Go to the workbench' arrow button on the far right (circled in the screenshot opposite).



- Once the environment has initialised, right click in the 'Project Explorer' window and select 'Import...'

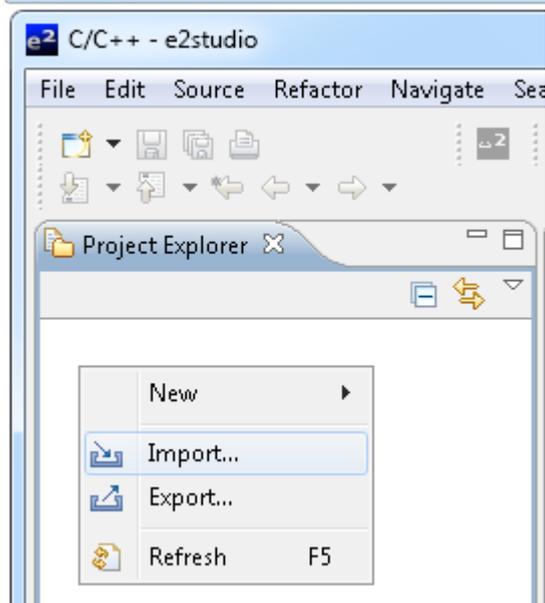


- The Import dialog box will now show. Expand the 'General' folder icon, and select 'Existing Projects into Workspace', then click 'Next'.

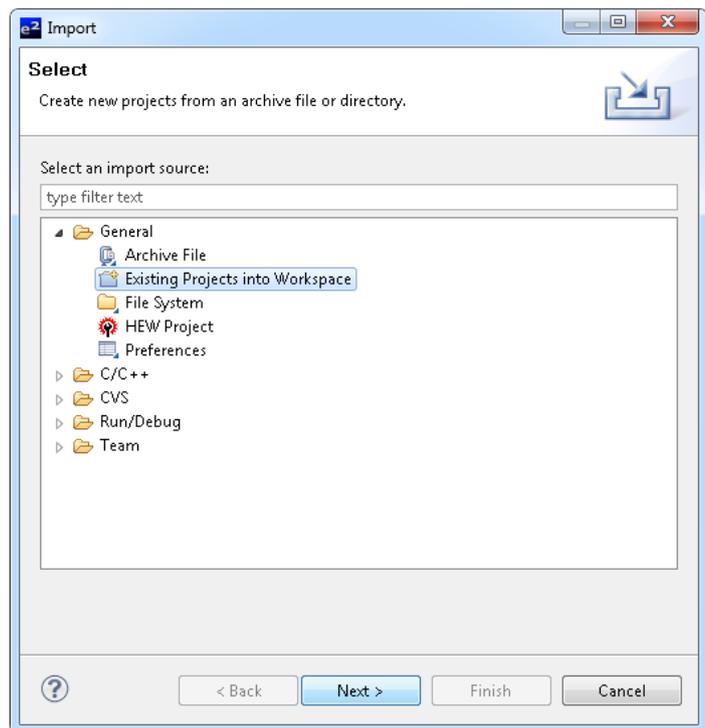

- The Import dialog box will allow you to specify a project to import. Click the 'Browse' button and locate the following directory:

C:\Renesas\Workspace\RSK\RSKRL78L13

- Ensure that the 'Copy projects into workspace' option is ticked, and then click 'Finish'.

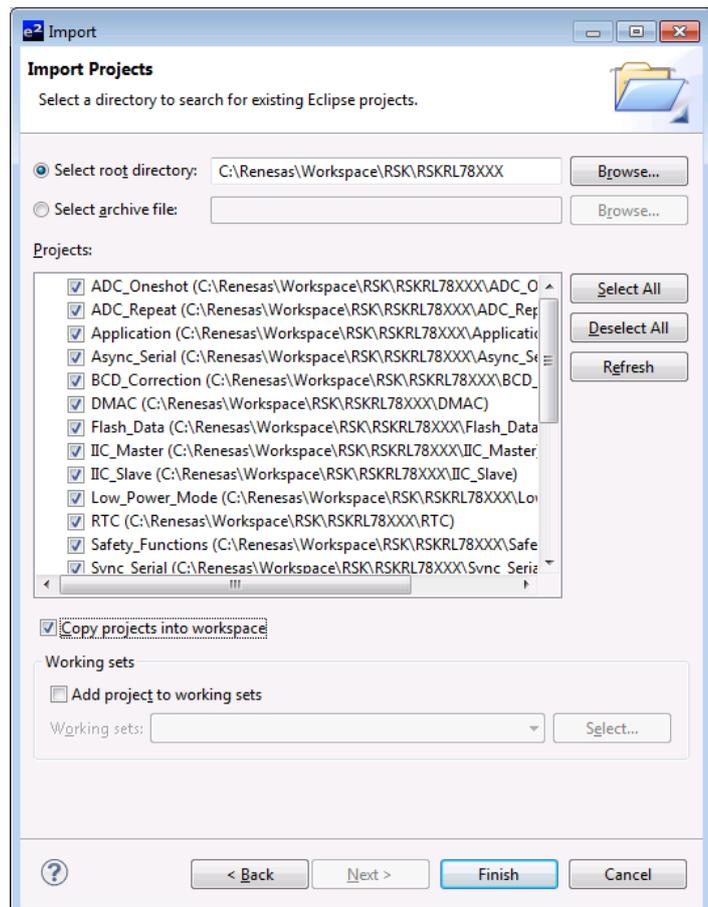

- Click on Tutorial from the list of projects in the 'Project Explorer' on the left-hand side.
 - ▶ Timer_Capture
 - ▶ Timer_Event
 - ▶ Tutorial

3.3 Build Configurations and Debug Sessions

3.3.1 Build Configuration

The e²studio workspace will be created with two build configurations: 'HardwareDebug' and 'Release'.


Release

This build mode has optimisation turned on, and provides little debug information. The C code execution may appear to be out of order, due to the way compiler optimises the code. This build configuration is intended for final ROM-programmable code.

HardwareDebug

This build mode has all optimisation turned off, and provides full debug information. This is the best configuration to use whilst developing code as C code execution will be linear.


- Click the top level 'Tutorial' folder again, and then the arrow next to the build button (hammer icon), and select the 'HardwareDebug' option.

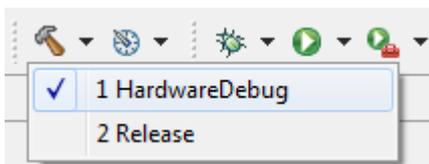


- e²studio will now build the code.

3.3.2 Debug Configuration

- Click the arrow next to the debug button (bug icon). Select 'Debug Configurations'.

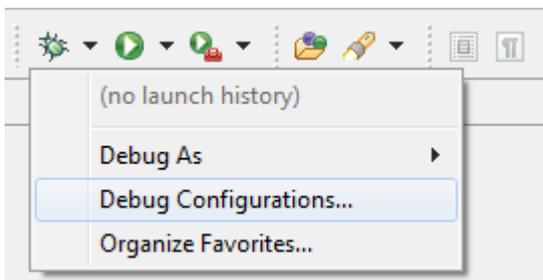


- The 'Debug Configurations' dialog box will appear. Click the small arrow next to the 'Renesas GDB Hardware Debugging' option.
- The debug configurations for each project will appear. Select the entry for the tutorial project.

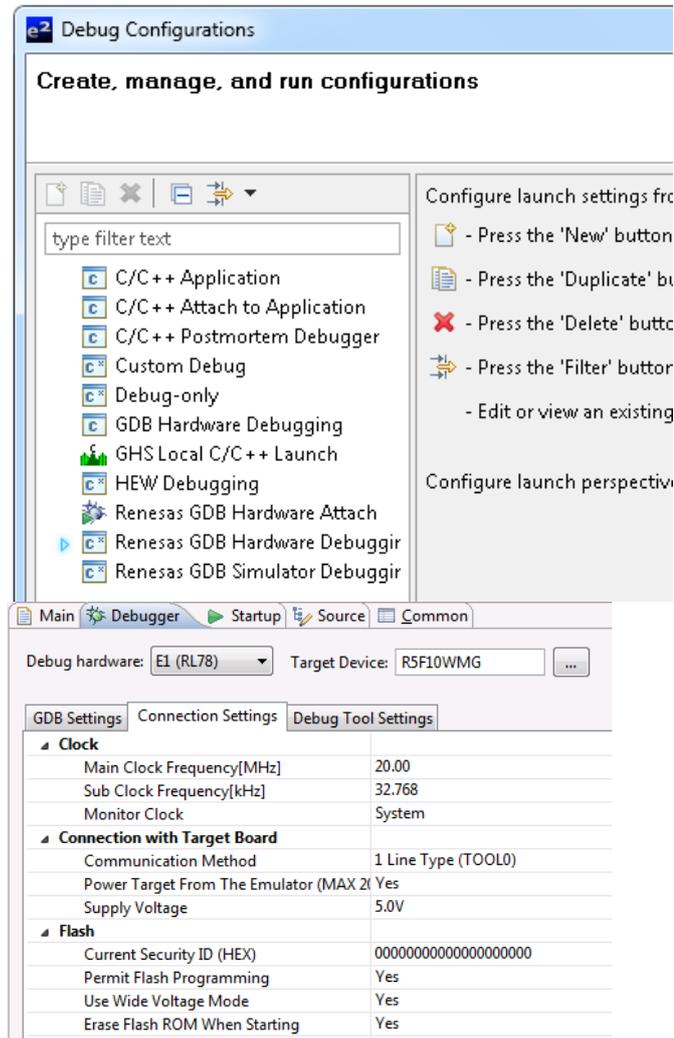


- The debug configurations control page will then show for the tutorial project. Change the main tab to 'Debugger' and then select 'Connection Settings' on the secondary tab bar that appears.
- There is no need to change the debugger settings as they are preconfigured with the tutorial project, however if you intend to use an external power supply, set the 'Power Target From The Emulator' option to No (drop-down menu).
- Refer to the RSKRL78L13 User's Manual for details of power supply configuration.

Note: e²studio will display a warning if you attempt to connect with an incorrect power supply setting.


- Click the 'Debug' button to continue. e²studio will now connect to the debugger and download the code to the target.
- After downloading the code a dialog box will appear asking if you would like to switch to the 'Renesas Debug perspective'. Click 'Remember my decision' to prevent this dialog box from appearing in future, then click 'Yes'
- e²studio will load the new perspective, which is optimised for debugging.

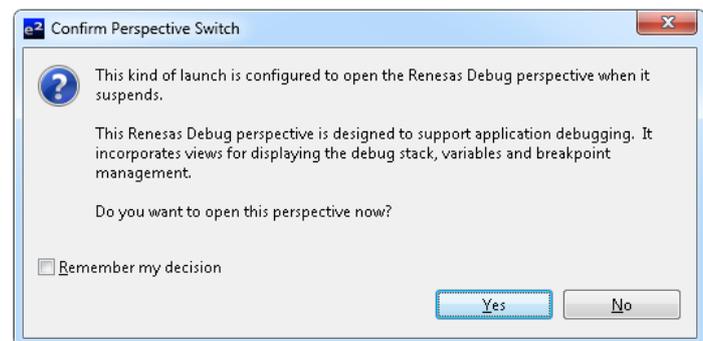

- To change back to the default 'C/C++' perspective, from the menu bar select Window > Open Perspective > Other
- The 'Open Perspective' dialog box will appear. Click on the desired perspective to select it then 'OK'.

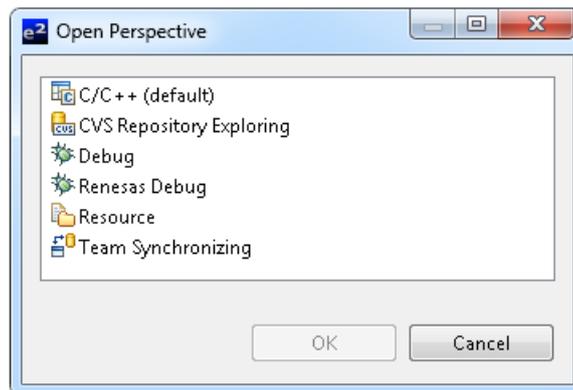

- Alternatively, click on the button with the double arrow in the top right corner of the screen, as shown opposite, and select the 'C/C++' option that appears.

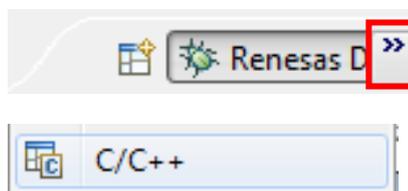

3.4 Running the Tutorial

- Refer to the Description.txt file for instructions on how to configure the RSK and run the sample code.
- Once the code has been downloaded, click 'Resume' to run the code to the main function. The main function is set as the program entry point by default. The program counter will stop on the first instruction in the main function.
- Click the 'Resume' button in the 'Renesas Debug' perspective to run the rest of the code
- It is recommended that you run the entire tutorial demo first, before continuing to debug it



4. Reviewing the Tutorial Program

This section will look at each section of the tutorial code and basic debugging functionality in e²studio.


4.1 Program Initialisation

Before the main program can run, the microcontroller must be configured. The following parts of the tutorial program are used exclusively for initialising the RSK device so that the main function can execute correctly. The initialisation code is run every time the device is reset via the reset switch or from a power cycle.

- After downloading the code, switch back to the C/C++ perspective and navigate to the Project Explorer window on the left-hand side.
- Expand the 'Tutorial' folder by clicking on the arrow next to the folder icon, as highlighted by the red circle.
- Click the arrow next to the 'src' folder to show the source files.
- Double click on 'r_cg_hardware_setup.c' to open the file.

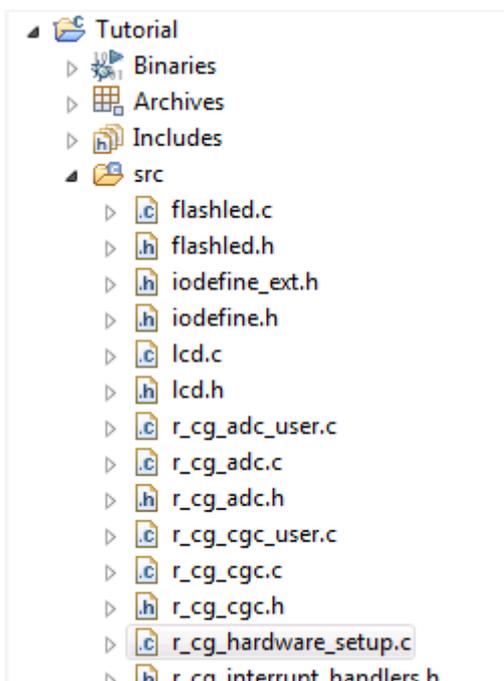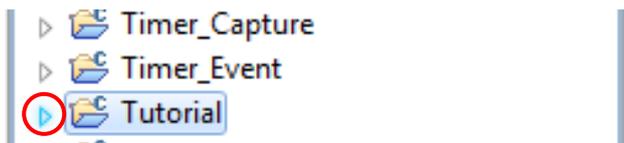

- Breakpoints can be set by double clicking at the left-hand edge of the source window. On the line with instruction R_Systeminit(), double click next to the vertical line to set a breakpoint.

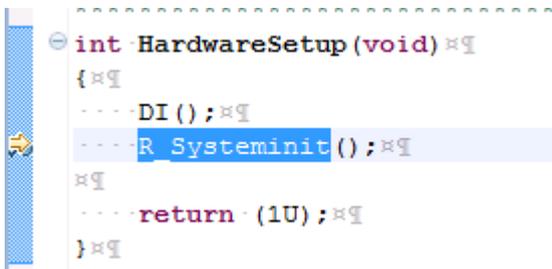

Note: As an alternative breakpoints may be set in the C/C++ perspective by selecting a line and using Run > Toggle Breakpoint.

- Click the 'Resume' button in the Renesas Debug perspective (or press [F8]) to run the code up to this breakpoint.



Note: The program counter is indicated by the blue arrow next to the breakpoint.

- Click the 'Step Into' button (or press [F5]), to step into the 'R_Systeminit' function.



- The 'R_Systeminit' function calls several initialisation functions which configure the MCU for normal operation. This includes input/output ports, and system clocks.
- The user can step through all the initialisation code by clicking the 'Step Into' icon and reading the code however for the purpose of this manual, it will be skipped.
- Click the 'Resume' button, to run the code up to the main function.



```
int HardwareSetup(void)
{
    ... DI();
    ... R_Systeminit();
    ...
    return (1U);
}
```

```
/* *****
 * Function Name: R_Systeminit
 * Description : This function initial:
 * Arguments : None
 * Return Value : None
 * *****
void R_Systeminit(void)
{
    PIOR = 0x00U;
    R_CGC_Get_ResetSource();
    R_PORT_Create();
    R_CGC_Create();
    R_TAU0_Create();
    R_ADC_Create();
    R_INTC_Create();
    R_KEY_Create();
    CRCOCTL = 0x00U;
    IAWCTL = 0x00U;
    PMS = 0x00U;
}
```

For further details regarding hardware configuration, please refer to the RSKRL78L13 User's Manual and the RL78/L13 Group Hardware Manual.

4.2 Main Functions

This section will look at the program code called from with the main() function, and how it works.

- Click on the line containing the 'flash_lcd()' function call in 'main()' to position the cursor. Right-click and select 'Run to Line' to execute the program up to this line. The 'Init_Display_Panel()' function call enables and configures the LCD panel, and 'Display_Panel_String()' will write "RL78" on the bottom line.

```

90 void main(void)
91 {
92     R_MAIN_UserInit();
93     /* Start user code. Do not edit comment generated here */
94
95     /* Enable and configure LCD display. */
96     Init_Display_Panel();
97
98     /* Initialise the switch module */
99     Switch_Init();
100
101     /* Display the device family name on LCD.*/
102     Display_Panel_String(PANEL_LCD_LINE1, " RL78");
103
104     /* Flash all available LCD segments */
105     flash_lcd();
106
107     /* Begins the ADC-varying flash sequence */
108     Timer_ADC();
109
110     /* Demonstration of initialised variables.*/
111     static_test();
112

```

- Set a breakpoint on the 'Timer_ADC()' function call by double-clicking in the breakpoint column.
- Click the 'Step Into' button to step into the 'flash_lcd()' function. 

```

104     /* Flash all available LCD segments */
105     flash_lcd();
106
107     /* Begins the ADC-varying flash sequence */
108     Timer_ADC();
109
110     /* Demonstration of initialised variables.*/

```

- Click the 'Resume' button to resume program execution.
- The program will now run the flash_lcd() function. This function periodically polls the user switches and flashes all the LCD segments 200 times or until a user switch has been pressed.

```

220 static void flash_lcd(void)
221 {
222     /* Declare loop count variables */
223     volatile uint8_t flash_count = 0;
224
225     /* Turn off all segments */
226     LCD_DISPLAY_OFF();
227
228     /* Flash the LCD segs for 200 times or until a user switch is pressed. */
229     while ((0 == g_switch_flag) && (flash_count++ < 200))
230     {
231         uint16_t ms;
232
233         /* Toggles the LCD segments */
234         toggle_lcd();
235
236         /* LCD flashing Delay */
237         for (ms = 0; ms < 500; ms++)
238         {
239             R_TAU_MsDelay(1);
240
241             /* poll for SW2 -- not on interrupt */
242             if (TRUE == Switch2_Poll(SWITCHHOLD_2))
243             {
244                 g_switch_flag |= SWITCHHOLD_2;
245                 break;
246             }
247         }
248     }
249
250     /* Reset the flag variable */
251     g_switch_flag = 0;
252 }

```

- The program counter should come to a halt at the Timer_ADC() function.
- Step over the function by clicking the 'Step Over' button. Alternatively, press [F6].



```


104 ... /* Flash all available LCD segments */
105 ... flash_lcd();
106 ...
107 ... /* Begins the ADC-varying flash sequence */
108 ... Timer_ADC();
109 ...

```

The Timer_ADC() function starts a continuous A/D conversion and a periodic timer whose period is up-dated with the ADC result.

This timer is used to flash the LEDs at a variable rate.

- Open the 'r_cg_tau_user.c' file (using the Project Explorer, on the right-hand side).

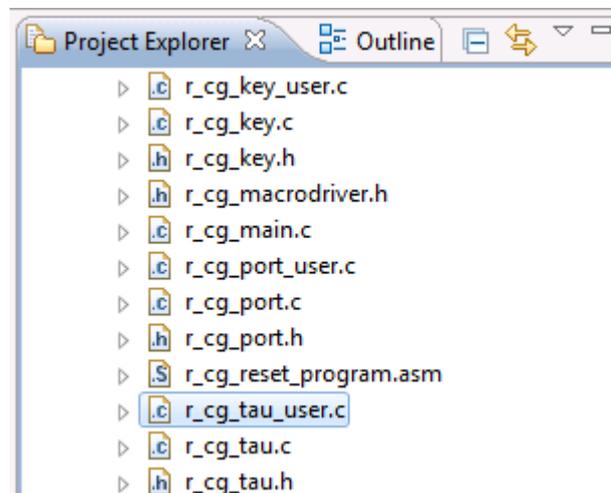

- Set a breakpoint on the first line of code inside the 'r_tau0_channel2_interrupt()' interrupt handler.
- Continue to execute the program by clicking the 'Resume' button.

```

108 void r_tau0_channel2_interrupt(void)
109 {
110 ... /* Start user code. Do not edit comment generated here */
111 ...
112 ... /* Toggle the heart symbol */
113 ... Toggle_Symbol();
114 ...

```

- The program will halt at the breakpoint due to the timer's period elapsing.
- Remove the breakpoint by double-clicking on the breakpoint column.

```

108 void r_tau0_channel2_interrupt(void)
109 {
110 ... /* Start user code. Do not edit com
111 ...
112 ... /* Toggle the heart symbol */
113 ... Toggle_Symbol();
114 ...

```

- Press [F8] to resume program execution.
- Observe the string on the bottom line of the LCD panel change one character at a time from 'RL78' to 'L13' as the 'static_test' function is executed.
- After all characters have been changed, the LCD panel's second line will return to displaying 'RL78'.

```

/*****
 * Function Name : static_test
 * Description   : Displays an initialised string, then modifies it, a character at
 *                 a time. Finally RL78 is displayed.
 * Arguments    : None
 * Return value  : None
 *****/
static void static_test (void)
{
    /* Declare loop count variable */
    uint8_t count = 0u;

    /* Turn off all LCD segments */
    LCD_DISPLAY_OFF();

    /* Delay */
    R_TAU_MsDelay(1000);

    /* Begin for loop which writes one letter of gConstStr to the LCD at a time.
     * The nested while loops generate the delay between each letter change */
    for (count = 0u; count < STRING_SIZE; count++)
    {
        /* Copy the bytes from gConstStr to gReplaceStr one byte at a time */
        g_replace_str[count] = g_const_str[count];

        /* Display the updated string on the LCD.
         * Casting to ensure use of correct data type. */
        Display_Panel_String(PANEL_LCD_LINE1, g_replace_str);

        /* Delay */
        R_TAU_MsDelay(1000);
    }

    /* RL78 family name is displayed on the LCD */
    Display_Panel_String(PANEL_LCD_LINE1, "RL78");
}
/*****
End of function static_test
*****/

```

- Press the 'Suspend' button to halt program execution.
- This is the extent of the tutorial code.




For further details regarding hardware configuration, please refer to the RSKRL78L13 User's Manual and the RL78/L13 Group Hardware Manual.

The E1 emulator features advanced logic-based event point trigger system, and full instruction on its use is outside the scope of this tutorial. For further details, please refer to the E1 Emulator User's Manual

5. Additional Information

Technical Support

For details on how to use e²studio, refer to the help file by opening e²studio, then selecting Help > Help Contents from the menu bar.

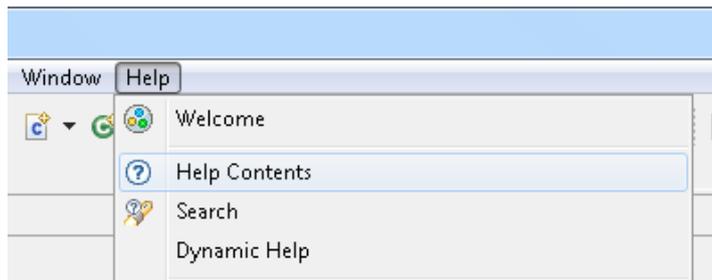

For information about the RL78/L13 series microcontrollers refer to the RL78/L13 Group Hardware Manual.

For information about the RL78 assembly language, refer to the RL78 Series Software Manual.

Technical Contact Details

Please refer to the contact details listed in section 9 of the “Quick Start Guide”

General information on Renesas microcontrollers can be found on the Renesas website at:

<http://www.renesas.com/>

Trademarks

All brand or product names used in this manual are trademarks or registered trademarks of their respective companies or organisations.

Copyright

This document may be, wholly or partially, subject to change without notice. All rights reserved. Duplication of this document, either in whole or part is prohibited without the written permission of Renesas Electronics Europe Limited.

© 2013 Renesas Electronics Europe Limited. All rights reserved.

© 2013 Renesas Electronics Corporation. All rights reserved.

© 2013 Renesas Solutions Corp. All rights reserved.

REVISION HISTORY	RSK RL78L13 Tutorial Manual
------------------	-----------------------------

Rev.	Date	Description	
		Page	Summary
1.00	Oct 10, 2013	—	First Edition issued

Renesas Starter Kit Manual: Tutorial Manual

Publication Date: Rev. 1.00 Oct 10, 2013

Published by: Renesas Electronics Corporation



Renesas Electronics Corporation

<http://www.renesas.com>

SALES OFFICES

Refer to "<http://www.renesas.com>" for the latest and detailed information.

Renesas Electronics America Inc.

2880 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A.
Tel: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited

1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada
Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited

Dukes Meadow, Millboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K.
Tel: +44-1628-651-700, Fax: +44-1628-651-804

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany
Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.

7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-8235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.

Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited

Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2886-9318, Fax: +852 2886-9022/9044

Renesas Electronics Taiwan Co., Ltd.

13F, No. 363, Fu Shing North Road, Taipei, Taiwan
Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd.

80 Bendemeer Road, Unit #06-02 Hyflux Innovation Centre Singapore 339949
Tel: +65-6213-0200, Fax: +65-6213-0300

Renesas Electronics Malaysia Sdn.Bhd.

Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd.

11F., Samik Lavied' or Bldg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea
Tel: +82-2-558-3737, Fax: +82-2-558-5141

RL78/L13 Group