

GP Batteries

Product Specifications

Model No.:GP15AUP

Document Number: AUP003

Revision:00

Page 1 of 5

1. APPLICABILITY

This specification is applicable to GP Ultra Plus Alkaline Cell, GP15AUP(No mercury added).

2. GENERAL

- 2.1 Type designation : LR6 (IEC/JIS), 15A (ANSI)
- 2.2 Nominal voltage : 1.5V
- 2.3 Shape and dimension : Refer to Drawing 1.
- 2.4 Typical weight : 24.5g
- 2.5 Warranty period : 36 months
- 2.6 Jacket : Foil jacket

3. APPEARANCE

There shall be no dirt, scratch or deformation detrimental to practical service in appearance.

4. CELL VOLTAGE

4.1 Test method

- Method of sampling : MIL-STD-105E level II single sampling normal inspection.
- Voltmeter : Digital Voltmeter (DVM) with the precision of 1mV (internal resistance not less than 1 Megohm)
- Test temperature : 20±2°C

4.2 Off Load Voltage

At shipping	12 months after manufactured
1.50-1.60V	1.50-1.57V

4.3 On Load Voltage

Initial	12 months after manufactured
Above 1.40V	Above 1.37V

Load resistance : 3.9 ohm ± 0.5% (measure time : 0.3 seconds)

GP Batteries

Product Specifications

Model No.: GP15AUP

Document Number: AUP003

Revision:00

Page 2 of 5

5. SERVICE OUTPUT

5.1 Test method

- (1) The resistance of external discharge circuit shall be as specified plus or minus 0.5%.
- (2) The duration of discharge time periods shall be as specified plus or minus 1%.
- (3) Storage shall be at $20\pm 2^{\circ}\text{C}$, $65\pm 20\%\text{RH}$ and discharge tests shall be at $20\pm 2^{\circ}\text{C}$, $65\pm 20\%\text{RH}$.

5.2 Service Life


	Test Mode	Application	Standard	Initial (Nominal)	Initial (Minimum)	12 months storage at 20°C (Nominal)
Service life at $20\pm 2^{\circ}\text{C}$	43 Ω 4H/D (EPV=0.9V)	Transistor radios	IEC/ANSI	94H	88H	92H
	3.9 Ω 1H/D (EPV=0.8V)	Motor/toy	IEC/ANSI	8.3H	7.4H	7.8H
	10 Ω 1H/D (EPV=0.9V)	Tape recorders	IEC/ANSI	20.0H	18.8H	19.5H
	24 Ω 15s/M, 8h/D (EPV=0.9V)	Remote control	IEC	48H	43H	45H
	250mA 1H/D (EDV:0.9V)	Electronic Games, Compact Disks & Mini Disks	ANSI	8.3H	7.5H	7.6H
	1000mA 10s on, 50s off 1H/D (EPV=0.9V)	Photo flash	IEC/ANSI	470 cycles	380 cycles	410 cycles
	1.5W/0.65W, 2s/28s, 5m/h (EPV=1.05V)	Digital Camera	IEC/ANSI	76 cycles	55 cycles	50 cycles
	1000mA 24H/D (EPV=1.0V)	Reference test		57M	40M	45M
	10 Ω continuous (EPV=0.9V)	Reference test		20.2H	18.6H	19.7H

s: second M: minute H: hour D: day EPV: end point voltage

*The initial discharge test shall commence within 30 days of manufacture. During this period, the cells shall be stored under room temperature conditions.
($20\pm 2^{\circ}\text{C}$ and $65\pm 20\%$ relative humidity)

5.3 Operating temperature: -20°C to 54°C ($65\pm 20\%\text{RH}$)

5.4 Storage temperature: -30°C to 45°C ($65\pm 20\%\text{RH}$)



Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.

GP Batteries

Product Specifications

Model No.:GP15AUP

Document Number: AUP003

Revision:00

Page 3 of 5

6. ELECTROLYTE LEAKAGE

6.1 Leakage on arrival at warehouse.

Check with naked eye.

6.2 Leakage at room temperature

After storing for 12 months at $20\pm 15^{\circ}\text{C}$, $65\pm 20\%\text{RH}$, check with naked eye.

6.3 Leakage at high temperature

Within thirty days of manufacture, the cell shall be stored for 30 days at $45\pm 2^{\circ}\text{C}$ and below 70% relative humidity, check with naked eye.

6.4 Leakage of over discharge

After loading with 10 Ohm continuously down to 0.6V at $20\pm 2^{\circ}\text{C}$, $65\pm 20\%\text{RH}$, check with naked eye.

7. QUALITY ASSURANCE

DESCRIPTION	SAMPLING PLAN
Battery dimensions	0.65% (Note 5)
Appearance	1.0% (Note 5)
Off load voltage	0.65% (Note 5)
On load voltage	1.0% (Note 5)
Service output	Note 1 (Note 5)
Leakage 6.1	0.65% (Note 2 & 5)
6.2	Note 3
6.3	Note 4
6.4	Note 4

Note 1 : Acceptance / rejection in accordance with IEC publication (1993) 86-1, Sub-clause 8.8.

- 1) Test nine batteries.
- 2) Calculate the average without the exclusion of any result.
- 3) If this average is equal to or greater than the specified figure and no more than one battery has a service output of less than 60% of the specified figure, the batteries are considered to conform for service output.
- 4) If this average is less than the specified figure and/or more than one battery has a service output of less than 60% of the specified figure, repeat the test on another sample of nine batteries and calculate the average as previously.
- 5) If the average of this second test is equal to or greater than the specified figure and no more than one battery has a service output of less than 60% of the specified figure, the batteries are considered to conform for service output.
- 6) If the average of second test is less than the specified figure and/or more than one battery has a service output of less than 60% of the specified figure, the batteries are considered not to conform and no further testing is permitted.

Note 2: Leakage on arrival at warehouse is within two months after shipping.

GP Batteries

Product Specifications

Model No.:GP15AUP

Document Number: AUP003

Revision:00

Page 4 of 5

- Note 3: Sample size : n=20
Judgement : Ac=1 Re=2
- Note 4: Sample size :n=20
Judgement :Ac=0, Re=1
- Note 5: AQL General Inspection level II, single sampling plan.

8. PACKAGING

Packaging shall be a form agreed by both parties.

Precaution & Handling

1. Do not attempt to take batteries apart or subject them to pressure or impact. Heat may be generated or fire may result. The alkaline electrolyte is harmful to eyes and skin, and it may damage clothing upon contact.
2. Keep away from children. If swallowed, contact a physician at once.
3. Do not mix GP batteries with other battery brands or batteries of a different chemistry such as alkaline and zinc carbon.
4. Do not short circuit batteries, permanent damage to batteries may result.
5. Do not incinerate or mutilate batteries, may burst or release toxic material.
6. Do not solder directly to cells or batteries.
7. Store batteries in a cool dry place.
8. If find any noise, excessive temperature or leakage from a battery, please stop its use.
9. When not using a battery, disconnect it from the device.
10. Do not mix new batteries in use with semi-used batteries.
11. When find battery power down during use, please switch off the device and take batteries out.
12. Never put a battery into water or seawater.
13. Do not recharge batteries.

Storage

1. Store in a cool, dry place before use.
2. Do not keep batteries at temperature of 45°C or above.
3. Do not keep batteries at relative humidity of 75% or above.

GP Batteries

Product Specifications


Model No.:GP15AUP

Document Number: AUP003

Revision:00

Page 5 of 5

Drawing 1

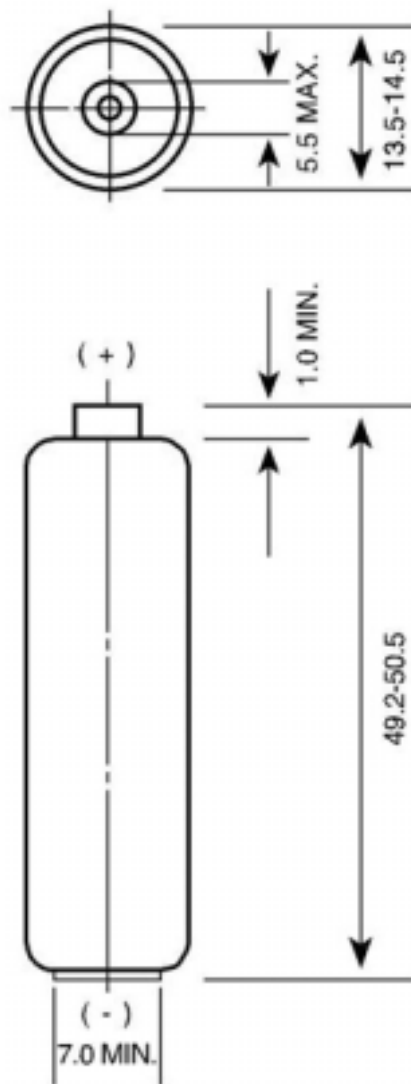

Unit: mm