

CONTOUR

FRAME
+ WRAP-AROUND
+ NON-SLIP BRIDGE
+ SPORTIVE DESIGN
+ LIGHTWEIGHT



TEMPLES
+ NON-SLIP TIPGRIP TEMPLES

LENS
+ PLATINUM® ASAF COATING

VERSIONS



SMOKE
#PSSCONT443B

CSP
#PSSCONT13B


21 g

+ MICROFIBER POUCH INCLUDED


DESCRIPTION

21 g of strength: sturdy, protective, stylish, comfortable and lightweight. CONTOUR is the most extreme everyday sun and safety protection eyewear.

TECHNOLOGIES

PLATINUM® (P) ASAF Coating
Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® is resistant to the most aggressive chemicals.

CSP
This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments. CSP is also combined with the exclusive PLATINUM® coating that sustainably combats fogging.

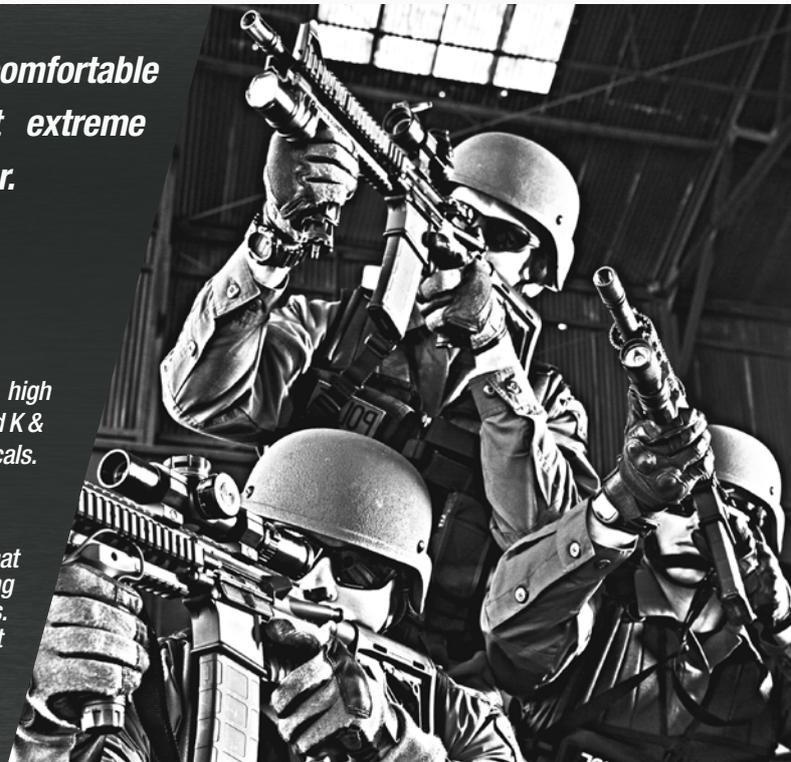

CONTOUR

MODEL	VERSIONS	REFERENCES	LENS MARKING	FRAME MARKING	V50 BALISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATINGS
CONTOUR	 Smoke	PSSCONT443B	 I3	AS/NZS 1337.1	781.2 km/h - 217.8 m/s	ANSI Z87+ MIL-PRF-32432A	Anti-scratch/anti-fog 
	 CSP	PSSCONT13B	 I1	AS/NZS 1337.1	788.4 km/h - 219.1 m/s	ANSI Z87+ MIL-PRF-32432A	Anti-scratch/anti-fog 

Lens markings

 Platinum is a permanent coating applied on both sides of the lens that gives a high resistance to scratching (1.4 cd / m²) and to the most aggressive chemicals and delays the onset of fogging for two minutes, as per the testing requirements of EN166.

I. The letter 'I' signifies 'Medium Impact' approval.

O. The letter 'O' signifies that the product has been approved for the use both outdoors and indoors, and the terminology used by Australian standards is 'outdoor un-tinted'. This marking appears on all clear, amber and contrast lenses.

Ocular lens category:

- 0. Range of luminous transmittance 80-100%
- 1. Range of luminous transmittance 43 -88%
- 2. Range of luminous transmittance 18-43%
- 3. Range of luminous transmittance 8 -18%

Others symbols:

 Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

AS/NZS 1337.1:2010 Tested and approved to AS/NZS 1337.1.2010 for medium impact protection. Resists a 6mm ball at 45 m/s.

Others symbols:

CE European standard  Manufacturer name

	PSSCONT443B	PSSCONT13B
EAN13 Unit pack	3 660 740 012 533	3 660 740 012 540
EAN13 Carton (number of unit per master pack)	3 660 740 212 537 (100 units)	3 660 740 212 544 (100 units)

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.
Storage: All products must be stored in a dry and clean environment.*

CONTOUR	
LENSES	PC - 2.2 mm - Curve 8
FRAME	PC
TEMPLES	Nylon + TPE
STRAP	Not applicable
FOAM	Not applicable
Country of origin	Taiwan

For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA