PRODUCT DATA SHEET

Part Number: 1900X35X

Type	Size	Rating	Description
LED	M6	24Vdc	LED Flat Panel Indicator

Dimensions (mm)

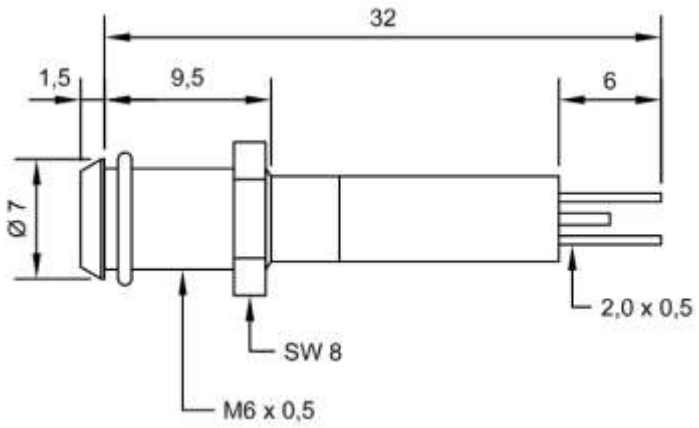

Part #	Colour	Current (mA)	Intensity (mcd)
1900X350	Red	15	2
1900X353	Super-Red	15	7
1900X351	Green	15	6
1900X352	Yellow	15	6

Notes:

1 X=Bezel chrome finish. 0=satin, 1=black, 2=matt
2 Electrical & optical data are measured at an ambient temperature of 25ºC
3 Luminous intensity at DC
4 Storage temperature -25 ºC to +80ºC
5 Application temperature -20 ºC to +60ºC
6 Due to component tolerances, colour temperature variations may be observed
7 Ingress rating IP40
8 RoHS & REACH SVHC compliant

CML Innovative Technologies Ltd • 69-70 Eastern Way • Bury St Edmunds • Suffolk • IP32 7AB • England
Tel: +44 (0) 1284 714700 • Fax: +44 (0) 1284 724850 • www.cml-it.com
Registered Office: Eastern Way, Bury St Edmunds – Registration No. 265006 England