

1607278

https://www.phoenixcontact.com/gb/products/1607278

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Coupler connector, straight, Screw locking mechanism, M23, number of positions: 12, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 5 mm . .. 13.2 mm, number of positions: 12, connection method: Crimp connection, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242262

Commercial data

Item number	1607278		
Packing unit	20 pc		
Minimum order quantity	20 pc		
Note	Made to order (non-returnable)		
Sales key	ABRAGG		
Product key	ABRAGG		
Catalog page	Page 78 (PC-2011)		
GTIN	4046356174688		
Weight per piece (including packing)	98.205 g		
Weight per piece (excluding packing)	93.697 g		
Customs tariff number	85366990		
Country of origin	DE		



1607278

https://www.phoenixcontact.com/gb/products/1607278

Technical data

Notes

Order information:	Order crimp contacts Ø 1 mm separately
Product properties	

Product type	Circular connector (cable-side)	
Series	RF	
Application	Feedback, signal	
	Signal	
Number of positions	12	
Connection profile	12	
Shielded	yes	
Coding	N	
Thread type	M23	

Material specifications

Seal material	FPM	
Housing material	Metal	
Housing material	Turned parts: copper zinc alloy (CuZn), die-cast parts: zinc (GD-Zn)	
Insulator material	PA 6.6	
Gasket and O-ring material	FPM	

Connection data

Conductor connection

Connection method	Crimp connection
-------------------	------------------

Electrical properties

Contact

Contact diameter	1 mm	
Max. current	8 A	
Nominal voltage U _N	48 V AC 74 V DC	
Overvoltage category	III	
Degree of pollution	3	
Rated surge voltage	1.5 kV	

Connector

Туре	straight
Direction of rotation	Standard

Cable/line

_		
	External cable diameter	5 mm 13.2 mm



1607278

https://www.phoenixcontact.com/gb/products/1607278

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67	
Ambient temperature (operation)	-40 °C 125 °C	
Altitude	2000 m	




https://www.phoenixcontact.com/gb/products/1607278




Drawings

Dimensional drawing

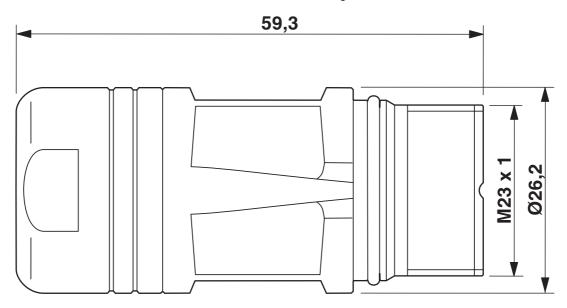

RF-12(17)...N8A90DU

Dimensional drawing

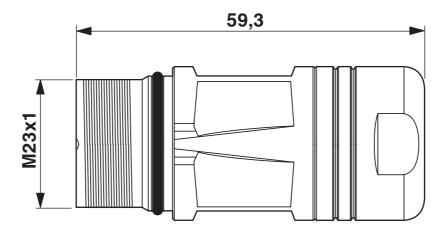


Dimensional drawing



https://www.phoenixcontact.com/gb/products/1607278



Schematic diagram

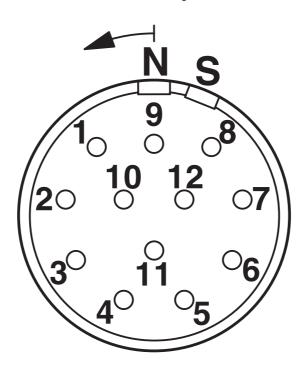

Connector pin assignment



1607278

https://www.phoenixcontact.com/gb/products/1607278

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/gb/products/1607278

CUL Recognized Approval ID: E153698-20090723				
	Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
	48 V	5 A	20	-

UL Recognized Approval ID: E153698-20090723					
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		48 V	5 A	20	-



1607278

https://www.phoenixcontact.com/gb/products/1607278

Classifications

	ECLASS-13.0	27440116
ETIM		
	ETIM 9.0	EC002635
UNSPSC		
	UNSPSC 21.0	39121400



1607278

https://www.phoenixcontact.com/gb/products/1607278

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	a6486874-dd4c-4b87-8d7b-98bb750bc5aa

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT Ltd Halesfield 13, Telford Shropshire, TF7 4PG 01952 681700 info@phoenixcontact.co.uk