



中国认可
国际互认
检测
TESTING
CNAS L4065



Report No.:
报告编号: JSDC20201216U01

TEST REPORT 检测报告

Product Name:
产品名称:

Rechargeable Lithium Ion Battery
可充电锂离子电池

Model and Parameters:
型号参数:

NTA3588 3.7V
2530mAh/9.36Wh(Rated)
2600mAh/9.62Wh(Typical)

Test Classification:
检测类别:

Commission test
委托检测

Issue Date:
签发日期:

2021.01.07

Tested by/测试

Guang Wei Li

Test Engineer

Reviewed by/审核

Chen Huang

Audit Engineer

Approved by/批准

Hongbin Xu

Approval Engineer

Guangzhou MCM Certification & Testing Co., Ltd.
广州邦禾检测技术有限公司



General Information 基本信息	
Application/申请单位:	
Applicant: 申请单位:	GP Batteries (Shenzhen) Company Limited 深圳金山电池有限公司
Address: 申请单位地址:	A-1 Building ,Haixiang Industrial Park, Lanzhu Road, Shenzhen Export Processing Zone, Pingshan, Shenzhen, China 深圳市坪山新区深圳出口加工区兰竹路海翔工业园 A-1 栋
Contact Information: 联系方式:	Tel: 0755-8959 5885-386 Fax: 0755-8959 5995 E-mail: xw_zhang@goldpeak.com.cn
General Information/基本信息:	
Product Name: 产品名称:	Rechargeable Lithium Ion Battery 可充电锂离子电池
Product Classification: 产品分类:	Rechargeable Lithium Ion Single-cell Battery 可充电锂离子单电芯电池
Trade Mark: 商标名称:	—
Model and Parameters : 型号参数:	NTA3588 3.7V 2530mAh/9.36Wh(Rated) 2600mAh/9.62Wh(Typical)
Manufacturer: 制造单位:	GP Batteries (Shenzhen) Company Limited 深圳金山电池有限公司
Address: 制造单位地址:	A-1 Building ,Haixiang Industrial Park, Lanzhu Road, Shenzhen Export Processing Zone, Pingshan, Shenzhen, China 深圳市坪山新区深圳出口加工区兰竹路海翔工业园 A-1 栋
Contact Information: 联系方式:	Tel: 0755-8959 5885-386 Fax: 0755-8959 5995 E-mail: xw_zhang@goldpeak.com.cn
Factory: 生产单位:	GP Batteries (Shenzhen) Company Limited 深圳金山电池有限公司
Address: 生产单位地址:	A-1 Building ,Haixiang Industrial Park, Lanzhu Road, Shenzhen Export Processing Zone, Pingshan, Shenzhen, China 深圳市坪山新区深圳出口加工区兰竹路海翔工业园 A-1 栋
Testing Laboratory/测试实验室:	
Laboratory: 测试单位:	Guangzhou MCM Certification & Testing Co., Ltd. 广州邦禾检测技术有限公司
Address: 测试单位地址:	1 F No.13, Zhong San Section, ShiGuang Road, Panyu District, Guangzhou City, Guangdong Province, China. 中国 广州市番禺区市广路钟三路段 13 号之一
Testing Location: 测试实验室地址:	As above 同上
Test Standard/测试标准:	
Standard: 测试标准:	UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书 试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.
Deviation Description: 偏差描述:	None

Product Information/产品信息:

This battery is constructed with single lithium-ion cell and has overcharge, over-discharge, over current and short-circuits proof circuit.

电池由 1 个电芯组成, 含有过充、过放、过流和短路的保护线路。

Label/标签:


Rechargeable Lithium Ion Battery
Model No.: NTA3588
Rated Capacity: 2530mAh / 9.36Wh
Typical Capacity: 2600mAh / 9.62Wh
Voltage: 3.7V
11NR19/66
Date Code: 0121
Made in China YU10600-18002
GP Batteries(Shenzhen) Company Limited

Technical Parameters/技术参数:

	Cell	Battery
Model 型号	ICR18650-26F	NTA3588
Nominal Capacity 额定容量(mAh)	2600	2530
Nominal Voltage 额定电压(V)	3.7	3.7
Nominal Charge Current 额定充电电流(mA)	1300	520
Nominal Discharge Current 额定放电电流(mA)	520	200
Maximum Charge Current 最大充电电流(mA)	2000	1300
Maximum Discharge Current 最大放电电流(mA)	5200	1000
Maximum Charge Voltage 最大充电电压(V)	4.20	4.20
Cut-Off Voltage 放电截至电压(V)	2.75	3.05

Remark/备注:

/

Test Conclusion 测试结论				
Clause 条款	Test item 测试项目	Sample No. 样品编号	Test Result 测试结论	Remark 备注
38.3.4.1	Altitude simulation 高度模拟	C1#~C10#	P	/
38.3.4.2	Thermal test 温度循环测试		P	/
38.3.4.3	Vibration 振动		P	/
38.3.4.4	Shock 冲击		P	/
38.3.4.5	External short circuit 外部短路		P	/
38.3.4.6	Impact 重物冲击	C11#~C20#	P	/
	Crush 挤压	/	N/A	/
38.3.4.7	Overcharge 过充电	C21#~C28#	P	/
38.3.4.8	Forced discharge 强制放电	C29#~C48#	P	/
Ambient Temperature: 20 ± 5°C 环境温度: Receipt Date: 2020.12.16 接收日期: Test Date: 2020.12.17– 2021.01.04 测试时间:				
Test Conclusion/测试结论: The Rechargeable Lithium Ion Batteries submitted by GP Batteries (Shenzhen) Company Limited have passed the test items of UNITED NATIONS' Recommendations on the Transport of Dangerous Goods, Manual of Test and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 由深圳金山电池有限公司送检的可充电锂离子电池符合联合国《关于危险品货物运输的建议书 试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3 的要求。  Seal: 检测专用章:				

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断

38.3.2	Scope 范围		P
	All cell types shall be subjected to tests T.1 to T.6 and T.8. 所有电芯类型应该进行 T.1 到 T.6 和 T.8		N/A
	All non-rechargeable battery types, including those composed of previously tested cells, shall be subjected to tests T.1 to T.5. 所有不可充电电池, 包括由测试合格的电芯组成的电池应该进行 T.1 到 T.5。		N/A
	All rechargeable battery types, including those composed of previously tested cells, shall be subjected to tests T.1 to T.5 and T.7. 所有可充电电池, 包括由测试合格的电芯组成的电池应该进行 T.1 到 T.5, 以及 T.7 的测试。		P
	In addition, rechargeable single cell batteries with overcharge protection shall be subjected to test T.7. 另外, 有过充保护的单电芯可充电电池应该进行 T.7 的测试。		P
	A component cell that is not transported separately from the battery it is part of needs only to be tested according to tests T.6 and T.8. 不单独运输的作为配件的电芯进行 T.6 和 T.8 的测试。		P
	A component cell that is transported separately from the battery it is part of needs only to be tested according to tests T.1 to T.6 and T.8. 单独运输的作为配件的电芯进行 T.1 到 T.6, 以及 T.8 的测试。		N/A
	A cell or battery that is an integral part of the equipment it is intended to power that is transported only when installed in the equipment may be in accordance with the applicable tests when installed in the equipment. 作为设备组成部分的用作设备电源的电芯或电池, 如果只能在设备中运输, 可按照装在设备中的适用测试要求进行试验		N/A
38.3.3(d)	Batteries or single cell batteries not equipment with battery overcharge protection that are design for use only as a component in another battery or in equipment, which affords such protection, are not subjected to the requirement of T.7. 未安装过充电保护装置、按设计要求只能在另一个带过充保护装置的电池组或设备中的电芯或单电芯电池, 无需 T.7 试验。		—
38.3.3(f)	When testing a battery assembly in which the aggregate lithium content of all anodes when fully charged, is not more than 500 g, or in the case of a lithium battery, with a Watt-hour rating of not more than 6 200Wh, that is assembled from batteries that have passed all applicable tests, one assembled battery in a fully charged state shall be tested under tests T3, T4 and T5, and in addition, test T7 in the case of a rechargeable battery. 当试验集成电池时, 如果集成电池在完全充电时所有阳极的合计锂含量不大于 500g, 或在锂离子电池组的情况下, 额定瓦特-小时不超过 6200Wh 时, 并且是用通过所有试验的电池集合而成的, 须对一个完全充电状态的集成电池做试验 T.3、T.4 和 T5, 另外, 如果是可充电电池, 则还需进行 T.7 试验。	Not battery assembly 非集成电池	N/A

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断
38.3.3(g)	When batteries that have passed all applicable tests are electrically connected to form battery in which the aggregate lithium content of all anodes, when fully charged more than 500g, or in the case of a lithium ion battery, with a Watt-hour rating of more than 6 200Wh, the assembled battery does not need to be tested if the assembled battery is of a type that has been verified as preventing: - Overcharge; - Short circuits; and - Over discharge between the batteries 对于已通过所有适用试验的若干电池组成的集成电池, 如在完全充电时所有阳极的总锂含量超过 500g, 或在锂离子电池的情况下, 如额定的瓦特-小时数超过 6200Wh 时, 当集成电池如经过验证属于可防止下列情况, 即无需进行试验: - 过充电; - 短路; 且 - 电池之间的过放	Not battery assembly 非集成电池	N/A
38.3.4	Procedure/程序		P
	Test T.1 to T.5 shall be conducted in sequence on the same cell or battery. 小型电芯或电池应按顺序进行试验 T.1 至 T.5。 Test T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. 试验 T.6 和 T.8 应使用未试验过的电芯或电池。 Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purpose of testing on cycled batteries. 试验 T.7 可以使用原先在试验 T.1 至 T.5 中使用过的未损坏电池进行。		P
38.3.4.1	Altitude Simulation/高度模拟		P
	Test samples shall be stored at a pressure of 11.6kPa or less for at least six hour at ambient temperature (20±5℃). 试验电芯和电池在环境温度(20±5℃)下, 储存在小于等于 11.6kPa 的压力下至少 6 小时。		P
	Results: no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%. 试验结果: 无泄漏、无排气、无解体、无破裂、无着火和开路电压降不低于 90%。	See the TABLE: 38.3.4.1	P
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		N/A
38.3.4.2	Thermal Test/温度试验		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断
	Test cells and batteries are to be stored for at least six hours at a test temperature equal to $72\pm 2^{\circ}\text{C}$, followed by storage for at least six hours at a test temperature equal to $-40\pm 2^{\circ}\text{C}$. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature ($20\pm 5^{\circ}\text{C}$). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours 将电芯和电池在温度为 $72\pm 2^{\circ}\text{C}$ 的条件下贮存不少于 6 个小时; 然后, 在温度 $-40\pm 2^{\circ}\text{C}$ 条件下贮存不少于 6 个小时; 两个温度间的间隔最长为 30min, 重复操作上述步骤到 10 次; 然后, 在环境温度为 $20\pm 5^{\circ}\text{C}$ 的条件下放置 24 个小时。 大电芯和大电池储存时间至少 12 个小时。	Stored for 6h at $72\pm 2^{\circ}\text{C}$ and $-40\pm 2^{\circ}\text{C}$ 在 $72\pm 2^{\circ}\text{C}$ 与 $-40\pm 2^{\circ}\text{C}$ 储存 6 个小时	P
	Results: no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%. 试验结果: 无泄漏、无排气、无解体、无破裂、无着火和开路电压降不低于 90%。	See the TABLE: 38.3.4.2	P
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		N/A
38.3.4.3	Vibration/振动		P
	-..... For cells and small batteries: from 7 Hz a peak acceleration of 1gn is maintained until 18 Hz reached. The amplitude is then maintained at 0.8mm (1.6mm total excursion) and the frequency increased until a peak acceleration of 8gn occurs (approximately 50Hz). A peak acceleration of 8gn is then maintained until the frequency is increased to 200Hz. 对于电芯和小电池: 保持峰值加速度 1gn, 从 7Hz 到 18Hz。然后振幅保持在 0.8mm (总偏移量为 1.6mm), 增加频率, 直到峰值加速度达到 8gn (约 50Hz)。然后保持 8gn 的峰值加速度, 直到频率增加到 200Hz。		P
	-..... For large batteries: from 7 Hz to a peak acceleration of 1gn is maintained until 18 Hz reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2gn occurs (approximately 25 Hz). A peak acceleration of 2gn is then maintained until the frequency is increased to 200 Hz. 对于大电池: 保持峰值加速度 1gn, 从 7Hz 到 18Hz。然后振幅保持在 0.8mm (总偏移量为 1.6mm), 增加频率, 直到峰值加速度达到 2gn (约 25Hz)。然后保持 2gn 的峰值加速度, 直到频率增加到 200Hz。		N/A
	Results: no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%. 试验结果: 无泄漏、无排气、无解体、无破裂、无着火和开路电压降不低于 90%。	See the TABLE: 38.3.4.3	P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		N/A
38.3.4.4	Shock/冲击		P
	- Each cell shall be subjected to a half-sine shock of peak acceleration of 150gn and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50gn and pulse duration of 11 milliseconds. 每一个电芯应承受峰值加速度为 150gn、脉宽为 6 毫秒的半正弦冲击。或者，大电芯可以按峰值加速度为 50gn、脉宽为 11 毫秒的半正弦冲击。		P
	- Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. 每个电池应承受的峰值加速度取决于电池的质量。小电池的脉宽应为 6 毫秒，大电池的脉宽应为 11 毫秒。		N/A
	Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks. 每一个电芯或电池在安装位置的 3 个垂直的轴向的正方向和负方向各进行 3 次冲击，总共 18 次。		P
	Results: no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%. 试验结果：无泄漏、无排气、无解体、无破裂、无着火和开路电压降不低于 90%。	See the TABLE: 38.3.4.4	P
	The requirement relating to voltage is not applicable to test cells and batteries at fully discharge states. 测试电压的要求不适用于完全放电的电芯和电池。		N/A
38.3.4.5	External Short Circuit/外部短路		P
	The cell or battery to be tested shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of 57±4°C, measured on the external case. 待测电芯或电池应加热一段时间，以稳定均衡在 57±4°C 的温度，并测量外壳上的温度。		P
	The exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. 小电芯或小电池的暴露/加热时间应至少为 6 小时，大电芯或大电池的暴露/加热时间应至少为 12 小时。		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断
	Then the cell or battery at $57 \pm 4^\circ\text{C}$ shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. 然后, 在 $57 \pm 4^\circ\text{C}$ 下的电芯或电池应经受一次短路, 外部线路总的电阻小于 0.1 欧姆。		P
	This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $57 \pm 4^\circ\text{C}$, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value. 在电芯或电池外部外壳温度恢复到 $57 \pm 4^\circ\text{C}$ 后, 短路状态继续持续至少一小时, 或对于大电池的情况下, 降至试验期间观察到的最大温升的一半, 并保持在该值以下。		P
	The short circuit and cooling down phases shall be conducted at least at ambient temperature. 短路和冷却阶段应至少在环境温度下进行。		P
	Results: external case temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test. 试验结果: 外部温度不超过 170°C , 试验期间和试验后 6 小时内, 无解体、破裂或起火现象。	See the TABLE: 38.3.4.5	P
38.3.4.6	Test T.6: Impact, Crush/重物冲击, 挤压		P
38.3.4.6.2	Impact/重物冲击		P
	Applicable to cylindrical cells not less than 18.0 mm in diameter. 适用于直径不小于 18.0 mm 的圆柱型电芯		—
	The test cell is placed on a flat smooth surface. A stainless steel bar (type 316 or equivalent) ($\varnothing 15.8 \text{ mm} \pm 0.1 \text{ mm}$, length: $\geq 60 \text{ mm}$ or of the longest dimension of the cell, whichever is greater) is placed across the centre of the test sample. 试验电芯放置平坦表面上。一根直径为 15.8 ± 0.1 毫米, 长度至少 6 厘米 (或该电芯的最大尺寸, 以较大者为准) 的 316 型不锈钢棒横放在样品的中心。		P
	A mass of $9.1 \text{ kg} \pm 0.1 \text{ kg}$ is dropped from a height of $61 \text{ cm} \pm 2.5 \text{ cm}$ at the intersection of the bar and the test sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. 一个重达 9.1 ± 0.1 千克的铁锤从 61 ± 2.5 厘米高处以几乎无摩擦和零拉力的姿态沿垂直轨道或通道跌落至不锈钢棒与样品的交结点上。		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断
	The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the steel bar lying across the centre of the test sample. Each sample is to be subjected to only a single impact 被撞击的测试样品的长轴平行于平面，并与横放在样品中心的不锈钢棒垂直，每只样品只经受一次撞击。		P
38.3.4.6.3	Crush/挤压		N/A
	Applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diameter 适用于棱柱形、袋形、硬币/纽扣式电池和直径小于 18.0 mm 的圆柱型电芯。		—
	A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5cm/s at the first point of contact. 在两个平面间对电芯或元件电芯进行挤压，挤压在第一个接触点的速度约为 1.5cm/s。		N/A
	The crushing is to be continued until the first of the three options below is reached. (a) The applied force reaches 13kN±0.78kN; (b) The voltage of the cell drops by at least 100 mV; or (c) The cell is deformed by 50% or more of its original thickness. Once the maximum pressure has been obtained, the voltage drops by 100mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released. 直到发生下述三个条件中的任一条件： (a) 作用力达到 13kN±0.78kN； (b) 电芯电压下降至少 100mV；或 (c) 电芯厚度和最初比较变形 50%以上。 一旦达到最大压力，电压降超过 100 mV 或者电芯变形至少 50%，压力应该解除。		N/A
	A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surface. For cylindrical cells, the crush force shall be applied perpendicular to longitudinal axis. 棱形或袋装电芯应该在宽面施加挤压力，纽扣/硬币电芯应该在平面施加挤压力。圆柱型电芯应该在长轴的垂直方向施加挤压力。		N/A
	Each test cell or component cell is to be subjected to one crushed only. The test sample shall be observed for a further 6h. The test shall be conducted using test cell or component cells that have not previously been subjected to others tests. 每一个测试的电芯或元件电芯只进行一次挤压，测试后再观察 6h。用于测试的电芯或元件电芯之前没有进行过其它的测试。		N/A
38.3.4.6.4	Result of Impact and Crush /重物冲击和挤压试验结果		P

UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.7, section 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC.10/11/Rev.7, section 38.3.			
Clause 条款	Requirement 要求	Result 结果	Verdict 判断
	Results: External temperature does not exceed 170°C and there is no disassembly and no fire during the test and within six hours after this test. 试验结果: 外部温度不超过 170°C, 试验期间和试验后 6 小时内, 无解体或起火现象。	See the TABLE: 38.3.4.6	P
38.3.4.7	Overcharge/过充电		P
	Applicable to rechargeable lithium cell/battery with overcharge protection. 适用于具有过充电保护功能的可充电锂电芯/电池。		—
	The charge current shall be twice the manufacturers' recommended maximum continuous charge current. 充电电流应为制造商推荐的最大持续充电电流的两倍。		P
	- When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V. 制造商建议的充电电压不大于 18 伏时, 实验的最小电压应是电池组最大充电电压的两倍或 22 伏两者中的较小者。		P
	- When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times maximum charge voltage. 制造商建议的充电电压大于 18 伏时, 实验的最小电压应是最大充电电压的 1.2 倍。		N/A
	Tests are to be at ambient temperature. The duration of the test shall be 24 hours 测试在室温下进行, 测试时间为 24h.		P
	Results: there is no disassembly and no fire during the test and within seven days after this test 试验结果: 试验期间和试验后 7 天内, 无解体或起火现象。	See the TABLE: 38.3.4.7	P
38.3.4.8	Forced Discharge/强制放电		P
	Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. 在环境温度下, 将单个电芯连接在 12V 的直流电源上进行强制放电, 此直流电源提供给每个电芯的初始电流为制造厂指定的最大放电电流。		P
	Results: there is no disassembly and no fire during the test and within seven days after this test 试验结果: 试验期间和试验后 7 天, 无解体或起火现象。	See the TABLE: 38.3.4.8	P

TABLE: 38.3.4.1 Altitude simulation 高度模拟							Pass
MODEL	Before test		After test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
C1#	49.852	4.18	49.850	4.17	0.004	99.76	Pass
C2#	49.732	4.17	49.731	4.17	0.002	100.00	Pass
C3#	49.657	4.18	49.655	4.17	0.004	99.76	Pass
C4#	49.649	4.18	49.647	4.17	0.004	99.76	Pass
C5#	50.024	4.17	50.021	4.17	0.006	100.00	Pass
Fully charged after 25 cycles							
C6#	49.667	4.17	49.665	4.17	0.004	100.00	Pass
C7#	49.548	4.18	49.546	4.17	0.004	99.76	Pass
C8#	49.692	4.17	49.690	4.17	0.004	100.00	Pass
C9#	50.043	4.18	50.041	4.17	0.004	99.76	Pass
C10#	49.698	4.18	49.696	4.17	0.004	99.76	Pass
Results: Pass = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.2 Thermal test 温度试验							Pass
MODEL	Before test		After test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
C1#	49.850	4.17	49.838	4.11	0.024	98.56	Pass
C2#	49.731	4.17	49.720	4.12	0.022	98.80	Pass
C3#	49.655	4.17	49.642	4.12	0.026	98.80	Pass
C4#	49.647	4.17	49.635	4.11	0.024	98.56	Pass
C5#	50.021	4.17	50.010	4.11	0.022	98.56	Pass
Fully charged after 25 cycles							
C6#	49.665	4.17	49.652	4.11	0.026	98.56	Pass
C7#	49.546	4.17	49.534	4.12	0.024	98.80	Pass
C8#	49.690	4.17	49.677	4.11	0.026	98.56	Pass
C9#	50.041	4.17	50.030	4.11	0.022	98.56	Pass
C10#	49.696	4.17	49.682	4.11	0.028	98.56	Pass
Results: Pass = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.3 Vibration 振动							Pass
MODEL	Before test		After test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
C1#	49.838	4.11	49.837	4.11	0.002	100.00	Pass
C2#	49.720	4.12	49.720	4.11	0.000	99.76	Pass
C3#	49.642	4.12	49.642	4.12	0.000	100.00	Pass
C4#	49.635	4.11	49.634	4.11	0.002	100.00	Pass
C5#	50.010	4.11	50.008	4.11	0.004	100.00	Pass
Fully charged after 25 cycles							
C6#	49.652	4.11	49.652	4.11	0.000	100.00	Pass
C7#	49.534	4.12	49.533	4.11	0.002	99.76	Pass
C8#	49.677	4.11	49.676	4.11	0.002	100.00	Pass
C9#	50.030	4.11	50.029	4.11	0.002	100.00	Pass
C10#	49.682	4.11	49.682	4.11	0.000	100.00	Pass
Results: Pass = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.4 Shock 冲击							Pass
MODEL	Before test		After test		Mass loss (%)	Residual OCV (%)	Results
	Mass(g)	OCV(V)	Mass(g)	OCV(V)			
Fully charged at first cycle							
C1#	49.837	4.11	49.837	4.11	0.000	100.00	Pass
C2#	49.720	4.11	49.720	4.11	0.000	100.00	Pass
C3#	49.642	4.12	49.642	4.11	0.000	99.76	Pass
C4#	49.634	4.11	49.633	4.11	0.002	100.00	Pass
C5#	50.008	4.11	50.008	4.11	0.000	100.00	Pass
Fully charged after 25 cycles							
C6#	49.652	4.11	49.652	4.10	0.000	99.76	Pass
C7#	49.533	4.11	49.532	4.11	0.002	100.00	Pass
C8#	49.676	4.11	49.676	4.10	0.000	99.76	Pass
C9#	50.029	4.11	50.028	4.11	0.002	100.00	Pass
C10#	49.682	4.11	49.682	4.11	0.000	100.00	Pass
Results: Pass = no leakage, no venting, no disassembly, no rupture, no fire, and the open circuit voltage drop not less than 90%							

TABLE: 38.3.4.5 External Short-circuit 外部短路				Pass
MODEL	Ambient(°C) (At 57± 4°C)	Testing resistance (mΩ)	Max. External Temperature(°C)	Results
Fully charged at first cycle				
C1#	57.4	87.1	58.2	Pass
C2#	57.4	84.3	58.1	Pass
C3#	57.4	85.2	57.8	Pass
C4#	57.4	86.2	57.9	Pass
C5#	57.4	82.1	58.1	Pass
Fully charged after 25 cycles				
C6#	57.3	85.6	57.6	Pass
C7#	57.3	86.4	57.8	Pass
C8#	57.3	83.7	57.7	Pass
C9#	57.3	81.1	58.0	Pass
C10#	57.3	84.2	57.9	Pass
Results: Pass = no disassembly, no rupture, no fire during the test and within six hours after the test.				

TABLE: 38.3.4.6 Impact 重物冲击					Pass
TABLE: 38.3.4.6 Crush 挤压					N/A
MODEL	Max. External Temperature(°C)	Results	MODEL	Max. External Temperature(°C)	Results
50% of the design rated capacity at first cycle			50% of the design rated capacity after 25 cycles		
C11#	23.6	Pass	C16#	23.4	Pass
C12#	23.4	Pass	C17#	23.5	Pass
C13#	23.7	Pass	C18#	23.6	Pass
C14#	23.9	Pass	C19#	23.5	Pass
C15#	23.8	Pass	C20#	23.3	Pass
Results: Pass = no disassembly, no fire during the test and within six hours after this test.					


TABLE: 38.3.4.7 Overcharge 过度充电					Pass
The test current = 2.6A					-
The test voltage = 8.40V					-
MODEL	OCV(V)	Results	MODEL	OCV(V)	Results
Fully charged at first cycle			Fully charged after 25 cycles		
C21#	4.17	Pass	C25#	4.17	Pass
C22#	4.17	Pass	C26#	4.17	Pass
C23#	4.17	Pass	C27#	4.17	Pass
C24#	4.17	Pass	C28#	4.17	Pass
Results: Pass = no disassembly, no fire during the test and within seven days after this test.					

TABLE: 38.3.4.8 Forced discharge 强制放电					Pass
MODEL	OCV(V)	Results	MODEL	OCV(V)	Results
Fully discharged at first cycle			Fully discharged after 25 cycles		
c29#	3.267	Pass	c39#	3.268	Pass
c30#	3.271	Pass	c40#	3.270	Pass
c31#	3.278	Pass	c41#	3.271	Pass
c32#	3.272	Pass	c42#	3.273	Pass
c33#	3.269	Pass	c43#	3.264	Pass
c34#	3.264	Pass	c44#	3.268	Pass
c35#	3.265	Pass	c45#	3.277	Pass
c36#	3.267	Pass	c46#	3.268	Pass
c37#	3.260	Pass	c47#	3.272	Pass
c38#	3.263	Pass	c48#	3.270	Pass
Results: Pass = no disassembly, no fire during the test and within seven days after this test.					

Photos of the Battery

电池照片

Front view / 前视图

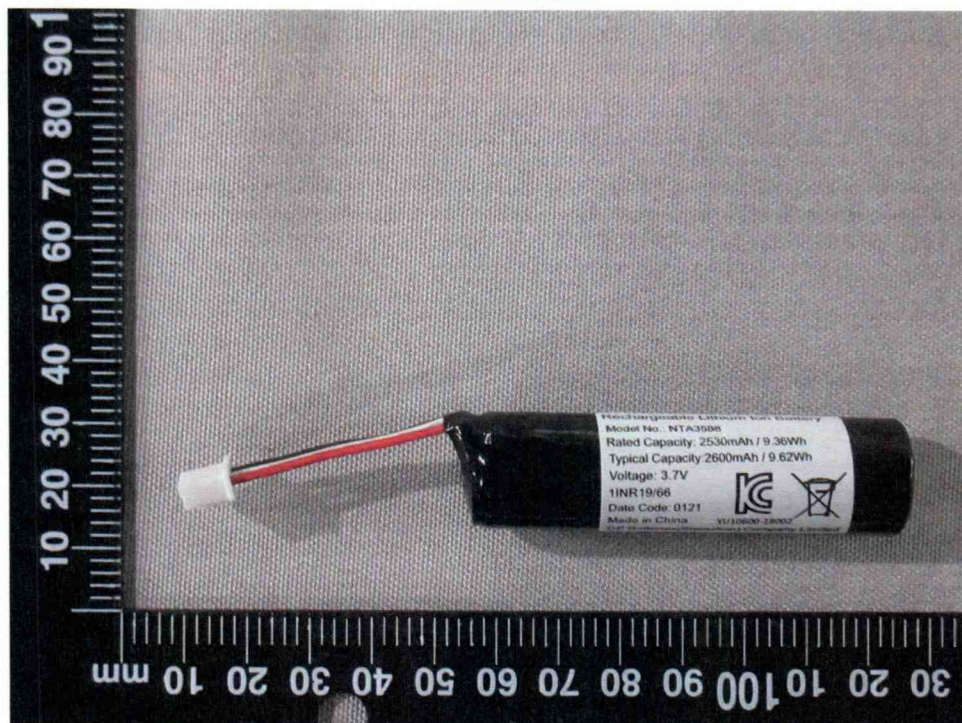


Back view / 后视图




Photos of the Cell

电芯照片

Front view /前视图

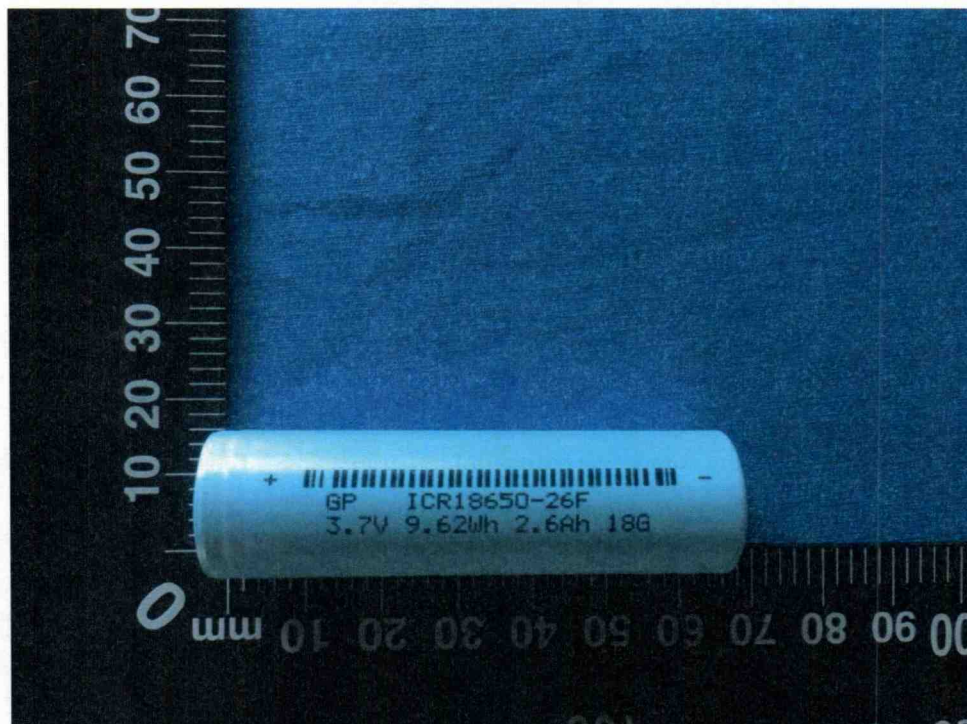

Back view /后视图

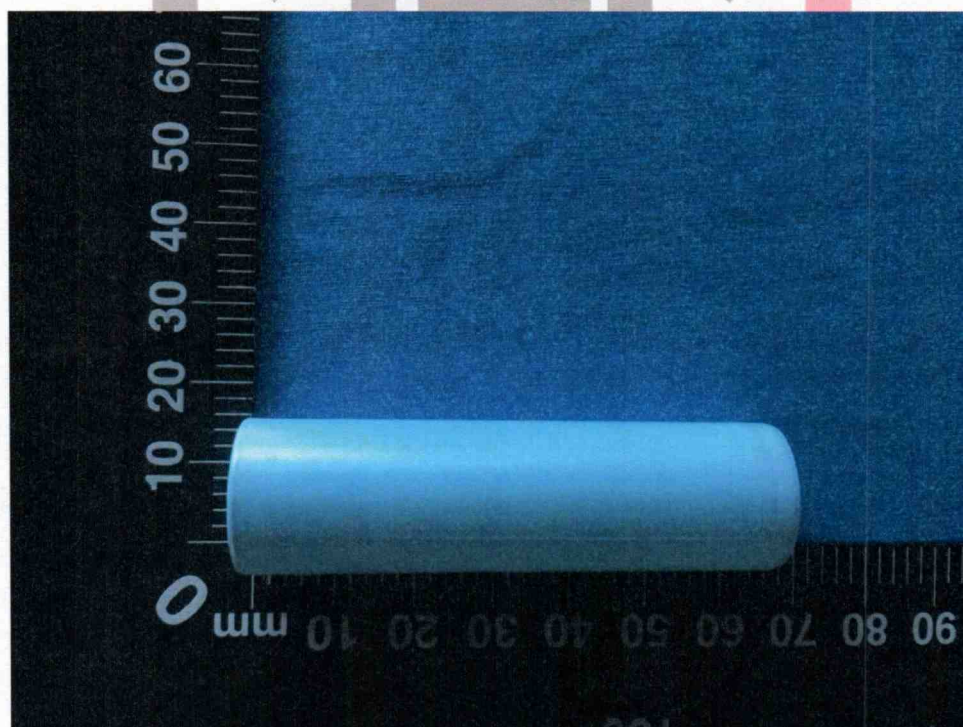

– End of Report –

Important Note**注 意 事 项**

1. This test report is invalid without the special testing seal and cross-page seal of Guangzhou MCM Certification & Testing Co., Ltd.
本检测报告无广州邦禾技术有限公司检测专用章、骑缝章无效。
2. Nobody is allowed to photocopy or partly photocopy this test report without written permission of Guangzhou MCM Certification & Testing Co., Ltd.
未经广州邦禾检测技术有限公司书面同意, 不得复制或部分地复制本检测报告。
3. This test report is invalid without the signatures of Approver, Reviewer and Tester.
本检测报告无批准人、审核人及检测员签名无效。
4. This test report is invalid if altered.
本检测报告涂改无效。
5. Objection to this test report must be submitted to Guangzhou MCM Certification & Testing Co., Ltd. within 15 days after the publication of the report.
若对此检测报告有异议, 必须在报告发布之日起十五天内向广州邦禾检测技术有限公司提出。
6. This test report is only responsible for the received samples.
本检测报告仅对来样负责。
7. The test items in this report are not in the scope of CMA. They Do not have the impartial function.
本报告检测项目不在 CMA 范围内, 不具有公正性的作用。
8. As for the test results, "N/A" means "Not applicable", "P" means "Pass" and "F" means "Fail".
本检测结果中"N/A"表示"不适用", "P"表示"通过", "F"表示"不通过"。

Testing Lab.:	Guangzhou MCM Certification & Testing Co., Ltd.
检测单位:	广州邦禾检测技术有限公司
Address:	1 F No.13, Zhong San Section, ShiGuang Road, Panyu District, Guangzhou City, Guangdong Province, China.
地址:	中国 广州市番禺区市广路钟三路段 13 号之一
Tel/电话:	0086-20-34777662
Email/电子邮箱:	mark.miao@mcmtek.com
Web/公司网址:	Http://www.mcmtek.com