



13AC1



Actual product appearance may vary.

AC Series Door Switch, Single Pole Double Throw Circuitry, 15 A at 250 Vac, Rod Actuator, Silver Contacts, Screw Termination

Features

- Automatically cuts power when service door or drawer is opened
- Choice of momentary, maintained or pull-to-charge actuation
- Versatile mounting bracket for side or end mounting
- Current rating ranges from 5 A to 25 A
- Available with one or two SPDT switches
- UL recognized versions available
- Choice of termination

Potential Applications

- Appliances
- Vending machines
- Office equipment
- Computer/business equipment
- Test instruments
- Medical/dental equipment
- Communications equipment
- HVAC equipment

Description

MICRO SWITCH™ AC Series Door Switches are used for simple or precision on/off application needs. They enable circuit testing with POWER ON by manually pulling a rod actuator to the maintained-ON position. Closing the door resets the switch.


Product Specifications	
Switch Type	Door 46,0 mm H x 12,7 mm W x 50,0 mm L [1.8 in H x 0.5 in W x 1.9 in L]
Sealed	No
Ampere Rating	15 A
Circuitry	Single Pole Double Throw (SPDT)
Actuator	Rod
Termination	Screw
Operating Temperature Range	-18 °C to 149 °C [-65 °F to 300 °F]
Voltage	250 Vac
Contact Type	Silver
Operating Position (O.P.)	12,3 mm [0.485 in] min.
Free Position (F.P.)	15,9 mm [0.625 in] max.

Housing Material	Stainless Steel Bracket, Stainless Steel Rod
Weight	42,64 g [.094 lb]
Package Height	46 mm [1.81 in]
Package Width	13,21 mm [.52 in]
Package Length	56,4 mm [2.22 in]
Availability	Global
UNSPSC Code	30211905
UNSPSC Commodity	30211905 Snap switches
Series Name	AC

HONEYWELL
PART NUMBER
13AC1

REV	DOCUMENT	CHANGED BY	CHECK
11	0036921	SS 25JAN08	BLR

PUSH TO OPERATE- RETURNS AUTOMATICALLY TO POSITION SHOWN
PUSH AND TURN (APPROXIMATELY 60° CLOCKWISE) TO LATCH. REMAINS IN OPERATED POSITION UNTIL RESET FOR AUTOMATIC RETURN BY NEXT PUSH OPERATION $\triangle 3$

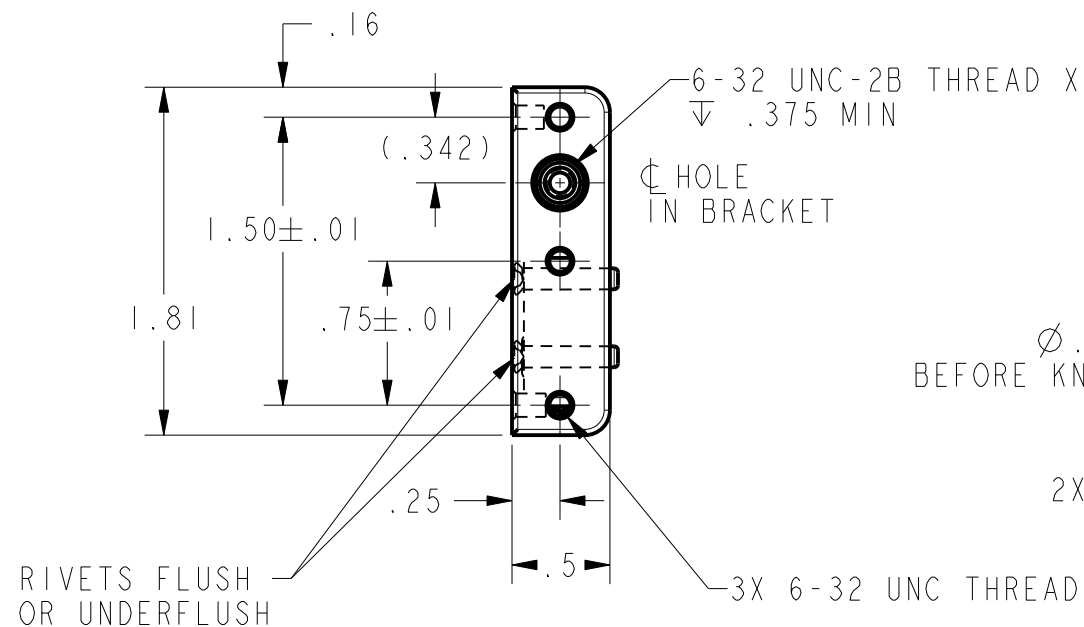

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

15.1A 1/2HP 125, 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
5A 125 VAC "L"

CHARACTERISTICS

TOTAL TRAVEL - .360 APPROX
FULLY DEPRESSED FORCE - 4 LBS MAX

NOTES

- 1 - PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS
- 2 - WITH ROD IN ACTUATED POSITION, BASIC SWITCH PLUNGER MUST HAVE .010 MIN OVERTRAVEL AND WITH ROD IN FREE POSITION BASIC SWITCH PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL
- $\triangle 3$ PLUNGER MUST BE DEPRESSED TO WITHIN .325 FROM THE FRONT SURFACE OF MOUNTING BRACKET TO ASSURE RESET FOR AUTOMATIC RETURN

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN SS 25JAN08	Honeywell		
NO PLACES X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 ANGLES X ±	CHECK BLR 25JAN08			
THIRD ANGLE PROJECTION	- THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		SIZE TYPE CAGE CODE DRAWING NAME	REV
	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	B I -	13AC1	11
	Pro/ENGINEER 3D	SCALE 1:1	SHEET 1 OF 1	