

# Product data sheet

Specifications



Drilled front plate, Harmony XAP, XB2 SL, metal, 1 cut out, 72x72mm, 22mm

XAPE301

## Main

|                               |                                                                                                                                                                                                                                                           |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Range of product              | Harmony XAP                                                                                                                                                                                                                                               |
| Product or component type     | Front plate with fixing screws                                                                                                                                                                                                                            |
| Device short name             | XAPE                                                                                                                                                                                                                                                      |
| Product destination           | For Ø 22 mm control and signalling units                                                                                                                                                                                                                  |
| Product front plate size      | 72 x 72 mm                                                                                                                                                                                                                                                |
| Number of cut-out             | 1 cut-out                                                                                                                                                                                                                                                 |
| Material                      | Anodised aluminium                                                                                                                                                                                                                                        |
| Device mounting               | Flush                                                                                                                                                                                                                                                     |
| IP degree of protection       | IP65 conforming to IEC 60529<br>IP65 conforming to NF C 20-010                                                                                                                                                                                            |
| Resistance to chemical agents | Good resistant to acetone<br>Good resistant to alcohols<br>Good resistant to chloride and fluoride solvents<br>Good resistant to diluted mineral acids<br>Good resistant to oils and petrol<br>Good resistant to organic acids<br>Good resistant to salts |

## Complementary

|                |         |
|----------------|---------|
| Product weight | 0.05 kg |
|----------------|---------|

## Environment

|                                       |                                                                      |
|---------------------------------------|----------------------------------------------------------------------|
| Protective treatment                  | TH<br>TC                                                             |
| Ambient air temperature for storage   | -40...70 °C                                                          |
| Ambient air temperature for operation | -25...70 °C                                                          |
| Overvoltage category                  | Class I conforming to IEC 60536<br>Class I conforming to NF C 20-030 |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 2.000 cm  |
| Package 1 Width              | 12.500 cm |
| Package 1 Length             | 17.000 cm |
| Package 1 Weight             | 69.000 g  |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 2       | S02       |
| Number of Units in Package 2 | 30        |
| Package 2 Height             | 15.000 cm |
| Package 2 Width              | 30.000 cm |
| Package 2 Length             | 40.000 cm |
| Package 2 Weight             | 2.382 kg  |

## Contractual warranty

|                      |    |
|----------------------|----|
| Warranty (in months) | 18 |
|----------------------|----|



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



### Environmental footprint

|                                                        |                                               |
|--------------------------------------------------------|-----------------------------------------------|
| Total lifecycle Carbon footprint                       | 0.5 kg CO2 eq.                                |
| Carbon footprint of the manufacturing phase [A1 to A3] | 0.5 kg CO2 eq.                                |
| Carbon footprint of the distribution phase [A4]        | 0 kg CO2 eq.                                  |
| Carbon footprint of the installation phase [A5]        | 0 kg CO2 eq.                                  |
| Carbon footprint of the use phase [B2, B3, B4, B6]     | 0 kg CO2 eq.                                  |
| Carbon footprint of the end-of-life phase [C1 to C4]   | 0 kg CO2 eq.                                  |
| Environmental Disclosure                               | <a href="#">Product Environmental Profile</a> |

## Use Better



### Materials and Substances

|                                        |                                                                                                                                                                                                                                                                                              |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Packaging made with recycled cardboard | Yes                                                                                                                                                                                                                                                                                          |
| Packaging without single use plastic   | No                                                                                                                                                                                                                                                                                           |
| EU RoHS Directive                      | <a href="#">Compliant</a>                                                                                                                                                                                                                                                                    |
| REACH Regulation                       | <a href="#">Free of Substances of Very High Concern above the threshold</a>                                                                                                                                                                                                                  |
| California proposition 65              | <b>WARNING:</b> This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |

## Use Longer



### Lifetime extension

|        |    |
|--------|----|
| Repair | No |
|--------|----|

## Use Again




### Repack and remanufacture

|                                 |                                          |
|---------------------------------|------------------------------------------|
| End of life manual availability | No need of specific recycling operations |
| Take-back                       | No                                       |


Dimensions Drawings

Dimensions and Fixing

Below drawing shows a front plate with 4 cut-outs. Refer to the product characteristics to get the number of cut-outs.

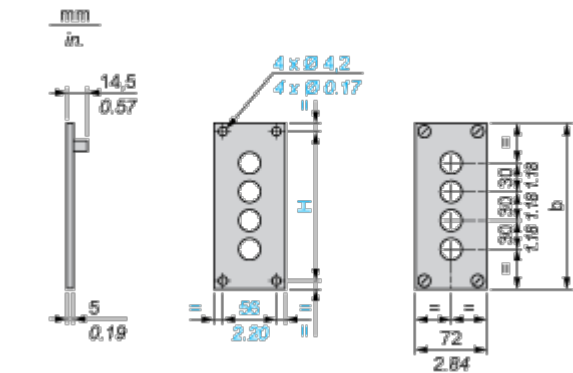


Panel cut-out



| b  |      | b1 |      | H  |      |
|----|------|----|------|----|------|
| mm | in.  | mm | in.  | mm | in.  |
| 72 | 2.83 | 44 | 1.73 | 56 | 2.20 |

Technical Illustration

Dimensions

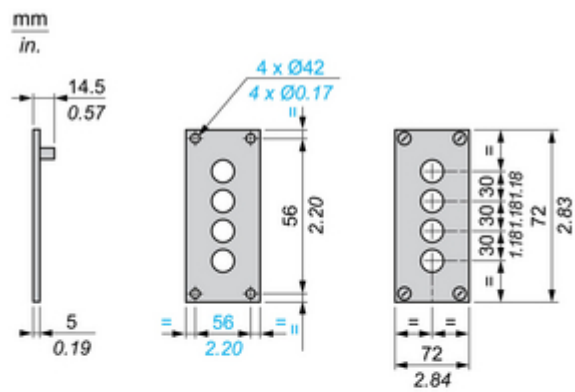

Panel cut-out




Image of product / Alternate images

Alternative

---

