

U.S. Patents: 4,572,460; 4,662,049; 4,720,913; 5,371,638;
other US and foreign patents pending.

Quantum Corporation ("Quantum") warrants, subject to the limitations set forth below, that this Quantum DLTape™ 1/2" cartridge tape product (the "Product") is free from defects in material and manufacture at the time of purchase.

If any defect in material or manufacture appears during the normal lifetime of the Product, Quantum's entire liability, and your exclusive remedy is, at Quantum's sole option, for Quantum to: (a) repair the Product, (b) replace the Product, or (c) refund to you the purchase price of the Product, provided that the Product is returned to Quantum with proof of purchase such as a purchase order, invoice, or sales receipt.


This warranty does *not* apply to the failure of the Product resulting from misuse, abuse, accident, neglect or mishandling, improperly adjusted or maintained tape drives, incorrect environments, or wear from ordinary use.

THIS WARRANTY IS MADE IN LIEU OF ALL OTHER RIGHTS, CONDITIONS AND WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

QUANTUM SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY (INCLUDING, WITHOUT LIMITATION, TORT OR CONTRACT) FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGE, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOST PROFITS, LOST SAVINGS OR LOST DATA, IN ANY WAY RELATED TO THE PRODUCT.

This warranty gives you specific legal rights and you may have other rights which vary from state to state.

For warranty service and directions for the return of the Product contact the seller of the Product or Quantum Corporation (800-827-3378).

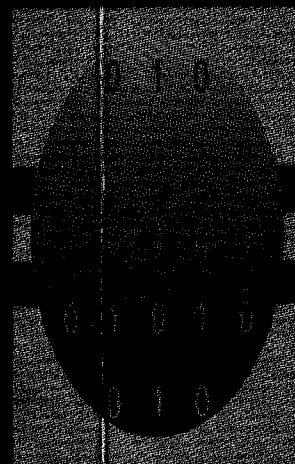

DLT™


Quantum

CAPACITY FOR THE EXTRAORDINARY

DLTtape™ III XT

CARTRIDGE STORAGE

To prevent condensation and for long life, the cartridge should only be operated or stored in the following conditions.

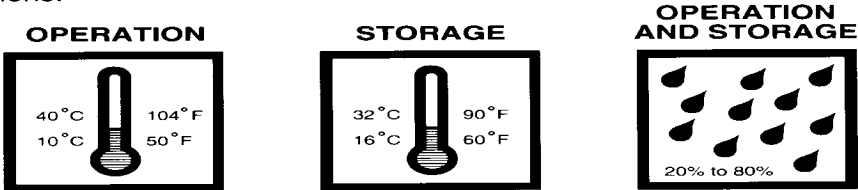




CARTRIDGE HANDLING

Handle the cartridge carefully. The cartridge may be damaged if it is dropped. Labels should go only in the Front Slide Slot as shown in the diagram. Do not put any labels on the top, bottom, sides, or rear of the cartridge. When not in use, the cartridge should be stored in its protective plastic container. Do not store the cartridge in direct sunlight.

WRITE PROTECTING CARTRIDGES

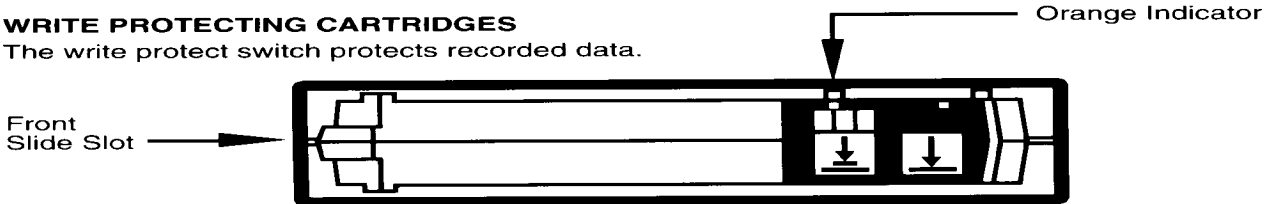The write protect switch protects recorded data.



-  Push the switch to the left to prevent any data recording on the cartridge. Orange indicator can be seen.
 -  Push the switch to the right to allow data recording on the cartridge. Orange indicator cannot be seen.
- In either position of the write protect switch, the data can be read from the cartridge.

TAPE DURABILITY

DLT 1/2" cartridge Tapes, on average, will exceed 1,000,000 head passes when operated in a DLT 1/2" cartridge Drive in office or computer room environment.

CAUTION

This cartridge is designed for use with the DLT 2000 XT Drives. DO NOT USE IN DLT 2000 DRIVES.

INSERTING THE CARTRIDGE INTO THE DRIVE

- * Verify that the system power is turned on.
- * When the "Operate Handle" light (green) turns ON alone and the drive sounds "beep," pull the handle up to the open position.
- * Insert the cartridge (making sure the label in the front slide slot is facing out) fully into the drive until a firm stop is encountered.
- * Push the handle down to the closed position. The "Tape in Use" light (yellow) blinks as the tape loads and stays ON steady when the tape is ready for use.

REMOVING THE CARTRIDGE FROM THE DRIVE

- * Push the button labeled "Unload" or execute DISMOUNT command. The "Tape in Use" light (yellow) blinks as the tape rewinds.
- * When the "beep" sounds and the "Operate Handle" light (green) is ON, pull the handle up to the open position to eject the cartridge.
- * Remove the cartridge and push the handle down to the closed position.

ARCHIVE STORAGE

Cartridges intended for archiving data for 30 years or more shall be stored in its plastic container and in room environment conditions of 73° F ± 9° F (23° C ± 5° C), 50% ± 10% Relative Humidity.

DLT, DLTtape, CompacTape, and CAPACITY FOR THE EXTRAORDINARY are trademarks of Quantum Corporation. The Quantum logo is a registered trademark of Quantum Corporation.