MATERIAL
AISI 304 stainless steel.

RIVETS
AISI 304 stainless steel.

PULLING HOOK
Perpendicular to clamping arm, AISI 304 stainless steel.

OSCILLATING PIN AND NUTS
AISI 303 stainless steel.

HANDLE
Polyurethane, red colour.

FEATURES AND APPLICATIONS
All articulated joints are lubricated with special grease.
MTD. clamps ensure tight closing of any cover.
The position of the pulling hook can be adjusted in length according to the specific applications.

ACCESSORIES ON REQUEST
TRU: U-shaped pulling hooks of various dimensions (see page).



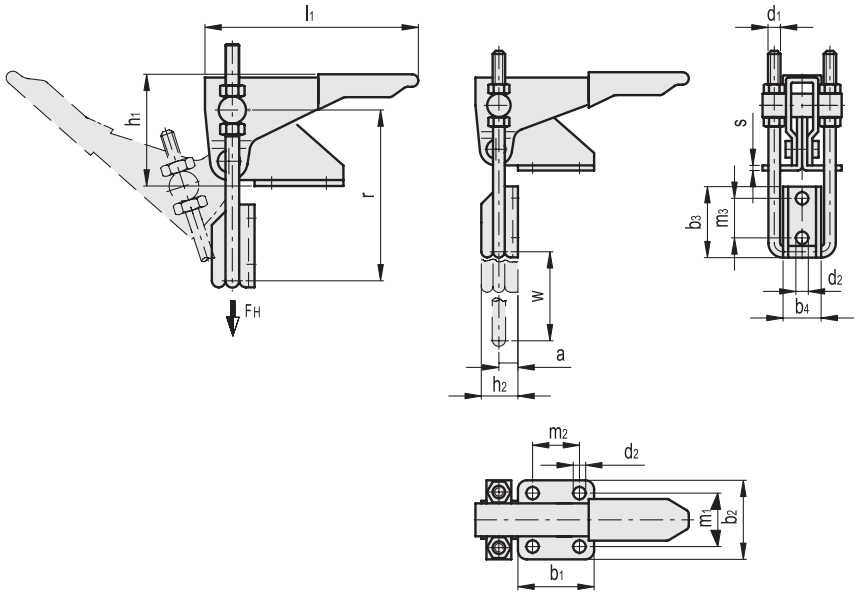

INOX STAINLESS STEEL

Code	Description	a	b1	b2	b3	b4	d1	d2	h1	h2	l1	m1	m2	m3	r	s	Stroke w	FH [N]*	⚖
GG.AS530	MTD.160-T3X	5	26	35	25.5	14	M4	4.3	36	10	68	22	13	14.3	48÷58	2	34.5	1600	100
GG.AS535	MTD.320-T3X	8	36	44	37	22	M6	6.5	52.5	15	106	25.5	19	20.5	75÷95	3	53	3200	320
GG.AS540	MTD.700-T3X	13	52	54	48.5	26	M8	8.5	66	23	147	36.5	32	27	98÷122	3.5	64	7500	680

* Holding force.

6/2024

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.