

Datasheet

EES18A series 18 watt Single Output Desktop

ENGLISH



Features


- Operating temperature: 0°C 40°C
- Input Voltage: 100 240Vac
- Output Power: 18W
- Power Consumption at no-load : 0.3W Max
- AC inlet IEC320-C14 socket
- Compact and light-weight plastic case
- Protections: short circuit/overload/ overheat
- ErP compliant
- Meets CE and UL standards
- Dimensions (LxWxH mm): 99 x 52 x 36
- Connector: P1J 2.1mm
- 2 year warranty

| Part number | Voltage | Rated Current | Efficiency | Line Regulation | Load Regulation | Ripple and Noise | MTBF |
|-------------|---------|------------------|------------|--------------------|--------------------|------------------------|--|
| 770-2781 | 5V | 3A | 78% | | | | |
| 770-2784 | 7.5V | 2.5A | 79% | - | | 120ma)/ | 50,000hrs |
| 770-2788 | 9V | 2A | 80% | | | | |
| 770-2797 | 12V | 1.5A | 81% | ± 2% | ± 5% | 120mV | min. |
| 770-2790 | 15V | 1.2A | 81% | | | Max | MIL-HDBK – 217F (25° ^C) |
| 770-2794 | 18V | 1A | 81% | | | | 217F(25) |
| 770-2804 | 24V | 0.75A | 82% | | | | |
| 770-2807 | 28V | 0.64A | 82% | | | | |

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.



ENGLISH

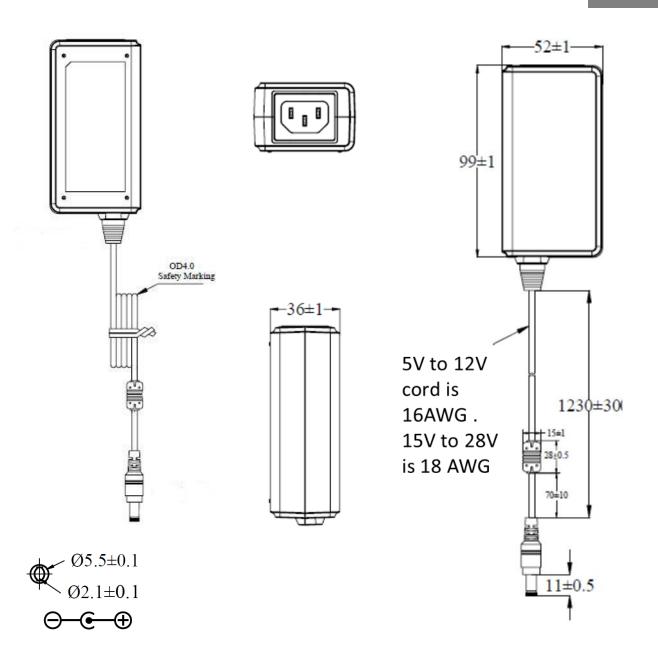

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.