

KRPA-11DN-110

✓ ACTIVE

Potter & Brumfield | Potter & Brumfield KRPA

TE Internal #: 4-1393104-9

General Purpose Power Relay, DC, Monostable, 2 Form C DPDT-CO, 10 A Contact Rating, 110 VDC Coil Voltage, Potter & Brumfield KRPA

[View on TE.com >](#)



Relays & Contactors > Electromechanical Relays



Relay & Contactor Type: **General Purpose Power Relay**

Current Type: **DC**

Coil Magnetic System: **Monostable**

Contact Arrangement: **2 Form C DPDT-CO**

Contact Current Rating: **10 A**

Features

Product Type Features

Relay & Contactor Type	General Purpose Power Relay
------------------------	-----------------------------

Configuration Features

Contact Number of Poles	2
Coil Special Features	UL Coil Insulation Class B
Contact Arrangement	2 Form C DPDT-CO

Electrical Characteristics

Contact Limiting Short-Time Current	10 A
Contact Limiting Making Current	10 A
Contact Limiting Continuous Current	10 A
Contact Limiting Breaking Current	10 A
Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Insulation Initial Dielectric Between Adjacent Contacts	1000 Vrms
Contact Switching Load (Min)	300mA @ 12V
Coil Resistance	10000 Ω
Insulation Initial Resistance	1000 MΩ
Contact Current Rating	10 A
Coil Voltage Rating	110 VDC
Contact Voltage Rating	240 VAC



Coil Power Rating DC	1.2 W
----------------------	-------

Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms
---	-----------

Body Features

Product Weight	85 g[2.988 oz]
----------------	----------------

Enclosure Type	Dust Protected
----------------	----------------

Contact Features

Contact Material	Silver Cadmium Oxide
------------------	----------------------

Termination Features

Main Termination & Connection Type	Socket Pins
------------------------------------	-------------

Coil Termination & Connection Type	Socket Pins
------------------------------------	-------------

Mechanical Attachment

Product Mounting Feature Type	Mounting Studs
-------------------------------	----------------

Product Mount Type	Panel & Socket Mount
--------------------	----------------------

Dimensions

Product Width	35.71 mm[1.4 in]
---------------	------------------

Product Length	35.71 mm[1.4 in]
----------------	------------------

Product Height	50.8 mm[2 in]
----------------	---------------

Usage Conditions

Operating Temperature Range	-45 – 70 °C[-49 – 158 °F]
-----------------------------	---------------------------

Environmental Category of Protection	RTI
--------------------------------------	-----

Environmental Ambient Temperature (Max)	70 °C[158 °F]
---	---------------

Operation/Application

Indicator Type	Lamp
----------------	------

Current Type	DC
--------------	----

Coil Magnetic System	Monostable
----------------------	------------

Packaging Features

Packaging Method	Tray
------------------	------

Other

Coil Power Rating Class	1 – 1.5 W
-------------------------	-----------

Contact Current Class	16 A
-----------------------	------

Environmental Ambient Temperature Class	50 – 70 °C
---	------------



Height Class (Mechanical)	50 – 60 mm
Length Class (Mechanical)	35 – 40 mm
Width Class (Mechanical)	30 – 40 mm

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Cadmium oxide (10% in Component Part) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


KRPA-11DN-110

General Purpose Power Relay, DC, Monostable, 2 Form C DPDT-CO, 10 A Contact Rating, 110 VDC Coil Voltage, Potter & Brumfield KRPA





TE Part # 2-1419106-3
27E891=SOCKET,KRPA,8,OCTAL,
DINRAIL




TE Part # 1393143-6
27E122=SOCKET,KRP,8,SCW,SURF-
MOUNT


Also in the Series | Potter & Brumfield KRPA



AC Relays(21)

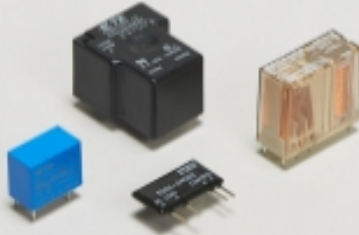


General Purpose Power Relays(45)

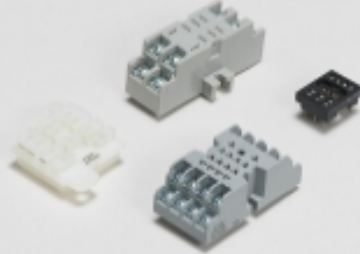

Relay Accessories(4)

Customers Also Bought



TE Part #1393143-6
27E122=SOCKET,KRP,8,SCW,SURF-
MOUNT



TE Part #2-1879450-6
TE 500W 120R 5% Bracket



TE Part #9-1393104-9
KRPA-5AG-24=KRPA



TE Part #2-1423164-0
7022PC=RLY,STD,OFF,2P,125VDC,1



TE Part #6-1393104-7
KRPA-14AG-24=KRPA



TE Part #91521-1
CCII TYPE III+ PIN SKT 18-14 ASSY



TE Part #1-1393105-2
KRPA-11AG-24=RELAY,GENPUR,
OCTA



TE Part #3-1393248-9
W33-T2N1Q-20=W33



TE Part #8-1393113-5
KUPE-11D15-110=KU



TE Part #4-1393159-6
20C314=SPRING,HOLD,DOWN,KUP



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-1393104-9_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-1393104-9_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-1393104-9_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

KRPA, KRP, KA, KR 5 to 10 Amp General Purpose Relay

English

KR Sockets & Accessories

English

Product Specifications

Definitions General Purpose Relays

English

Agency Approvals

UL

English