


## FEATURES

- **Annealed Copper Conductor:** Provides superior conductivity and long-lasting performance
- **Polyvinyl Chloride Jacket:** Offers robust protection against environmental factors
- **Plain Conductor Type:** Ensures consistent electrical performance
- **24/0.2 Core Strands:** Enhances flexibility for easy installation
- **Wide Temperature Range:** Operates effectively from -15 °C to 70 °C
- **500 V Voltage Rating:** Suitable for a variety of electrical applications
- **White Jacket Colour:** Aids in easy identification and aesthetic integration

## RS PRO 0.75 mm<sup>2</sup> Flexible Cable, 100 m

RS Stock No: 606-062

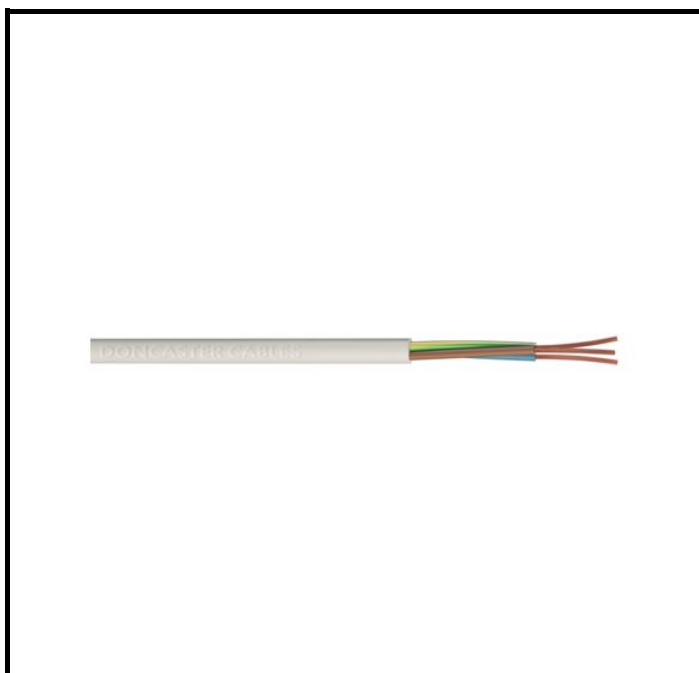

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

This RS PRO flexible cable is designed for reliable electrical connections in various industrial and commercial environments. With a conductor made from annealed copper, it ensures excellent conductivity and durability. The cable is suitable for installations requiring flexibility and is ideal for use in confined spaces.

## General Specifications

Conductor Material	Annealed Copper
Conductor Type	Plain
Jacket Colour	White
Product Type	Flexible Cable

## Mechanical Specifications

Cable CSA	0.75 mm <sup>2</sup>
Cable Length	100 m
Core Strands	24/0.2
Jacket Material	Polyvinyl Chloride
Number of Cores	2
Outside Diameter	7.2 mm

## Operation Environment Specifications

Maximum Operating Temperature	70 °C
Minimum Operating Temperature	-15 °C

## Approvals

Standards/Approvals	ACI, BASEC ISO 9001 UKAS CS1-029, BS EN 50363-3, BS EN 50363-4-1, BS EN 50525-2-11, BS EN 60228
---------------------	---

## Electrical Specifications

Voltage	500 V
---------	-------