

DC-Micromotors

Precious Metal Commutation

6,8 mNm
8,5 W

Series 2224 ... SR

Values at 22°C and nominal voltage	2224 U	003 SR	006 SR	012 SR	018 SR	024 SR	036 SR	
1 Nominal voltage	U_N	3	6	12	18	24	36	V
2 Terminal resistance	R	0,56	1,94	8,71	17,5	36,3	91,4	Ω
3 Output power	$P_{2nom.}$	3,92	4,55	4,05	4,54	3,88	3,46	W
4 Efficiency, max.	$\eta_{max.}$	80	82	82	81	80	80	%
5 No-load speed	n_0	8 100	8 200	7 800	8 100	7 800	7 800	min ⁻¹
6 No-load current, typ. (with shaft \varnothing 2 mm)	I_0	0,066	0,029	0,014	0,01	0,007	0,005	A
7 Stall torque	M_H	18,5	21,2	19,8	21,4	19	16,9	mNm
8 Friction torque	M_R	0,23	0,2	0,2	0,21	0,2	0,22	mNm
9 Speed constant	k_n	2 730	1 380	657	454	328	219	min ⁻¹ /V
10 Back-EMF constant	k_E	0,366	0,725	1,52	2,2	3,04	4,56	mV/min ⁻¹
11 Torque constant	k_M	3,49	6,92	14,5	21	29,1	43,5	mNm/A
12 Current constant	k_I	0,286	0,144	0,069	0,048	0,034	0,023	A/mNm
13 Slope of n-M curve	$\Delta n/\Delta M$	438	387	394	379	411	462	min ⁻¹ /mNm
14 Rotor inductance	L	11	45	200	450	800	1 800	μ H
15 Mechanical time constant	τ_m	11	11	11	11	11	11	ms
16 Rotor inertia	J	2,4	2,7	2,7	2,8	2,6	2,3	gcm ²
17 Angular acceleration	$\alpha_{max.}$	77	78	74	77	74	74	$\cdot 10^3$ rad/s ²
18 Thermal resistance	R_{th1} / R_{th2}	5 / 20						K/W
19 Thermal time constant	τ_{w1} / τ_{w2}	6,8 / 440						s
20 Operating temperature range:								
- motor		-30 ... +85 (optional version -55 ... +125)						°C
- winding, max. permissible		+125						°C
21 Shaft bearings		sintered bearings (standard)			ball bearings, preloaded (optional version)			
22 Shaft load max.:								
- with shaft diameter		2			2			mm
- radial at 3 000 min ⁻¹ (3 mm from bearing)		1,5			8			N
- axial at 3 000 min ⁻¹		0,2			0,8			N
- axial at standstill		20			10			N
23 Shaft play								
- radial	\leq	0,03			0,015			mm
- axial	\leq	0,2			0			mm
24 Housing material		steel, black coated						
25 Mass		46						g
26 Direction of rotation		clockwise, viewed from the front face						
27 Speed up to	$n_{max.}$	9 000						min ⁻¹
28 Number of pole pairs		1						
29 Magnet material		NdFeB						
Rated values for continuous operation								
30 Rated torque	M_N	2,2	4,5	6,7	6,8	6,6	6,1	mNm
31 Rated current (thermal limit)	I_N	0,7	0,7	0,52	0,37	0,25	0,16	A
32 Rated speed	n_N	7 170	6 390	4 390	4 800	4 300	4 060	min ⁻¹


Note: Rated values are calculated with nominal voltage and at a 22°C ambient temperature. The R_{th2} value has been reduced by 0%.

Note:

The diagram indicates the recommended speed in relation to the available torque at the output shaft for a given ambient temperature of 22°C.


The diagram shows the motor in a completely insulated as well as thermally coupled condition (R_{th2} 50% reduced).

The nominal voltage (U_N) curve shows the operating point at nominal voltage in the insulated and thermally coupled condition. Any points of operation above the curve at nominal voltage will require a higher operating voltage. Any points below the nominal voltage curve will require less voltage.

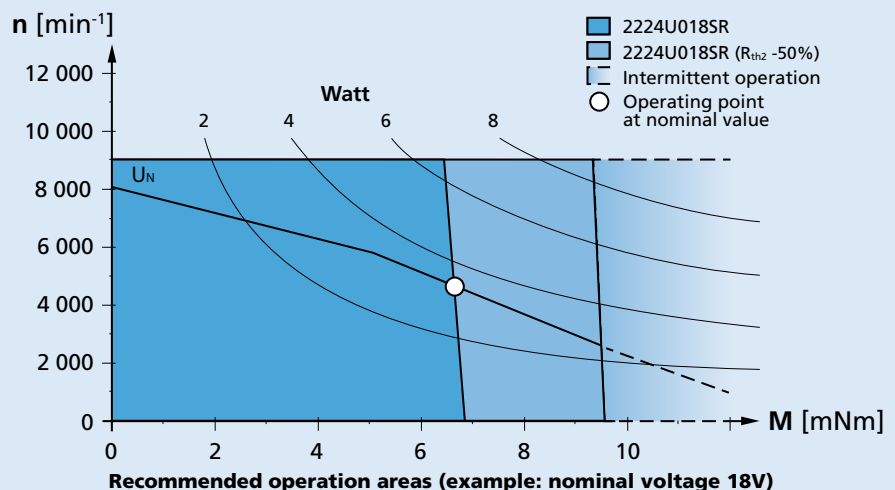

Dimensional drawing

Orientation with respect to motor terminals not defined

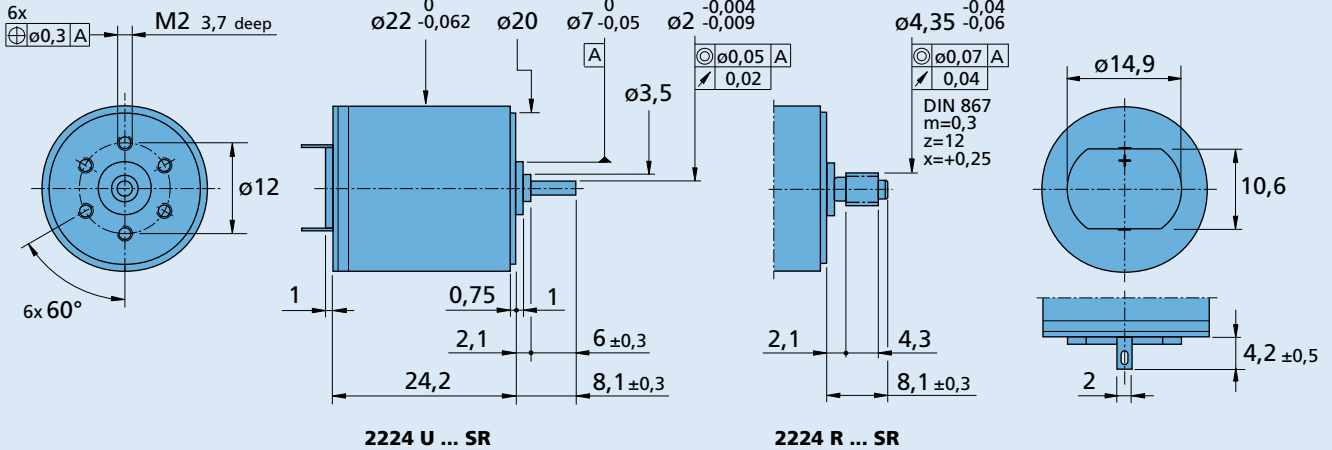

Options

Example product designation: **2224U012SR-277**

Option	Type	Description
L	Twin Leads	For motors with twin leads (PVC), length 150 mm, red (+) / black (-)
4924	Twin Leads	For motors with twin leads (PVC), length 300 mm, red (+) / black (-)
X4924	Twin Leads	For motors with twin leads (PVC), length 600 mm, red (+) / black (-)
4925	Twin Leads	For motors with twin leads (PVC), length 150 mm, red (+) / black (-), with connector AMP 179228-2
X4925	Twin Leads	For motors with twin leads (PVC), length 300 mm, red (+) / black (-), with connector AMP 179228-2
Y4925	Twin Leads	For motors with twin leads (PVC), length 600 mm, red (+) / black (-), with connector AMP 179228-2
F	Single Leads	For motors with single leads (PTFE), length 150 mm, red (+) / black (-)
277	Bearings	2 preloaded ball bearings

Product Combination

Precision Gearheads / Lead Screws	Encoders	Drive Electronics
20/1	IE2-16	SC 1801
22E	IE2-1024	SC 2402
22EKV	IEH2-4096	SC 2804
22F	IEH3-4096	MCDC 3002
22/7		MCDC 3003
23/1		MCDC 3006
22/2		
22/5		