


Power Metal Strip® Resistors, Very High Power (to 12 W), Low Value (Down to 0.15 mΩ), Surface-Mount



FEATURES

- Ideal for all types of current sensing and pulse applications including switching and linear power supplies, instruments, power amplifiers and shunts
- Proprietary processing technique produces low resistance values (down to 0.15 mΩ)
- Solid metal manganese-copper and nickel-chromium-aluminum alloy resistive element with low TCR (< 20 ppm/°C)
- Very low inductance 0.5 nH to 2.5 nH
- Low thermal EMF (< 3 μV/°C)
- AEC-Q200 qualified
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	SIZE	POWER RATING ⁽¹⁾ $P_{100\text{ }^{\circ}\text{C}}$ W	POWER RATING ⁽¹⁾ $P_{120\text{ }^{\circ}\text{C}}$ W	TOLERANCE %	RESISTANCE VALUE RANGE Ω	RESISTANCE VALUES CURRENTLY AVAILABLE ⁽²⁾ Ω	WEIGHT (typical) g/1000 pieces
WSLF3222	3222	12.0	9.0	± 1.0	0.15m to 0.27m	0.15m, 0.2m, 0.27m	173
	3222	10.0	7.0	± 1.0	0.4m to 0.5m	0.4m, 0.5m	173

Note

- (1) Terminal temperature
(2) Other values may be available, contact factory

GLOBAL PART NUMBER INFORMATION

Global Part Numbering: WSLF3222L2000FE6 (WSLF3222, 0.2 mΩ, ± 1 %)

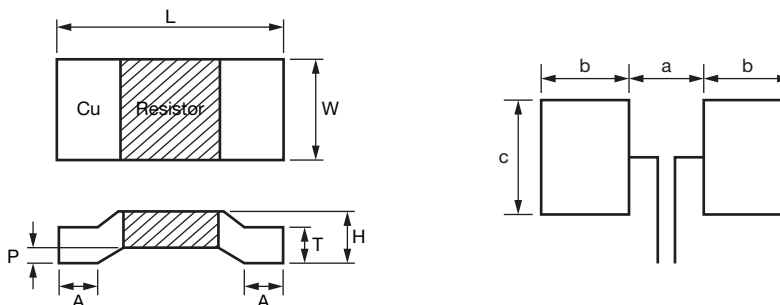
W	S	L	F	3	2	2	2	L	2	0	0	0	F	E	6		
GLOBAL MODEL (8 digits)				RESISTANCE VALUE (5 digits)				TOLERANCE CODE (1 digit)		PACKAGING CODE (2 digits)			SPECIAL (up to 2 digits)				
WSLF3222				L = decimal L2000 = 0.2 mΩ				F = ± 1.0 % J = ± 5.0 %		E6 = lead (Pb)-free, 13" tape / reel			Dash #'s 1 thru 99 as applicable				

TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	WSLF RESISTOR CHARACTERISTICS
Temperature coefficient	ppm/°C	± 250 for 0.15 mΩ
		± 200 for 0.2 mΩ, 0.27 mΩ, 0.4 mΩ and 0.5 mΩ
Operating temperature range	°C	-65 to +175
Maximum working voltage	V	$(P \times R)^{1/2}$

Notes

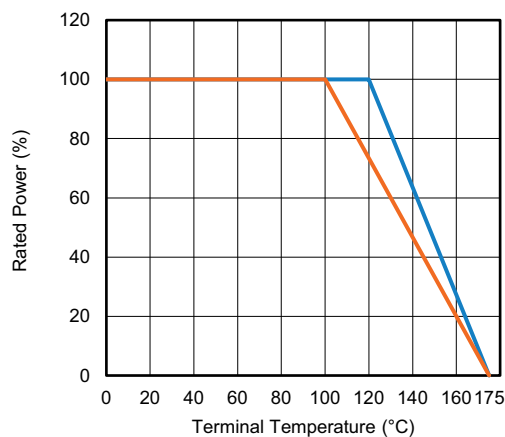
- (1) Component TCR - total TCR that includes the TCR effects of the resistor element and the copper terminal
(2) Element TCR - only applies to the alloy used for the resistor element
(3) Maximum working voltage - the WSLF is not voltage sensitive, but is limited by power / energy dissipation and is also not ESD sensitive

DIMENSIONS in inches (millimeters)

Note

- Surface mount solder profile recommendations: www.vishay.com/doc?31052

MODEL	RESISTANCE (μΩ)	DIMENSIONS						SOLDER PAD DIMENSIONS		
		L	W	H	T	A	P	a	b	c
WSLF3222	150	0.311 ± 0.004 (7.9 ± 0.1)	0.220 ± 0.015 (5.6 ± 0.38)	0.043 ± 0.006 (1.10 ± 0.15)	0.030 ± 0.006 (0.75 ± 0.15)	0.079 ± 0.008 (2.0 ± 0.2)	0.014 ± 0.006 (0.35 ± 0.15)	0.138 (3.5)	0.102 (2.6)	0.228 (5.8)
	200			0.035 ± 0.006 (0.90 ± 0.15)	0.024 ± 0.006 (0.6 ± 0.15)	0.083 ± 0.008 (2.1 ± 0.2)				
	270			0.033 ± 0.006 (0.85 ± 0.15)	0.020 ± 0.006 (0.50 ± 0.15)	0.079 ± 0.008 (2.0 ± 0.2)				
	400									
	500				0.030 ± 0.006 (0.75 ± 0.15)					

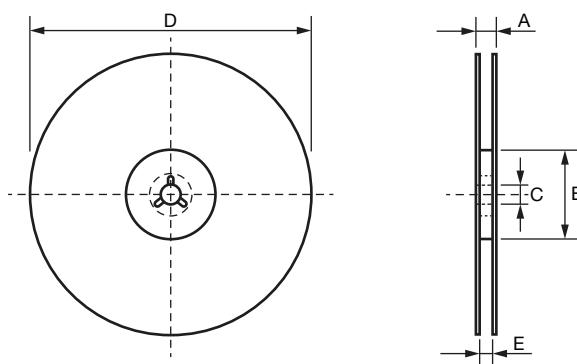
RESISTANCE VALUE ($\mu\Omega$)	ELEMENT MATERIAL	THERMAL RESISTANCE ($^{\circ}\text{C/W}$)
150	MnCuSn	2.2
200	MnCuSn	2.8
270	MnCuSn	3.2
400	MnCu	5
500	MnCu	6.2

DERATING - TERMINAL TEMPERATURE


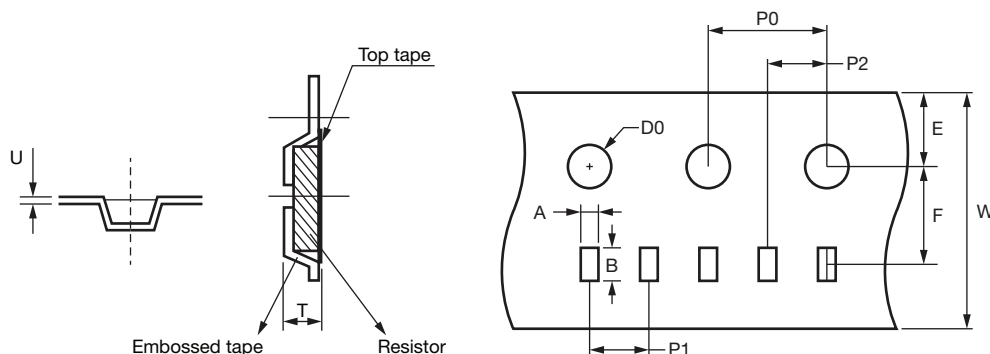
PERFORMANCE		
TEST	CONDITIONS OF TEST	TEST LIMITS
Thermal shock	-55 °C to +155 °C, 2000 cycles, 15 min at each extreme	± 1.0 %
Short time overload	Refer to link for short time overload performance and pulse capability; www.vishay.com/en/resistors/power-metal-strip-calculator/	± 1.0 %
Low temperature operation	-65 °C for 24 h	± 1.0 %
High temperature storage	2000 h at +175 °C	± 1.0 %
Bias humidity	+85 °C, 85 % RH, 10 % bias, 1000 h	± 1.0 %
Mechanical shock	100 g's for 6 ms, 5 pulses	± 1.0 %
Vibration	Frequency varied 10 Hz to 2000 Hz, 3 directions, 12 h	± 1.0 %
Operational life	2000 h, 1.5 h "ON", 0.5 h "OFF"; terminal temperature +100 °C at rated power	± 1.0 %
Resistance to solder heat	3 x at 250 °C ± 5 °C for 30 s ± 5 s	± 1.0 %
Moisture resistance	MIL-STD-202, method 106, 0 % power, 7b not required	± 1.0 %

Note

- Contact ww2bresistors@vishay.com for application specific performance requirements. Typical performance is better than stated test limits

TAPE PACKAGING SPECIFICATIONS
REEL DIMENSIONS in millimeters


MODEL	PIECES/REEL	A	B	C	D	E
WSLF3222	3000	20.7 ± 1.0	99 ± 0.5	13 ± 0.5	330 ± 1.0 / 13"	16.7 ± 1.0

EMBOSSED PLASTIC TAPE SPECIFICATIONS


MODEL	CARRIER DIMENSIONS in millimeters										
	A	B	E	F	W	P0	P1	P2	D0	T (REF.)	U (REF.)
WSLF3222	6.1 ± 0.10	8.2 ± 0.15	1.75 ± 0.1	7.5 ± 0.05	16.0 ± 0.2	4.0 ± 0.05	8.0 ± 0.1	2.0 ± 0.1	1.5 ± 0.1	1.65 ± 0.3	0.35 ± 0.2



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.