

# SNAP Analog Input Modules

## Features

- ▶ Resolution = 0.004% of nominal range
- ▶ Two, 4, 8, or 32 single-ended inputs per module
- ▶ Out-of-range indication
- ▶ Factory calibrated; no user adjustment necessary



SNAP Analog Input Modules

## Description

SNAP I/O analog input modules are part of Opto 22's SNAP PAC System. All of these modules mount on a SNAP PAC rack with a SNAP PAC brain or R-series controller, either a standard wired model or a Wired+Wireless™ model.

A minimum number of SNAP module types support a full range of analog input requirements. These software-configurable modules handle a wide variety of signal levels. They provide high resolution (0.004% of nominal range) for precise signal levels, as well as multiple-channel packaging. All SNAP analog modules are factory calibrated and individually tested. Part numbers ending in -FM are Factory Mutual approved.

SNAP analog input modules have an on-board microprocessor to provide module-level intelligence, which makes them an ideal choice for Original Equipment Manufacturers (OEMs). For additional information about the standalone operation of SNAP analog modules, see Opto 22 form #0876, *SNAP I/O Module Integration Guide*.

**Notes for legacy hardware:** Some of these modules also work with older Opto 22 I/O processors (brains or on-the-rack controllers) and M-series or B-series racks. To check processor compatibility, see the table on [page 3](#).

Specifications begin on [page 4](#). For dimensional drawings, see [pages 35–45](#).

**IMPORTANT:** Any system using analog sensors and input modules should be calibrated annually for analog signals. For I/O units on a SNAP PAC System, use the PAC Control™ commands “Calculate and Set Offset” and “Calculate and Set Gain.” For other Ethernet-based I/O units, you can also

## Part Number

| Part             | Description                                                                                                       | See page           |
|------------------|-------------------------------------------------------------------------------------------------------------------|--------------------|
| SNAP-AIARMS      | 2-channel 0 to 10 amp RMS AC/DC input                                                                             | <a href="#">4</a>  |
| SNAP-AIMA        | 2-channel analog current input, -20 to +20 mA                                                                     | <a href="#">6</a>  |
| SNAP-AIMA-4      | 4-channel analog current input -20 to +20 mA                                                                      | <a href="#">6</a>  |
| SNAP-AIMA-8      | 8-channel analog current input -20 to +20 mA                                                                      | <a href="#">8</a>  |
| SNAP-AIMA-32     | 32-channel analog current input -20 to +20 mA                                                                     | <a href="#">9</a>  |
| SNAP-AIMA-32-FM* |                                                                                                                   |                    |
| SNAP-AIRATE      | 2-channel 0–25,000 Hz analog rate input                                                                           | <a href="#">11</a> |
| SNAP-AIR40K-4    | 4-channel analog resistor/thermistor input, 40 K Ohms, 20 K Ohms, 10 K Ohms, or 5 K Ohms                          | <a href="#">13</a> |
| SNAP-AIR400K-8   | 8-channel analog resistor/thermistor input, 400 K Ohms                                                            | <a href="#">14</a> |
| SNAP-AIRTD-1K    | 2-channel 1000 ohm platinum RTD input                                                                             | <a href="#">18</a> |
| SNAP-AIRTD       | 2-channel 100 ohm platinum RTD input                                                                              | <a href="#">18</a> |
| SNAP-AIRTD-10    | 2-channel 10 ohm copper RTD input                                                                                 | <a href="#">18</a> |
| SNAP-AICTD       | 2-channel analog temperature input, ICTD                                                                          | <a href="#">20</a> |
| SNAP-AICTD-4     | 4-channel analog temperature input, ICTD                                                                          | <a href="#">20</a> |
| SNAP-AICTD-8     | 8-channel analog temperature input, ICTD                                                                          | <a href="#">22</a> |
| SNAP-AITM        | 2-channel analog type E, J, or K thermocouple or -150 to +150 mV input or -75 to +75 mV input                     | <a href="#">23</a> |
| SNAP-AITM-2      | 2-channel analog type B, C, D, G, N, T, R, or S thermocouple or -50 to +50 mV DC or -25 to +25 mV DC input        | <a href="#">24</a> |
| SNAP-AITM-8      | 8-channel B, C, D, E, G, J, K, N, R, S, or T thermocouple or -75 to +75 mV, -50 to +50 mV, or -25 to +25 mV input | <a href="#">25</a> |
| SNAP-AITM-8-FM*  |                                                                                                                   |                    |
| SNAP-AIVRMS      | 2-channel 0 to 250 V RMS AC/DC input                                                                              | <a href="#">26</a> |
| SNAP-AIV         | 2-channel analog voltage input -10 to +10 VDC or -5 to +5 VDC                                                     | <a href="#">27</a> |
| SNAP-AIV-4       | 4-channel analog voltage input -10 to +10 VDC or -5 to +5 VDC                                                     | <a href="#">27</a> |
| SNAP-AIV-8       | 8-channel analog voltage input -10 to +10 VDC or -5 to +5 VDC                                                     | <a href="#">29</a> |
| SNAP-AIV-32      | 32-channel analog voltage input -10 to +10 VDC or -5 to +5 VDC                                                    | <a href="#">30</a> |
| SNAP-AIV-32-FM*  |                                                                                                                   |                    |
| SNAP-AIMV2-4     | 4-channel -50 to +50 mV input or -25 to +25 mV input                                                              | <a href="#">32</a> |
| SNAP-AIMV-4      | 4-channel -150 to +150 mV input or -75 to +75 mV input                                                            | <a href="#">33</a> |

\* Factory Mutual approved

use PAC Manager™ software to calculate and set offset and gain.

### Isolation

All SNAP analog input modules are isolated from all other modules and from the SNAP I/O processor. The modules in this data sheet do not have channel-to-channel isolation, however. (If you need isolated analog modules, see Opto 22 form #1182.)

Transformer isolation prevents ground loop currents from flowing between field devices and causing noise that produces erroneous readings. Ground loop currents are caused when two grounded field devices share a connection, and the ground potential at each device is different.

Isolation also protects sensitive control electronics from industrial field signals.

**IMPORTANT:** Since these analog input modules provide multiple single-ended input channels with a common reference, the channels are not isolated from each other. (See Opto 22 form #1182 for isolated modules.)

### Bipolar and Unipolar Input Modules

Most SNAP analog input modules are considered to be bipolar, which means the range extends equal amounts above

## SNAP Analog Input Modules

and below zero. An example of this is the SNAP-AIV module, which has a range of -10 to +10 VDC.

Some modules are considered unipolar, which means the range starts or ends at zero. For example, the SNAP-AIVRMS module has a range of 0 to 250 VAC because AC current cannot be negative.

### Nominal Range and Over-range Limits

All SNAP analog input modules have a nominal range for the field signal and most support a 10% over-range limit. The nominal range is the normal range of the field signal for the module or point configuration. The over-range limit is the maximum valid field signal the module or point configuration can read outside of the nominal range. For example, the over-range limits for the SNAP-AIV are -11 and +11 VDC, and for the SNAP-AIVRMS, the over-range limit is 275 VAC.

Some modules or point configurations do not support field signals outside of the nominal range. For example, points configured as temperature inputs (thermocouple, RTD, ICTD) do not support over-range readings.

When the field signal is outside of the over-range limits of the module, the brain will not be able to determine if the value is too high or too low, so it will return an "out of range" value of -32768.0

Over-range limits only apply to input modules. Output modules are limited to their nominal ranges.

# SNAP Analog Input Modules

## Installation

Note module and processor compatibility in the following table:


| Modules                                                                 | Compatible I/O Processors                                                                                                                                                                                                                                 |
|-------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 32-channel inputs<br>8-channel inputs<br>SNAP-AIRTD-10<br>SNAP-AIRTD-1K | SNAP PAC R-series controllers and SNAP PAC brains, including Wired+Wireless models                                                                                                                                                                        |
| 4-channel inputs                                                        | SNAP PAC R-series controllers and SNAP PAC brains, including Wired+Wireless models<br>Also the following legacy brains:<br>SNAP Ethernet, SNAP Simple, SNAP Ultimate; SNAP-DNP-ASDS; SNAP OEM                                                             |
| 2-channel inputs<br>(except SNAP-AIRTD-10 and SNAP-AIRTD-1K)            | SNAP PAC R-series controllers and SNAP PAC brains, including Wired+Wireless models<br>Also the following legacy brains:<br>SNAP Ethernet, SNAP Simple, SNAP Ultimate; SNAP-DNP-ASDS; SNAP OEM; serial SNAP brains (B3000, Modbus, Profibus); B3000-HA; B6 |

All modules can be used with SNAP PAC racks and can be placed in any position on the rack. Two- and four-channel modules (except the SNAP-AIRTD-10 and SNAP-AIRTD-1K) can also be used with legacy SNAP M-series and B-series mounting racks. (For more information on using legacy hardware, see form #1688, the *SNAP PAC System Migration Technical Note*.)

Modules snap securely into place in the row of connectors on the mounting rack. Each module connector has a number. Analog input modules and other types of SNAP I/O modules are mounted on the module connectors starting at module position zero.

Modules require a special tool (provided) for removal.

The following diagram shows part of a SNAP PAC mounting rack.

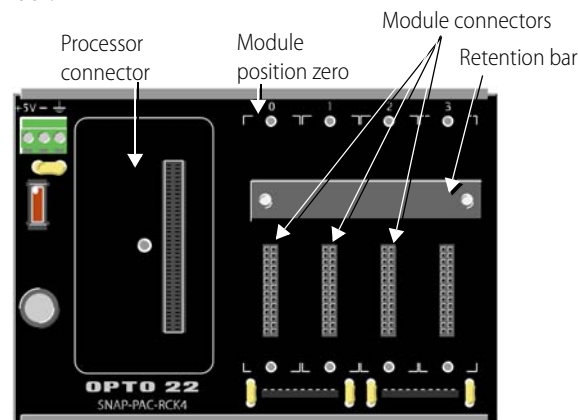

1. Place the rack so that the module connector numbers are right-side up, with zero on the left, as shown in the diagram above. (If your rack has screw connectors, the screw connectors will be at the bottom.)
2. Position the module over the module connector, aligning the small slot at the base of the module with the retention bar on the rack. When positioning modules next to each other, be sure to align the male and female module keys at the tops of the modules before snapping a module into position.
3. With the module correctly aligned, push on the module to snap it into place.
4. (Optional) Use standard 4-40 x 1/4 truss-head Phillips hold-down screws to secure both sides of each module.  
**CAUTION:** Do not over-tighten screws.
5. Follow the wiring diagrams beginning on [page 4](#) to attach modules to the devices they monitor. Most modules accept 22 to 14 AWG wire; the SNAP-AITM-8 accepts a maximum of two solid 18 AWG wires.

**For faster, easier field wiring** installation and maintenance, use **SNAP TEX** cables and breakout boards. See Opto 22 form #1756, the *SNAP TEX Cables & Breakout Boards Data Sheet*, for compatibility and specifications.

## 0 to 10 Amp RMS AC/DC Input Module

### Description

The SNAP-AIARMS module provides an input range of 0 to 10 amps RMS AC/DC. An ideal input is the 5-amp secondary of a standard current transformer used to monitor AC line current.

The SNAP-AIARMS module may be used to monitor AC current to greater than a 100-amp range, using a current transformer of suitable ratio.

If you need a module with channel-to-channel isolation, see form #1182, the *SNAP Isolated Analog Input Modules Data Sheet*.

**Wiring diagrams** are on the following page.



## SNAP Analog Input Modules

| Part Number | Description                             |
|-------------|-----------------------------------------|
| SNAP-AIARMS | Two-channel 0 to 10 amp RMS AC/DC input |

### Specifications

|                                       |                                                |
|---------------------------------------|------------------------------------------------|
| Input Range                           | 0 to 10 amp RMS AC/DC                          |
| Input Over-Range                      | To 11 amps                                     |
| Input Resistance                      | 0.005 ohms                                     |
| Maximum Input                         | 11 amps AC/DC                                  |
| Accuracy (AC)                         | ±8 mA and ±0.2% reading                        |
| Resolution                            | 400 microamps                                  |
| DC Reversal                           | ±16 mA (0.16%)                                 |
| Input Response Time (Step Change)     | 63.2% (158 V) in 50 mS<br>99% (248 V) in 75 mS |
| Data Freshness (Max)                  | 32.3 ms                                        |
| DC Common Mode Rejection              | >-120 dB                                       |
| AC Common Mode Rejection              | >-120 dB at 60 Hz                              |
| Maximum Operating Common Mode Voltage | 250 V                                          |
| Isolation                             | 1500 V                                         |
| Power Requirements                    | 5 VDC (±0.15 V) at 170 mA                      |
| Operating Temperature                 | 0 °C to 70 °C                                  |
| Storage Temperature                   | -40 °C to 85 °C                                |
| Wire size                             | 22 to 14 AWG                                   |
| Torque, hold-down screws              | 4 in-lb (0.45 N-m)                             |
| Torque, connector screws              | 5.26 in-lb (0.6 N-m)                           |
| Agency Approvals                      | UL, FM, CE, RoHS, DFARS                        |
| Warranty                              | Lifetime                                       |




# SNAP Analog Input Modules

## 0 to 10 Amp RMS AC/DC Input Module (continued)

### SNAP-AIARMS Wiring Diagrams

Two possible wiring diagrams are shown below.

Terminals 3, 4, 7, and 8 share a common connection inside the module. **Make sure you observe polarity** when connecting the second channel. To avoid a potentially hazardous short, double-check wiring before turning on the current to be monitored.

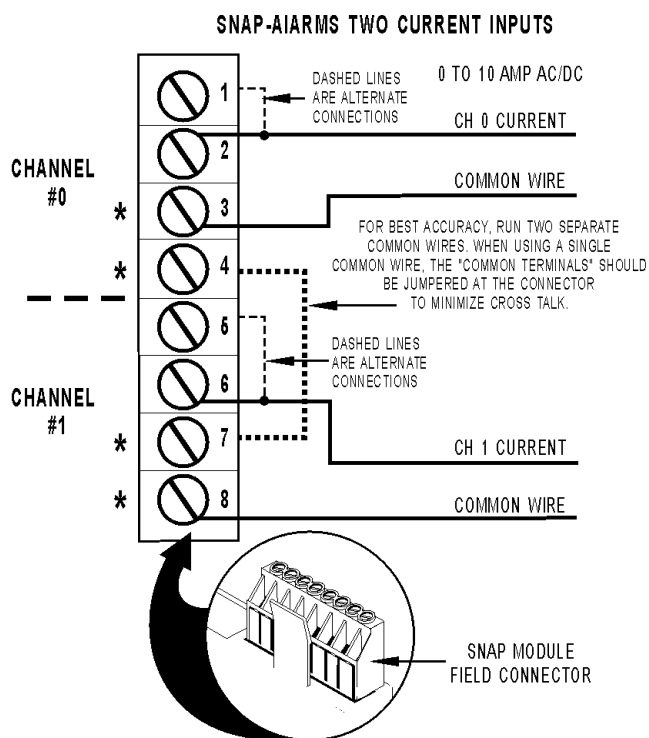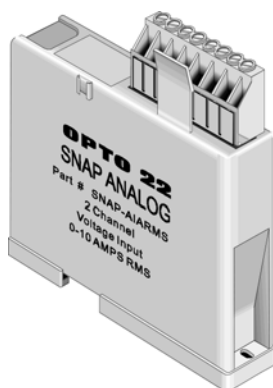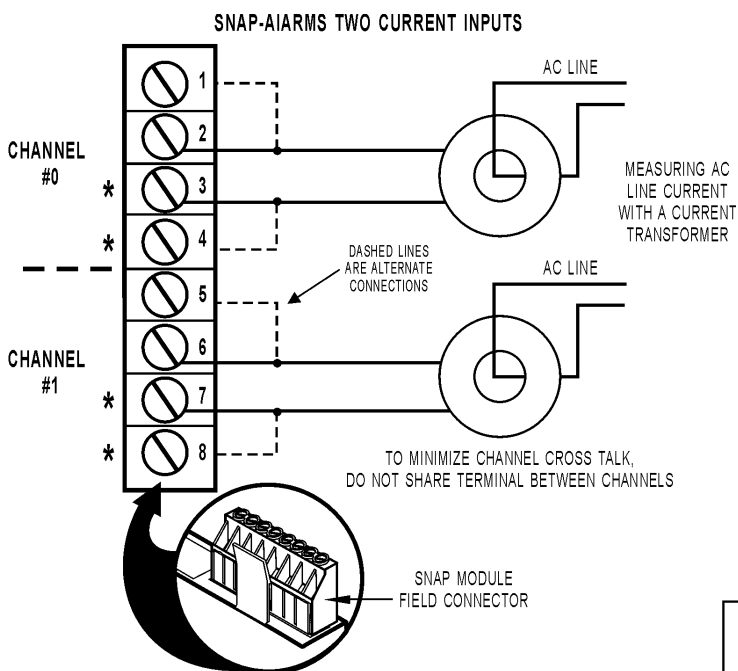

# SNAP Analog Input Modules

## Current Input Module, -20 mA to +20 mA, Two or Four Channels

### Specifications

|                                                    |                                          |
|----------------------------------------------------|------------------------------------------|
| Input Range                                        | -20 mA to +20 mA                         |
| Resolution                                         | 0.8 microamps                            |
| Over-Range Limits                                  | From -22 to +22 mA (+/-20 mA range)      |
| Input Response Time (% of span/ delta I/delta tme) | 99.9% / 19.9 mA / 10 ms                  |
| Data Freshness (Max)                               | SNAP-AIMA: 11.5 ms<br>SNAP-AIMA-4: 23 ms |
| DC Common Mode Rejection                           | >-120 dB                                 |
| AC Common Mode Rejection                           | >-120 dB @ 60 Hz                         |
| Maximum Survivable Input                           | 36 mA or 9 VDC                           |
| Maximum Operating Common Mode Voltage              | 250 V                                    |
| Accuracy                                           | 0.05% (10 microamps)                     |
| DRIFT: Gain Temperature Coefficient                | 30 PPM/ °C                               |
| DRIFT: Offset Temperature Coefficient              | 15 PPM/ °C                               |
| Power Requirements                                 | 5 VDC (±0.15 ) @ 170 mA                  |
| Input Resistance - Single Ended                    | 200 ohms (each channel)                  |
| Operating Temperature                              | -20 °C to 70 °C                          |
| Storage Temperature                                | -40 °C to 85 °C                          |
| Torque, hold-down screws                           | 4 in-lb (0.45 N-m)                       |
| Torque, connector screws                           | 5.26 in-lb (0.6 N-m)                     |
| Wire size                                          | 22 to 14 AWG                             |
| Agency Approvals                                   | UL, FM, CE, RoHS, DFARS                  |
| Warranty                                           | Lifetime                                 |

| Part Number | Description                                         |
|-------------|-----------------------------------------------------|
| SNAP-AIMA   | Two-channel analog current input, -20 mA to +20 mA  |
| SNAP-AIMA-4 | Four-channel analog current input, -20 mA to +20 mA |


### Description

The SNAP-AIMA and SNAP-AIMA-4 modules provide an input range of -20mA to +20mA. The SNAP-AIMA has two channels, and the SNAP-AIMA-4 has four. If you need a similar module with more channels, see [page 9](#). Check the table on [page 3](#) for I/O processor compatibility. These modules DO NOT supply loop excitation current.

Since all inputs share a common reference, the module must be installed at the beginning or end of a typical 4–20mA loop. If you are using both standard and self-sourcing transmitters, either put the transmitters on different power supplies, or use different power supplies. If you need channels that are isolated from each other on the same module, see Opto 22 form #1182.



### SNAP-AIMA Wiring (Two channels)

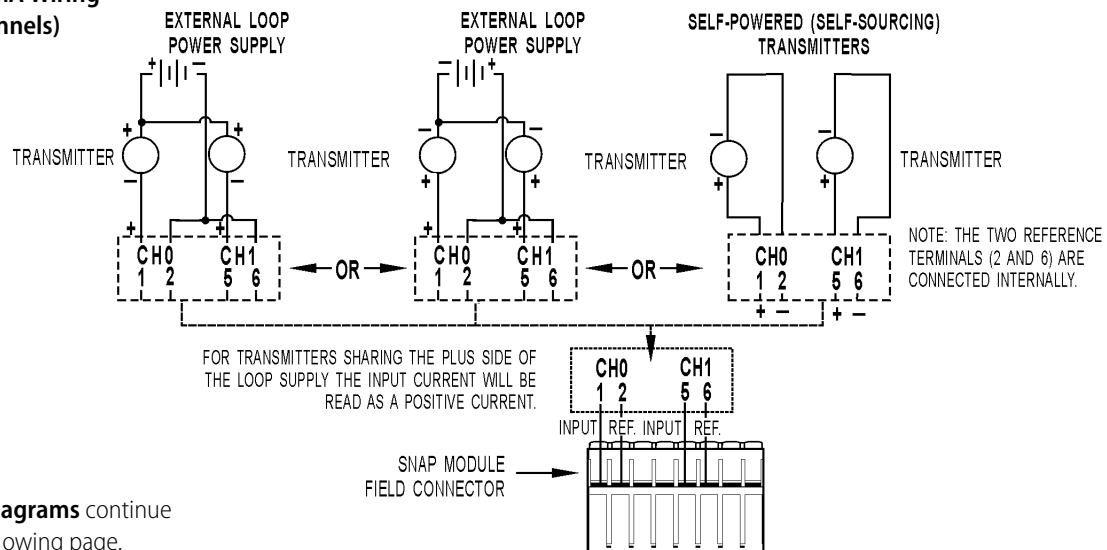


Wiring diagrams continue on the following page.

# SNAP Analog Input Modules


## Current Input Module, -20 mA to +20 mA, Two or Four Channels (continued)

### SNAP-AIMA-4 Wiring (Four channels)

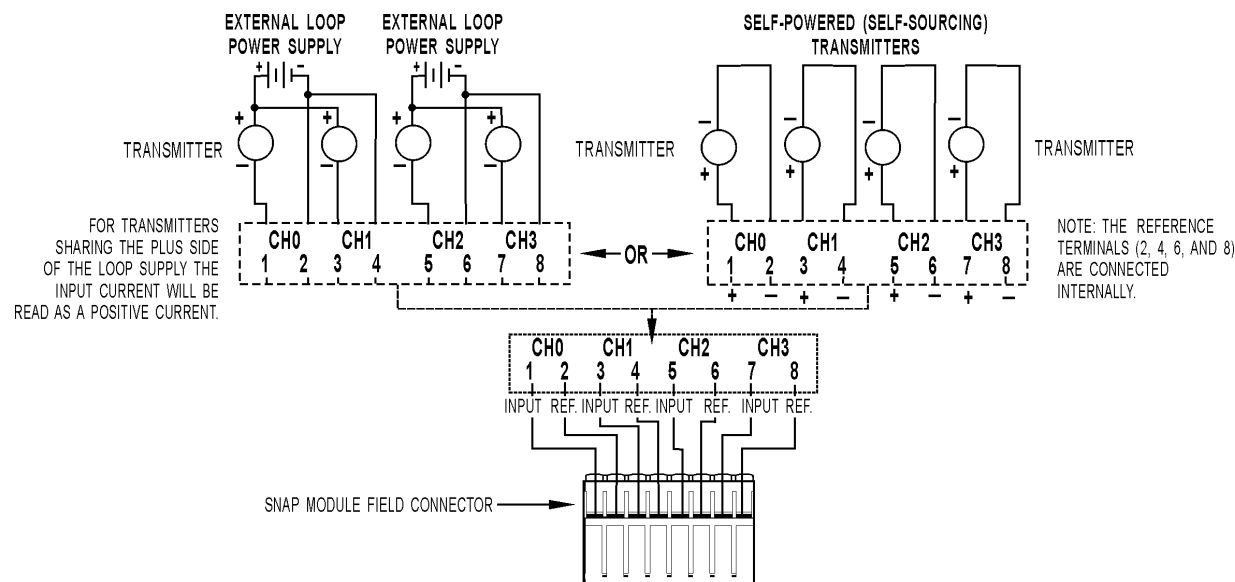


### SNAP-AIMA Wiring: Positive Common vs. Negative Common Connections

The following diagrams apply to SNAP-AIMA-2, SNAP-AIMA-4, and SNAP-AIMA-8 modules.

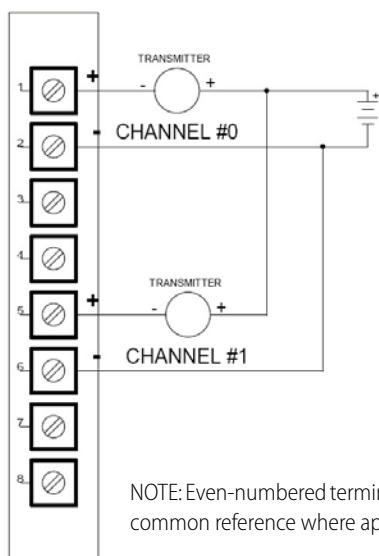

#### SNAP-AIMA

For transmitters sharing the plus side of the loop supply. Note that input current will be read as a positive current.

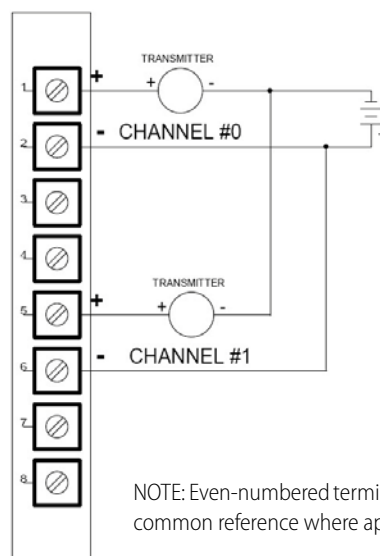


#### SNAP-AIMA

For transmitters sharing the minus side of the loop supply. Note that input current will be read as a negative current.

# SNAP Analog Input Modules

## Current Input Module, -20 mA to +20 mA, Eight Channels

### SNAP-AIMA-8

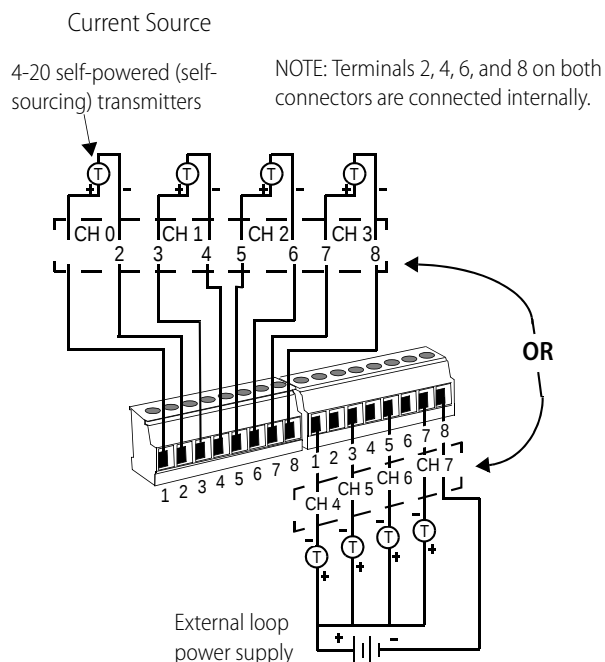

NOTE: For transmitters sharing the plus side of the loop power supply, the input current will be read as a positive current.

See additional wiring diagrams on [page 7](#).

### Description

The SNAP-AIMA-8 module provides an input range of -20mA to +20mA with eight channels of analog current input. (If you need a similar module with 32 channels, see [page 9](#).) The SNAP-AIMA-8 can be used with SNAP PAC brains and rack-mounted controllers only. These modules DO NOT supply loop excitation current.


Since all inputs share a common reference, the module must be installed at the beginning or end of a typical 4–20mA loop. If you are using both standard and self-sourcing transmitters, either put the transmitters on different modules or use different power supplies. If you need channels that are isolated from each other on the same module, see Opto 22 form #1182.

If you have multiple self-sourcing transmitters that share the same positive common, do not use this module. Use the SNAP-AIMA-i module instead. See Opto 22 form #1182.

| Part Number | Description                                          |
|-------------|------------------------------------------------------|
| SNAP-AIMA-8 | Eight-channel analog current input, -20 mA to +20 mA |

### Specifications

|                                       |                                                        |
|---------------------------------------|--------------------------------------------------------|
| Input Range                           | -20 mA to +20 mA                                       |
| Over-Range Limits                     | From -22 to +22 mA (+/-20 mA range)                    |
| Resolution                            | 0.8 microamps                                          |
| Data Freshness (Max)                  | 0.28 seconds                                           |
| DC Common Mode Rejection              | >-120 dB                                               |
| AC Common Mode Rejection              | >-120 dB @ 60 Hz                                       |
| Maximum Survivable Input              | 36 mA or 9 VDC                                         |
| Maximum Operating Common Mode Voltage | 250 V                                                  |
| Accuracy                              | 0.05% (10 microamps)                                   |
| DRIFT: Gain Temperature Coefficient   | 30 PPM/ °C                                             |
| DRIFT: Offset Temperature Coefficient | 15 PPM/ °C                                             |
| Isolation                             | 1500 V                                                 |
| Power Requirements                    | 5 VDC (±0.15 ) @ 170 mA                                |
| Input Resistance - Single Ended       | 100 ohms (all channels share the same reference point) |
| Operating Temperature                 | 0 °C to 70 °C                                          |
| Storage Temperature                   | -40 °C to 85 °C                                        |
| Torque, hold-down screws              | 4 in-lb (0.45 N-m)                                     |
| Torque, connector screws              | 1.7 in-lb (0.19 N-m)                                   |
| Agency Approvals                      | CE, RoHS, DFARS                                        |
| Warranty                              | Lifetime                                               |

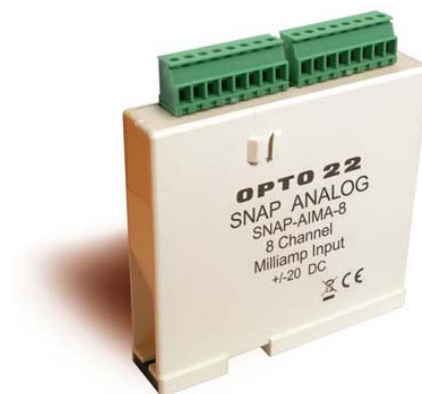

# SNAP Analog Input Modules

## Current Input Module, -20 mA to +20 mA, 32 Channels

### Specifications

|                                       |                                                                            |
|---------------------------------------|----------------------------------------------------------------------------|
| Input Range                           | -20 mA to +20 mA                                                           |
| Over-Range Limits                     | From -22 to +22 mA (+/-20 mA range)                                        |
| Resolution                            | 0.8 microamps                                                              |
| Input Filtering                       | -3 dB @ 31 Hz                                                              |
| Data Freshness (Max)                  | 1.15 s                                                                     |
| DC Common Mode Rejection              | >-120 dB                                                                   |
| AC Common Mode Rejection              | >-120 dB @ 60 Hz                                                           |
| Maximum Survivable Input              | 36 mA or 9 VDC                                                             |
| Maximum Operating Common Mode Voltage | 250 V                                                                      |
| Accuracy                              | 0.1% (20 microamps)                                                        |
| DRIFT: Gain Temperature Coefficient   | 30 PPM/ °C                                                                 |
| DRIFT: Offset Temperature Coefficient | 15 PPM/ °C                                                                 |
| Isolation                             | 1500 V, field to logic                                                     |
| Power Requirements                    | 5 VDC (±0.15 ) @ 150 mA                                                    |
| Input Resistance - Single Ended       | 100 ohms (each channel)                                                    |
| Operating Temperature                 | 0 °C to 70 °C                                                              |
| Storage Temperature                   | -40 °C to 85 °C                                                            |
| Torque, hold-down screws              | 4 in-lb (0.45 N-m)                                                         |
| Torque, connector screws              | 5.26 in-lb (0.6 N-m)                                                       |
| Agency Approvals                      | SNAP-AIMA-32: UL, CE, RoHS, DFARS.<br>SNAP-AIMA-32-FM: CE, FM, RoHS, DFARS |
| Warranty                              | Lifetime                                                                   |

### Description

The SNAP-AIMA-32 and SNAP-AIMA-32-FM modules provide 32 channels of input with an input range of -20mA to +20mA. The SNAP-AIMA-32-FM is Factory Mutual approved. Check the table on [page 3](#) for I/O processor compatibility. Dimensional drawings are on [page 39](#).



These modules DO NOT supply loop excitation current.

Channels are not isolated from each other. Since all inputs share a common reference, the module must be installed at the beginning or end of a typical 4–20 mA loop. If you use both standard and self-sourcing transmitters, put the

transmitters on different modules or use different power supplies. (If you need channels that are isolated from each other on the same module, see Opto 22 form #1182.)

| Part Number                       | Description                                                |
|-----------------------------------|------------------------------------------------------------|
| SNAP-AIMA-32<br>SNAP-AIMA-32-FM   | 32-channel analog current input, -20 mA to +20 mA          |
| SNAP-HD-BF6                       | Wiring harness for SNAP-AIMA-32 modules and breakout racks |
| SNAP-AIMA-HDB<br>SNAP-AIMA-HDB-FM | Breakout racks for SNAP-AIMA-32 and SNAP-AIMA-32-FM        |

### Wiring

SNAP TEX cables and a breakout rack are available separately for wiring points to field devices (see form #1756, the *SNAP TEX Cables & Breakout Boards Data Sheet*). The SNAP-HD-BF6 cable connects the module to the breakout rack, which can then be wired to field devices. (NOTE: The SNAP-HD-CBF6 wiring harness with flying leads is not recommended for this module.)

**CAUTION:** We strongly recommend that you use the breakout rack with these modules. Miswiring of any point on the module can cause severe out-of-warranty damage. The breakout rack protects the module from many wiring errors.

if you are using the module with loop power (2-wire) negative common devices, connect to the SNAP-AIMA-HDB (or -FM) rack. If you are using the module with self-powered devices (4-wire) or with devices that share a common positive connection, do not use the SNAP-AIMA-HDB (or -FM) boards, which have a current limiting diode. Instead, wire to the SNAP-AIV-HDB or SNAP-AIV-HDB-FM.

### Correcting for Inverted Scaling

Positive readings for these modules appear as negative values. Therefore, in order to obtain meaningful readings, use the scaling feature in PAC Control as follows:

1. In the Add or Edit Analog Point dialog box for each point, choose the scalable version of the module.
2. Under Scaling, scale each point negatively as shown below:

# SNAP Analog Input Modules

## Current Input Module, -20 mA to +20 mA, 32 Channels (continued)


### Wiring diagram: SNAP-AIMA-HDB breakout rack to SNAP-AIMA-32 module

NOTE: This diagram also applies to the SNAP-AIMA-HDB-FM rack and the SNAP-AIMA-32-FM module.

Use with loop power (2-wire) negative common devices only.

For self-powered (4-wire) devices, see [page 31](#).

For positive common devices, see [page 34](#).

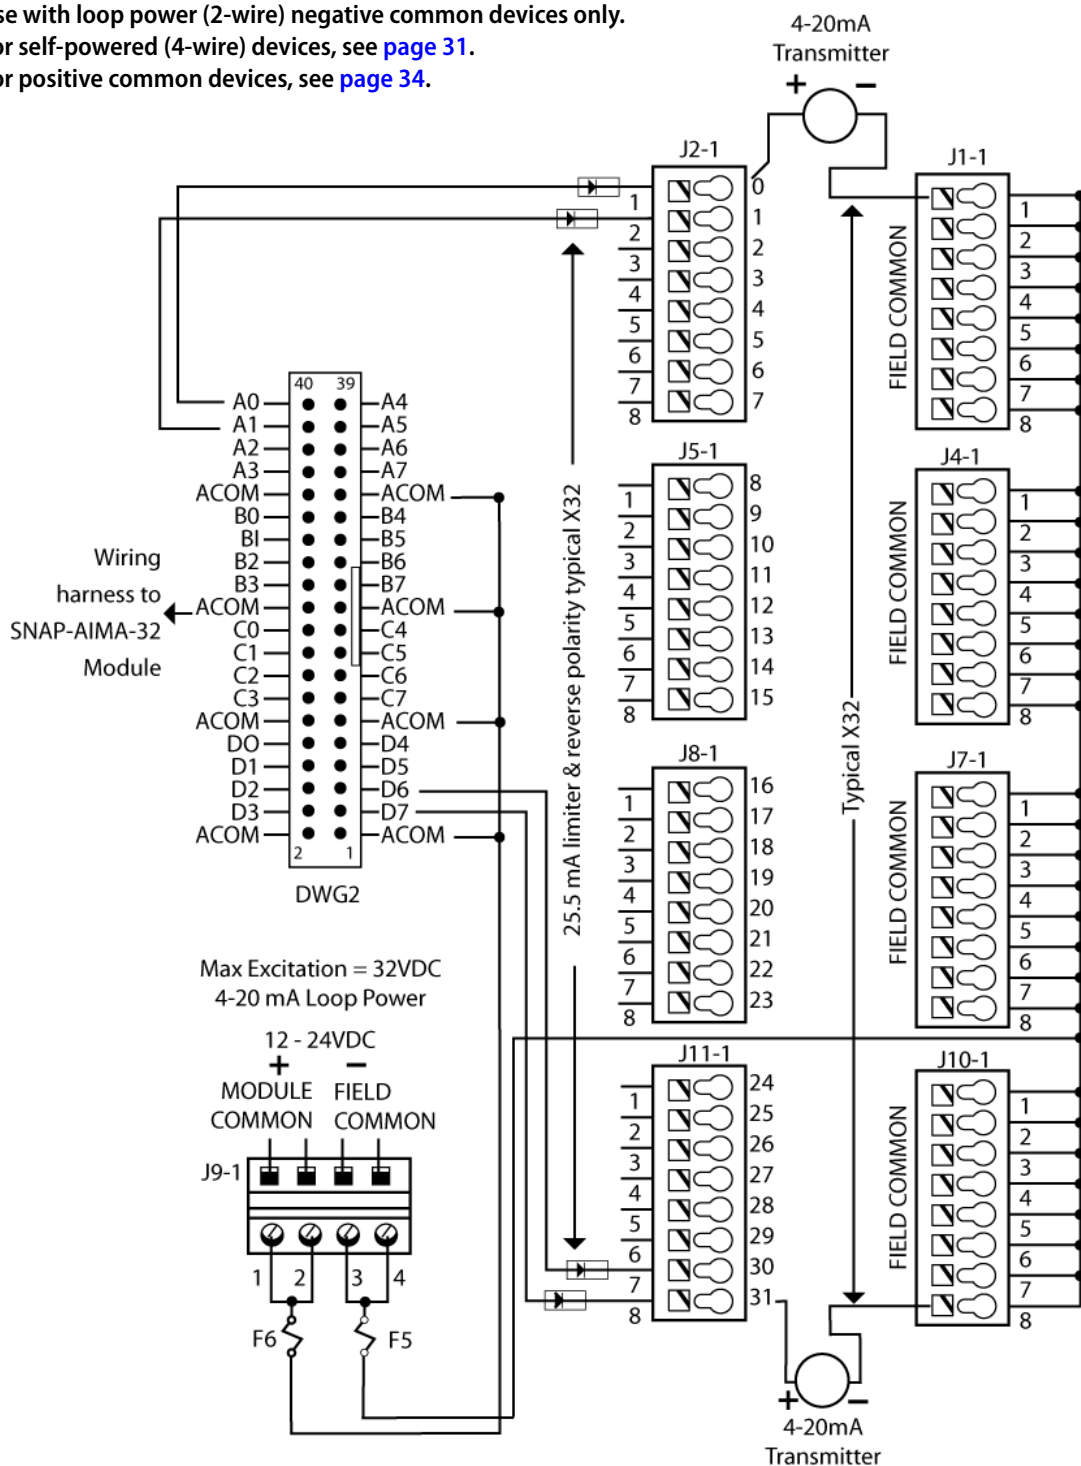

# SNAP Analog Input Modules

## 0 to 25,000 Hz Analog Rate Input Module

### Specifications

|                                                                                                 |                                                                                           |
|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Nominal Input Range                                                                             | 0 to 25,000 Hz                                                                            |
| Input Over-Range                                                                                | To 27,500 Hz                                                                              |
| Resolution                                                                                      | 1 Hz                                                                                      |
| Input Response Time(% of span / delta Hz / delta time)                                          | 10.0% / 2,500 Hz / 0.1 sec<br>63.2% / 15.8 K Hz / 0.9 sec<br>99.0% / 24.75 K Hz / 4.2 sec |
| Data Freshness (Max)                                                                            | 126 ms                                                                                    |
| DC Common Mode Rejection                                                                        | > -120 dB                                                                                 |
| AC Common Mode Rejection                                                                        | > -120 dB at 60 Hz                                                                        |
| Maximum Operating Common Mode Voltage                                                           | 250 V                                                                                     |
| Accuracy (% full scale)                                                                         | ±4 Hz or ±0.5% of the input frequency (whichever is greater)                              |
| Drift: Gain Temperature Coefficient                                                             | 200 ppm / °C                                                                              |
| Drift: Offset Temperature Coefficient                                                           | 50 ppm / °C                                                                               |
| Input Coupling                                                                                  | Single-ended AC (capacitor coupled)                                                       |
| Input Amplitude<br>Sine wave<br>Square wave                                                     | 2.5 V to 24 V p-p<br>0.5 V to 24 V p-p                                                    |
| Minimum Pulse Width                                                                             | 18 microseconds                                                                           |
| Input Impedance (Inputs share the same reference point.)<br>Pull-up Voltage<br>Pull-up Resistor | 50 K ohms AC coupled<br>(-input to +input)<br>6 to 9 V<br>4.7 K ohms                      |
| Isolation                                                                                       | 1500 V                                                                                    |
| Power Requirements                                                                              | 5 VDC (±0.15 V) at 190 mA                                                                 |
| Operating Temperature                                                                           | 0 °C to 70 °C                                                                             |
| Storage Temperature                                                                             | -40 °C to 85 °C                                                                           |
| Wire size                                                                                       | 22 to 14 AWG                                                                              |
| Torque, hold-down screws                                                                        | 4 in-lb (0.45 N-m)                                                                        |
| Torque, connector screws                                                                        | 5.26 in-lb (0.6 N-m)                                                                      |
| Agency Approvals                                                                                | UL, FM, CE, RoHS, DFARS                                                                   |
| Warranty                                                                                        | Lifetime                                                                                  |

| Part Number | Description                   |
|-------------|-------------------------------|
| SNAP-AIRATE | 0–25,000 Hz analog rate input |

### Description

The SNAP-AIRATE module provides two channels of frequency-to-digital conversion. The nominal input range is 0 to 25,000 Hz with an over-range capability to 27,500 Hz. Nine volts through a 4.7 K ohm pull-up resistor are provided internally for use with devices that have open collector outputs. This feature eliminates the need for the user to provide the pull-up voltage supply and associated wiring, barrier strips, etc.

The module works with TTL, CMOS, and open collector outputs. Truly a two-wire hookup, the SNAP-AIRATE module is ideally suited for use with a tachometer.



Please note that this module does not provide channel-to-channel isolation. If you need isolated channels, see the [SNAP Isolated Analog Input Modules Data Sheet](#), form 1182.



# SNAP Analog Input Modules

## 0 to 25,000 Hz Analog Rate Input Module (continued)

SNAP-AIRATE Wiring Diagrams

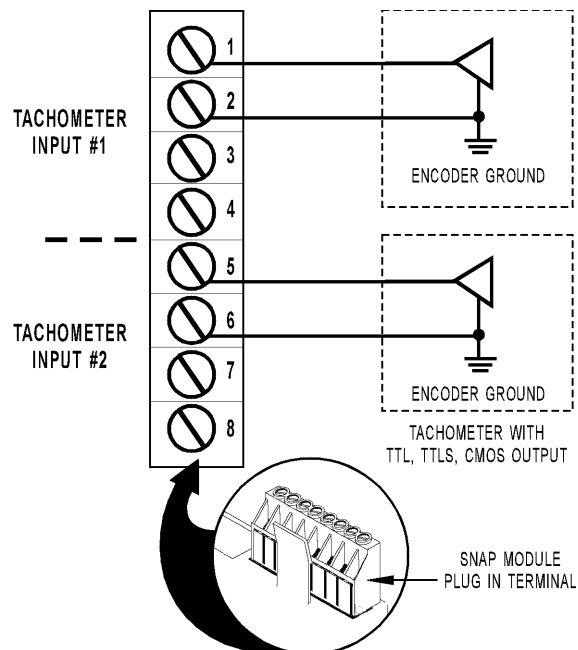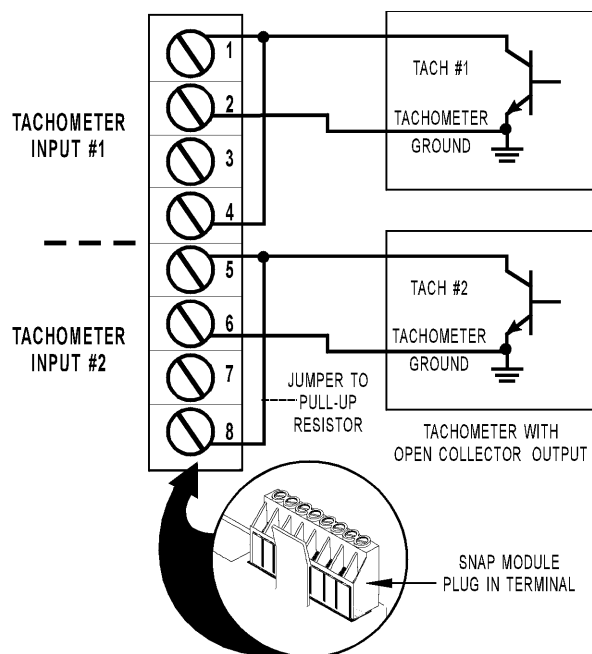


NOTE: This module does not provide channel-to-channel isolation.

# SNAP Analog Input Modules

## Thermistor Input Module 0–40 K, 0–20 K, 0–10 K, or 0–5 K Ohm

### SNAP-AIR40K-4

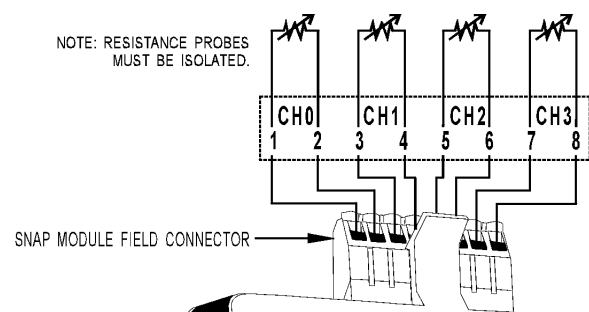

IMPORTANT: The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AIR40K-4 module provides four channels of analog to digital conversion, ideal for thermistors used in HVAC applications or for reading the resistance of potentiometer input. See the table on [page 3](#) for I/O processor compatibility.

The default input range is 0 to 40 K Ohms. The module can also be configured for 0 to 20 K, 0 to 10 K, or 0 to 5 K Ohms.

NOTE: Resistance probes must be isolated from each other.




| Part Number   | Description                                                                                 |
|---------------|---------------------------------------------------------------------------------------------|
| SNAP-AIR40K-4 | Four-channel analog resistor/thermistor input, 40 K Ohms, 20 K Ohms, 10 K Ohms, or 5 K Ohms |

### Specifications

|                                       |                                                                                                                    |
|---------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| Input Range                           | 0 to 40,000 Ohms<br>0 to 20,000 Ohms<br>0 to 10,000 Ohms<br>0 to 5,000 Ohms                                        |
| Maximum Over-Range                    | 44 K (40 K Ohms range)<br>22 K (20 K Ohms range)<br>11 K (10 K Ohms range)<br>5.5 K (5 K Ohms range)               |
| Resolution                            | 1.6 Ohm @ 40 K Ohms<br>0.8 Ohm @ 20 K Ohms<br>0.4 Ohm @ 10 K Ohms<br>0.2 Ohm @ 5 K Ohms                            |
| Input Filtering                       | -3 dB @ 3.2 Hz                                                                                                     |
| Data Freshness (Max)                  | 100 (40 K Ohms)<br>200 (20 K Ohms)<br>400 (10 K Ohms)<br>800 (5 K Ohms)                                            |
| DC Common Mode Rejection              | >-120 dB                                                                                                           |
| AC Common Mode Rejection              | >-120 dB @ 60 Hz                                                                                                   |
| Maximum Operating Common Mode Voltage | 250 V                                                                                                              |
| Accuracy                              | 0.1% ± 40 Ohms @ 40 K Ohms<br>0.1% ± 20 Ohms @ 20 K Ohms<br>0.1% ± 10 Ohms @ 10 K Ohms<br>0.1% ± 5 Ohms @ 5 K Ohms |
| DRIFT: Gain Temperature Coefficient   | 30 PPM/ °C                                                                                                         |
| DRIFT: Offset Temperature Coefficient | 15 PPM/ °C                                                                                                         |
| Isolation                             | 1500 V                                                                                                             |
| Power Requirements                    | 5 VDC (±0.15 ) @ 190 mA                                                                                            |
| Operating Temperature                 | 0 °C to 70 °C                                                                                                      |
| Storage Temperature                   | -40 °C to 85 °C                                                                                                    |
| Wire size                             | 22 to 14 AWG                                                                                                       |
| Torque, hold-down screws              | 4 in-lb (0.45 N-m)                                                                                                 |
| Torque, connector screws              | 5.26 in-lb (0.6 N-m)                                                                                               |
| Agency Approvals                      | UL, FM, CE, RoHS, DFARS                                                                                            |
| Warranty                              | Lifetime                                                                                                           |

## Thermistor Input Module 0–400 K, 0–200 K, 0–100 K, 0–50 K, 0–40 K, 0–20 K, 0–10 K, 0–5 K, 0–4 K, 0–2 K, 0–1 K, 0–500 Ohm

### SNAP-AIR400K-8

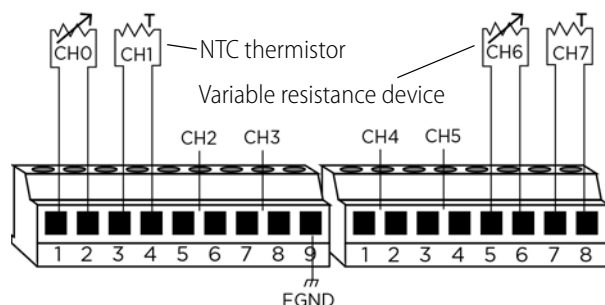

**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AIR400K-8 module has eight channels of analog to digital conversion that convert resistance to temperature or to Ohms. The module is ideal for NTC thermistors commonly used in HVAC, refrigeration, and process control applications. It may also be used with PTC thermistors in resistance sensing applications. See the table on [page 3](#) for I/O processor compatibility.



## SNAP Analog Input Modules

| Part Number    | Description                                                                                                                                                                      |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAP-AIR400K-8 | Eight channel analog resistor/thermistor input, 400 K Ohms, 200 K Ohms, 100 K Ohms, 50 K Ohms, 40 K Ohms, 20 K Ohms, 10 K Ohms, 5 K Ohms, 4 K Ohms, 2 K Ohms, 1 K Ohms, 500 Ohms |

The SNAP-AIR400K-8 reads variable resistance type transducers, and it has 12 resistance input ranges from 500 Ohms to 400 K Ohms, plus Autorange. Range dependent resolution is from 20 milliOhms to 16 Ohms.

SNAP PAC brains and PAC Control provide direct temperature readings for four popular thermistors using the [Steinhart-Hart equation](#) (see [page 16](#)). You may also enter custom coefficients for unsupported thermistor curves.


The simple two-wire connections are made to the pluggable terminal strip on top of the module.

*NOTE: The eight input channels must be electrically isolated from each other and earth ground. The transducer resistor element must be isolated from any electrically conducting probe tube housing.*

See [page 15](#) for module specifications.

### Wiring Information

Unshielded 24 AWG wire (minimum) is recommended.

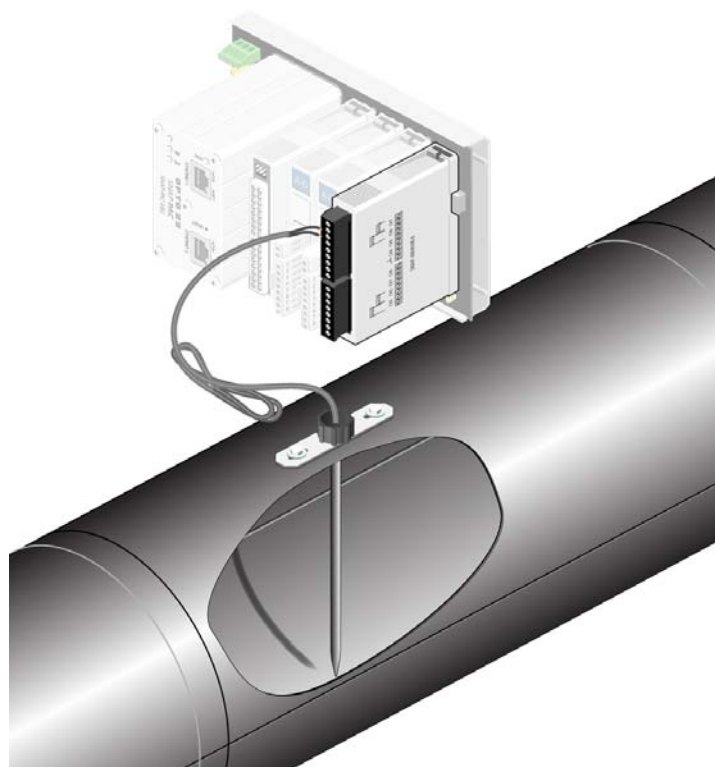

# SNAP Analog Input Modules

## Thermistor Input Module 0–400 K (continued)

### Specifications

|                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------|------|------|--------|-----|---------|-------------|-----|---------|-------------|----|---------|------------|-----|---------|-----------|----|---------|-----------|----|---------|-----------|-----|---------|----------|------|---------|---------|-----|---------|---------|-----|---------|---------|----|---------|----------|
| Input Ranges                                                                | 400 K, 200 K, 100 K, 50 K, 40 K, 20 K, 10 K, 5 K , 4 K, 2 K, 1 K, 500 Ohms, and Autorange                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Fixed Range Overrange Limits (Ohms Resolution)                              | 440 K (16), 220 K (8), 110 K (4), 55 K (2), 44 K (1.6), 22 K (0.8), 11 K (0.4), 5.5 K (0.2), 4.4 K (0.16), 2.2 K (0.08), 1.1 K (0.04), 550 (0.02)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Data Freshness                                                              | 1.61 seconds maximum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| DSP Notch Filter                                                            | 20 Hz (- 3DB = 5.24 Hz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Excitation Current Nominal (Range & Load Watts Dissipation)                 | 9uA (50 K–4.1 uW), (100 K–8.1 uW), (200 K–16 uW), (400 K–32 uW)<br>90uA (5 K–40 uW), (10 K–81 uW), (20 K–160 uW), (40 K–320 uW)<br>200uA (500 K–20 uW), (1 K–40 uW), (2 K–80 uW), (4 K–160 uW)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Autorange Step Time                                                         | 1.6 seconds to next higher or lower range<br>>= 10 seconds for a 500 Ohms to 400 K Ohms step change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Autorange Ohms Hysteresis                                                   | <div>Ranges</div> <table><tr><td>Ohms</td><td>Open</td><td>&gt; 440K</td></tr><tr><td>20K</td><td>between</td><td>200K &amp; 400K</td></tr><tr><td>10K</td><td>between</td><td>100K &amp; 200K</td></tr><tr><td>5K</td><td>between</td><td>50K &amp; 100K</td></tr><tr><td>19K</td><td>between</td><td>40K &amp; 50K</td></tr><tr><td>2K</td><td>between</td><td>20K &amp; 40K</td></tr><tr><td>1K</td><td>between</td><td>10K &amp; 20K</td></tr><tr><td>500</td><td>between</td><td>5K &amp; 10K</td></tr><tr><td>1.9K</td><td>between</td><td>4K &amp; 5K</td></tr><tr><td>200</td><td>between</td><td>2K &amp; 4K</td></tr><tr><td>100</td><td>between</td><td>1K &amp; 2K</td></tr><tr><td>50</td><td>between</td><td>500 &amp; 1K</td></tr></table> |                                                                    |                                                                           | Ohms | Open | > 440K | 20K | between | 200K & 400K | 10K | between | 100K & 200K | 5K | between | 50K & 100K | 19K | between | 40K & 50K | 2K | between | 20K & 40K | 1K | between | 10K & 20K | 500 | between | 5K & 10K | 1.9K | between | 4K & 5K | 200 | between | 2K & 4K | 100 | between | 1K & 2K | 50 | between | 500 & 1K |
| Ohms                                                                        | Open                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | > 440K                                                             |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 20K                                                                         | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 200K & 400K                                                        |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 10K                                                                         | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 100K & 200K                                                        |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 5K                                                                          | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 50K & 100K                                                         |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 19K                                                                         | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 40K & 50K                                                          |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 2K                                                                          | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 20K & 40K                                                          |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 1K                                                                          | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 10K & 20K                                                          |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 500                                                                         | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 5K & 10K                                                           |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 1.9K                                                                        | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 4K & 5K                                                            |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 200                                                                         | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2K & 4K                                                            |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 100                                                                         | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1K & 2K                                                            |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| 50                                                                          | between                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 500 & 1K                                                           |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| DC Common Mode Rejection                                                    | >-120 dB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| AC Common Mode Rejection                                                    | >-120 dB @ 60 Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Open Resistor Indicator                                                     | Channel resistance = 999,999.999                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| PAC Control Reads                                                           | temperature reading or -32768 Ohms if over or under range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Maximum Operating Common Mode Voltage (Field Term to Logic Connector)       | 500 VDC or peak VAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Accuracy (Ohms @ Range)<br>0.1% Reading<br>+ 2x Range Resolution<br>+ 1 Ohm | 4 Ohms @ 4 K<br>2 Ohms @ 2 K<br>1 Ohms @ 1 K<br>0.5 Ohms @ 500                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 40 Ohms @ 40 K<br>20 Ohms @ 20 K<br>10 Ohms @ 10 K<br>5 Ohms @ 5 K | 400 Ohms @ 400 K<br>200 Ohms @ 200 K<br>100 Ohms @ 100 K<br>0 Ohms @ 50 K |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Drift<br>Gain Tempco<br>Offset Tempco                                       | 30 PPM / °C<br>15 PPM / °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Power Requirements                                                          | 5 VDC (±0.15 ) @ 190 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Operating Temperature                                                       | 0 °C to 70 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Storage Temperature                                                         | -40 °C to 85 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Torque, hold-down screws                                                    | 4 in-lb (0.45 N-m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Torque, connector screws                                                    | 5.26 in-lb (0.6 N-m)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Agency Approvals                                                            | UL (pending), CE (pending)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |
| Warranty                                                                    | Lifetime                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    |                                                                           |      |      |        |     |         |             |     |         |             |    |         |            |     |         |           |    |         |           |    |         |           |     |         |          |      |         |         |     |         |         |     |         |         |    |         |          |

# SNAP Analog Input Modules

## Thermistor Input Module 0–400 K (continued)

### Auto-range Curves

The following table shows temperatures in °C and °F that correlate with resistance values in Ohms for the generic curve types for four popular thermistors using the [Steinhart-Hart equation](#). Choose the curve type for your application in PAC Control or PAC Manager when you configure a SNAP-AIR400K-8 module.

Choose a 2-wire thermistor value with a resistance over the target temperature range that is much larger than the lead resistance for your application

Lower value curves (2252 or 3K) work best at cooler temperatures (< 25 °C or 77 °F) because long lead wire resistance can add significant errors to the measurement.

SNAP-AIR400K-8 Auto-range Curves Table

| Temp °C | Temp °F | 2252 curve        | 3K curve  | 10K type 3 curve | 10K type 2 curve |
|---------|---------|-------------------|-----------|------------------|------------------|
|         |         | Resistance (Ohms) |           |                  |                  |
| -40     | -40     | 75,769.0          | 100,935.0 | 239,686.0        | 336,450.0        |
| -35     | -31     | 54,647.0          | 72,798.0  | 179,200.0        | 242,660.0        |
| -30     | -22     | 39,851.0          | 53,088.0  | 135,185.0        | 176,960.0        |
| -25     | -13     | 29,368.0          | 39,123.0  | 102,861.0        | 130,410.0        |
| -20     | -4      | 21,861.0          | 29,122.0  | 78,913.0         | 97,072.0         |
| -15     | 5       | 16,429.0          | 21,885.0  | 61,020.0         | 72,951.0         |
| -10     | 14      | 12,459.0          | 16,598.0  | 47,543.0         | 55,326.0         |
| -5      | 23      | 9,532.0           | 12,698.0  | 37,313.0         | 42,326.0         |
| 0       | 32      | 7,353.0           | 9,795.0   | 29,490.0         | 32,650.0         |
| 5       | 41      | 5,718.0           | 7,617.0   | 23,457.0         | 25,391.0         |
| 10      | 50      | 4,481.0           | 5,970.0   | 18,780.0         | 19,899.0         |
| 15      | 59      | 3,538.0           | 4,713.0   | 15,130.0         | 15,711.0         |
| 20      | 68      | 2,813.0           | 3,748.0   | 12,263.0         | 12,492.0         |
| 25      | 77      | 2,252.0           | 3,000.0   | 10,000.0         | 10,000.0         |
| 30      | 86      | 1,814.0           | 2,417.0   | 8,194.0          | 8,057.0          |
| 35      | 95      | 1,471.0           | 1,959.0   | 6,752.0          | 6,531.0          |
| 40      | 104     | 1,200.0           | 1,598.0   | 5,592.0          | 5,326.0          |
| 45      | 113     | 983.8             | 1,311.0   | 4,655.0          | 4,368.0          |
| 50      | 122     | 811.2             | 1,081.0   | 3,893.0          | 3,602.0          |
| 55      | 131     | 672.5             | 895.8     | 3,271.0          | 2,986.0          |
| 60      | 140     | 560.3             | 746.3     | 2,760.0          | 2,488.0          |
| 65      | 149     | 469.0             | 624.8     | 2,339.0          | 2,083.0          |
| 70      | 158     | 394.5             | 525.5     | 1,990.0          | 1,752.0          |
| 75      | 167     | 333.1             | 443.8     | 1,700.0          | 1,479.0          |

# SNAP Analog Input Modules


SNAP-AIR400K-8 Auto-range Curves Table (continued)

| Temp °C | Temp °F | 2252 curve        | 3K curve | 10K type 3 curve | 10K type 2 curve |
|---------|---------|-------------------|----------|------------------|------------------|
|         |         | Resistance (Ohms) |          |                  |                  |
| 80      | 176     | 282.7             | 376.6    | 1,458.0          | 1,255.0          |
| 85      | 185     | 240.9             | 320.9    | 1,255.0          | 1,070.0          |
| 90      | 194     | 206.2             | 274.6    | 1,084.0          | 915.4            |
| 95      | 203     | 177.1             | 236.0    | 939.3            | 786.6            |
| 100     | 212     | 152.8             | 203.6    | 816.8            | 678.6            |
| 105     | 221     | 132.3             | 176.3    | 712.6            | 587.6            |
| 110     | 230     | 115.0             | 153.2    | 623.6            | 510.6            |
| 115     | 239     | 100.3             | 133.6    | 547.3            | 445.2            |
| 120     | 248     | 87.7              | 116.9    | 481.8            | 389.6            |
| 125     | 257     | 77.0              | 102.6    | 425.3            | 341.9            |
| 130     | 266     | 67.8              | 90.3     | 376.4            | 301.0            |
| 135     | 275     | 59.9              | 79.7     | 334.0            | 265.8            |
| 140     | 284     | 53.0              | 70.6     | 297.2            | 235.4            |
| 145     | 293     | 47.1              | 62.7     | 265.1            | 209.0            |
| 150     | 302     | 41.9              | 55.8     | 237.0            | 186.1            |

The information in this table is provided by Automation Components, Inc.

## RTD Input Modules

### SNAP-AIRTD, SNAP-AIRTD-1K, and SNAP-AIRTD-10

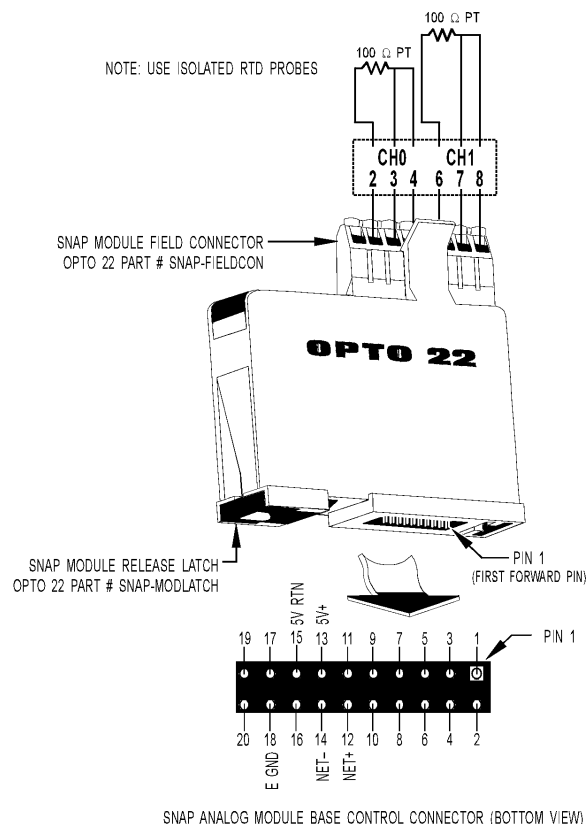

IMPORTANT: The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AIRTD and SNAP-AIRTD-1K platinum and the SNAP-AIRTD-10 copper modules are usually used for temperature inputs. They can also be used to make high-resolution resistance measurements.

On all three modules, the two inputs share the same reference terminal. Make sure you use isolated RTD probes.

The SNAP-AIRTD-10 and SNAP-AIRTD-1K require a SNAP PAC brain or R-series controller.

## SNAP Analog Input Modules



| Part Number   | Description                             |
|---------------|-----------------------------------------|
| SNAP-AIRTD-1K | Two-channel 1000 ohm platinum RTD input |
| SNAP-AIRTD    | Two-channel 100 ohm platinum RTD input  |
| SNAP-AIRTD-10 | Two-channel 10 ohm copper RTD input     |

### Wiring

RTD input modules are designed for three-wire connections, shown in the diagram below.

If you use a four-wire connection (shown at the bottom right), DO NOT connect the fourth wire, as it will cause errors in the readings.

Two-wire connections are not recommended, as they will degrade accuracy and stability.

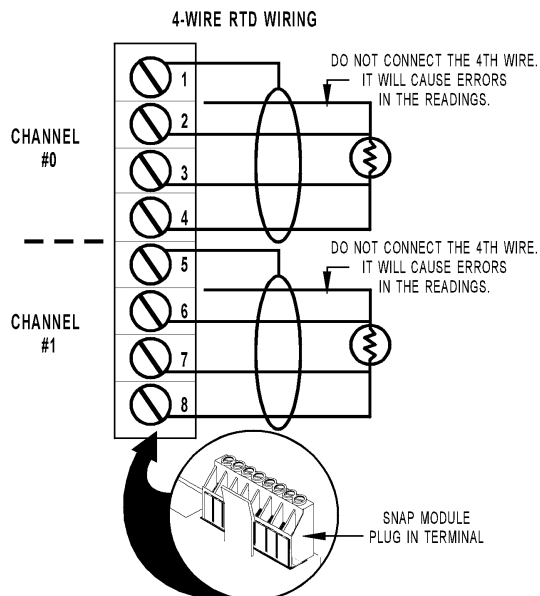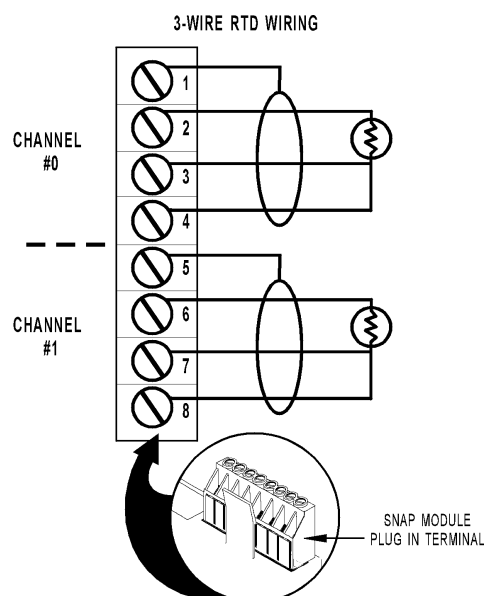

# SNAP Analog Input Modules

## RTD Input Modules (continued)

### Specifications


|                                                            | SNAP-AIRTD-1K                                                                                                                                   | SNAP-AIRTD                                                                                             | SNAP-AIRTD-10                                           |
|------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------|
| 3-wire RTD input                                           | 1000 ohm platinum @ 0 °C<br>$\alpha = 0.00385$<br>1000 ohm nickel @ 0 °C<br>$\alpha = 0.00618$<br>1000 ohm nickel @ 70 °C<br>$\alpha = 0.00637$ | 100 ohm platinum; $\alpha = 0.00385$<br>100 ohm nickel, -60 to 250 °C<br>120 ohm nickel, -80 to 260 °C | 10 ohm copper; $\alpha = 0.00428$                       |
| Input Temperature Range                                    | -200 °C to 850 °C<br>(-328° to +1,582° F)                                                                                                       | -200 °C to 850 °C<br>(-328° to +1,582° F)                                                              | -180 °C to 260 °C<br>(-292° to +500° F)                 |
| Input Range                                                | 0 to 4000 ohms                                                                                                                                  | 0 to 400 ohms                                                                                          | 0 to 25 ohms                                            |
| Over-Range Limit                                           | to 4400 ohms                                                                                                                                    | to 440 ohms                                                                                            | to 27.5 ohms                                            |
| Resolution (average)                                       | 0.042 °C (0.16 ohms)                                                                                                                            | 0.042 °C (0.016 ohms)                                                                                  | 0.026 °C (0.001 ohms)                                   |
| Input Filtering                                            | -3 dB @ 0.1 Hz                                                                                                                                  | -3 dB @ 0.1 Hz                                                                                         | -3 dB @ 100 Hz                                          |
| Data Freshness (Max)                                       | 100 ms                                                                                                                                          | 100 ms                                                                                                 | 168 ms                                                  |
| Lead Compensation                                          | Automatic when used with SNAP brains                                                                                                            | Automatic when used with SNAP brains                                                                   | Automatic when used with SNAP PAC brains                |
| DC Common Mode Rejection                                   | >-120 dB                                                                                                                                        | >-120 dB                                                                                               | >-120 dB                                                |
| AC Common Mode Rejection                                   | >-120 dB at 60 Hz                                                                                                                               | >-120 dB at 60 Hz                                                                                      | >-120 dB at 60 Hz                                       |
| Excitation (typical)                                       | 0.256 mA constant current                                                                                                                       | 1.25 mA constant current                                                                               | 5.4 mA constant current                                 |
| Maximum Lead Resistance                                    | >40 ohms single wire (all leads to be equal resistance)                                                                                         | >40 ohms single wire (all leads to be equal resistance)                                                | >15 ohms single wire (all leads to be equal resistance) |
| Maximum Fault Voltage at Input (between any 2 field wires) | ±15 V                                                                                                                                           | ±15 V                                                                                                  | ±15 V                                                   |
| Maximum Operating Common Mode Voltage                      | 250 V                                                                                                                                           | 250 V                                                                                                  | 250 V                                                   |
| Accuracy<br>From factory<br>After setting gain and offset  | 0.8 °C<br>0.6 °C                                                                                                                                | 0.8 °C<br>0.6 °C                                                                                       | 0.6 °C<br>0.5 °C                                        |
| Isolation                                                  | 1500 V                                                                                                                                          | 1500 V                                                                                                 | 1500 V                                                  |
| Power Requirements                                         | 5 VDC (±0.15) @ 190 mA                                                                                                                          | 5 VDC (±0.15) @ 190 mA                                                                                 | 5 VDC (±0.15) @ 190 mA                                  |
| Operating Temperature                                      | 0 °C to 70 °C                                                                                                                                   | 0 °C to 70 °C                                                                                          | 0 °C to 70 °C                                           |
| Storage Temperature                                        | -40 °C to 85 °C                                                                                                                                 | -40 °C to 85 °C                                                                                        | -40 °C to 85 °C                                         |
| Wire size                                                  | 22 to 14 AWG                                                                                                                                    | 22 to 14 AWG                                                                                           | 22 to 14 AWG                                            |
| Torque, hold-down screws                                   | 4 in-lb (0.45 N-m)                                                                                                                              | 4 in-lb (0.45 N-m)                                                                                     | 4 in-lb (0.45 N-m)                                      |
| Torque, connector screws                                   | 5.26 in-lb (0.6 N-m)                                                                                                                            | 5.26 in-lb (0.6 N-m)                                                                                   | 5.26 in-lb (0.6 N-m)                                    |
| Agency Approvals                                           | CE, RoHS, DFARS                                                                                                                                 | UL, FM, CE, RoHS, DFARS                                                                                | CE, RoHS, DFARS                                         |
| Warranty                                                   | Lifetime                                                                                                                                        | Lifetime                                                                                               | Lifetime                                                |

# SNAP Analog Input Modules

## ICTD Temperature Input Module, Two or Four Channels

### SNAP-AICTD (Two channels)

Four-channel module wiring is shown on the next page.

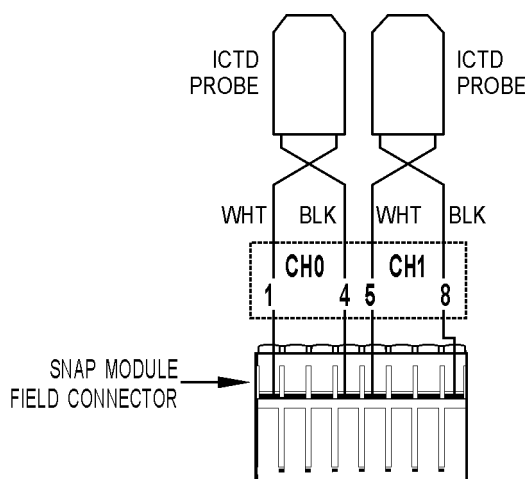

**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.



| Part Number  | Description                                 |
|--------------|---------------------------------------------|
| SNAP-AICTD   | Two-channel analog temperature input, ICTD  |
| SNAP-AICTD-4 | Four-channel analog temperature input, ICTD |

### Description

SNAP-AICTD and SNAP-AICTD-4 modules provide temperature input data from any industry-standard Integrated Circuit Temperature Device (ICTD). The SNAP-AICTD has two channels, and the SNAP-AICTD-4 has four channels. See the table on [page 3](#) for I/O processor compatibility.

The simple two-wire connections are made to the pluggable terminal strip on top of the module. Up to 2,000 feet of ordinary hook-up wire is used to connect the sensor to the input terminal strip.

Both modules are compatible with all industry-standard ICTD probes, including the AD-590 family from Analog Devices and Opto 22's part number ICTD.

### Specifications


|                                       |                                                        |
|---------------------------------------|--------------------------------------------------------|
| Input Range with ICTD Probe           | -40 °C to +100 °C                                      |
| Module Input Range                    |                                                        |
| Zero Scale                            | -273 °C                                                |
| Full Scale                            | +150 °C                                                |
| Resolution                            | 0.017 °C                                               |
| Accuracy with ICTD Probe              | ±0.8 °C                                                |
| Sensitivity                           | 1.0 microamps/ °C                                      |
| Data Freshness (Max)                  | 167 ms (2-channel module)<br>355 ms (4-channel module) |
| DC Common Mode Rejection              | >-120 dB                                               |
| AC Common Mode Rejection              | >-120 dB @ 60 Hz                                       |
| Maximum Operating Common Mode Voltage | 250 V                                                  |
| Isolation                             | 1500 V                                                 |
| Power Requirements                    | 5 VDC (± .015 ) @ 150 mA                               |
| Operating Temperature                 | 0 °C to 70 °C                                          |
| Storage Temperature                   | -40 °C to 85 °C                                        |
| Wire size                             | 22 to 14 AWG                                           |
| Torque, hold-down screws              | 4 in-lb (0.45 N-m)                                     |
| Torque, connector screws              | 5.26 in-lb (0.6 N-m)                                   |
| Agency Approvals                      | UL, FM, CE, RoHS, DFARS                                |
| Warranty                              | Lifetime                                               |

# SNAP Analog Input Modules

## ICTD Temperature Input Module (continued)

### SNAP-AICTD-4 (Four channels)

Two-channel module wiring is shown on the previous page.

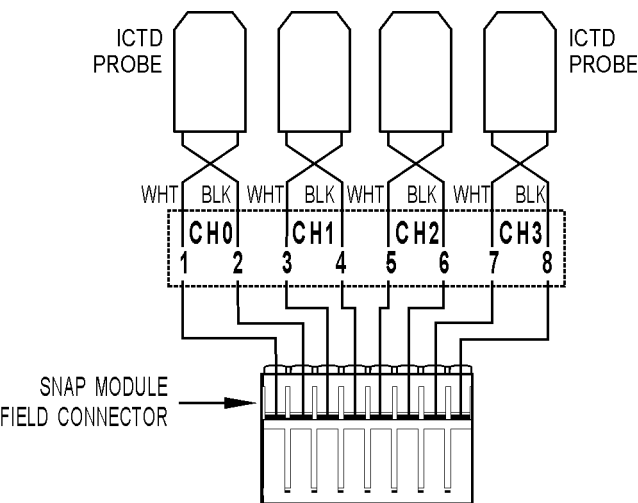


IMPORTANT: The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

# SNAP Analog Input Modules

## ICTD Temperature Input Module, Eight Channels

### SNAP-AICTD-8

ICTD Source

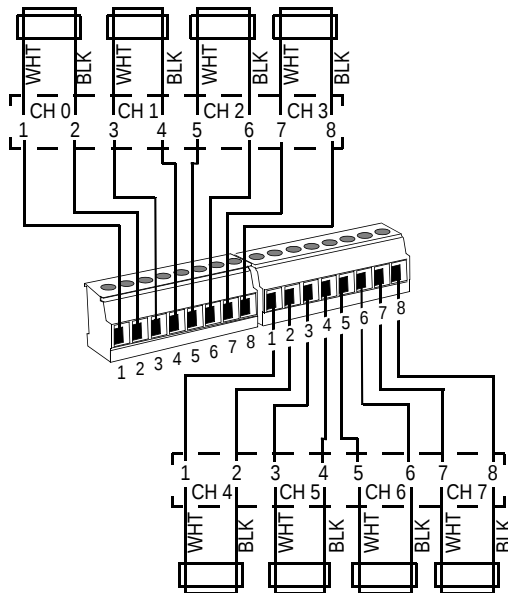

NOTE: Terminals 2, 4, 6, and 8 on both connectors are connected internally.



| Part Number  | Description                                  |
|--------------|----------------------------------------------|
| SNAP-AICTD-8 | Eight-channel analog temperature input, ICTD |

### Description

The SNAP-AICTD-8 module provides temperature input data from any industry-standard Integrated Circuit Temperature Device (ICTD). It has eight channels of input. The SNAP-AICTD-8 can be used only with SNAP PAC brains and rack-mounted controllers (standard wired and Wired+Wireless models).

The simple two-wire connections are made to the terminal strip on top of the module. Up to 2,000 feet of ordinary hook-up wire is used to connect the sensor to the input terminal strip.

The module is compatible with all industry-standard ICTD probes, including the AD-590 family from Analog Devices and Opto 22's part number ICTD.

### Specifications

|                                       |                          |
|---------------------------------------|--------------------------|
| Input Range with ICTD Probe           | -40 °C to +100 °C        |
| Module Input Range                    |                          |
| Zero Scale                            | -273 °C                  |
| Full Scale                            | +150 °C                  |
| Data Freshness (Max)                  | 0.28 seconds             |
| Resolution                            | 0.017 °C                 |
| Accuracy with ICTD Probe              | ±0.8 °C                  |
| Sensitivity                           | 1.0 mA/ °C               |
| DC Common Mode Rejection              | >-120 dB                 |
| AC Common Mode Rejection              | >-120 dB @ 60 Hz         |
| Maximum Operating Common Mode Voltage | 250 V                    |
| Isolation                             | 1500 V                   |
| Power Requirements                    | 5 VDC (± .015 ) @ 170 mA |
| Operating Temperature                 | 0 °C to 70 °C            |
| Storage Temperature                   | -40 °C to 85 °C          |
| Torque, hold-down screws              | 4 in-lb (0.45 N-m)       |
| Torque, connector screws              | 1.7 in-lb (0.19 N-m)     |
| Agency Approvals                      | CE, RoHS, DFARS          |
| Warranty                              | Lifetime                 |


# SNAP Analog Input Modules

## Thermocouple/Millivolt Input Module

### SNAP-AITM

#### Thermocouple Polarity and Range

| Type | -   | +      | Range               |
|------|-----|--------|---------------------|
| E    | Red | Purple | -270°C to +1,000 °C |
| J    | Red | White  | -210°C to +1,200 °C |
| K    | Red | Yellow | -270°C to +1,372 °C |

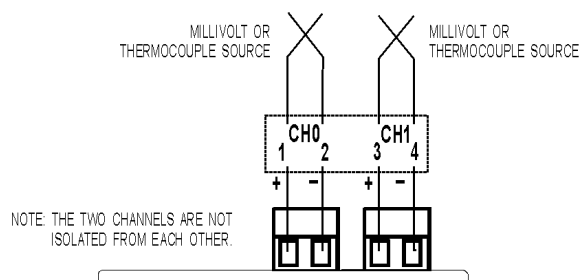

IMPORTANT: The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AITM module provides two channels of analog to digital conversion. Each channel on the module can be configured for -150 mV DC to +150 mV DC or -75 mV DC to +75 mV DC, or for type E, J, or K thermocouple operation.

Since both inputs share the same reference terminal, use isolated probes for thermocouple inputs. If you need isolated channels on the same module, see Opto 22 form #1182.



| Part Number | Description                                                                                           |
|-------------|-------------------------------------------------------------------------------------------------------|
| SNAP-AITM   | Two-channel analog type E, J, or K thermocouple or -150 mV to +150 mV input or -75 mV to +75 mV input |

### Specifications


|                                                                                   |                                                                                         |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| Input Range                                                                       | From -150 mV to +150 mV<br>From -75 mV to +75 mV                                        |
| Over-Range Limits                                                                 | From -165 to +165 mV<br>(+/-150 mV range)<br>From -82.5 to +82.5 mV<br>(+/-75 mV range) |
| Resolution                                                                        | 6 microvolts from -150 to +150 mV<br>3 microvolts from -75 to +75 mV                    |
| Cold Junction Temperature Compensation                                            | Automatic when used with SNAP I/O processors                                            |
| Input Filtering                                                                   | -3 dB @ 7 Hz                                                                            |
| Input Response Time<br>(% of span/delta V/delta time)                             | 63.2%/95 mV/23 ms                                                                       |
| Data Freshness (Max)                                                              | 167 ms (+/-150 mV)<br>334 ms (+/-75 mV)                                                 |
| DC Common Mode Rejection                                                          | >-120 dB                                                                                |
| AC Common Mode Rejection                                                          | >-120 dB @ 60 Hz                                                                        |
| Maximum Survivable Input                                                          | ±15 volts                                                                               |
| Maximum Operating Common Mode Voltage                                             | 250 V                                                                                   |
| Accuracy at Full Scale                                                            | 0.06% (90 microvolts) @ 150 mV<br>0.1% (75 microvolts) @ 75 mV                          |
| Drift: Gain Temperature Coefficient                                               | 5 microvolts / °C                                                                       |
| Drift: Offset Temperature Coefficient                                             | 2 microvolts / °C                                                                       |
| Thermocouple Accuracy [°C]<br>From factory<br>After user gain and offset commands | ± 2.0 (E, J, and K)<br>± 0.8                                                            |
| Isolation                                                                         | 1500 V                                                                                  |
| Power Requirements                                                                | 5 VDC (±0.15) @ 170 mA                                                                  |
| Input Resistance                                                                  | 100 Megohms (each channel)                                                              |
| Ambient Temperature:<br>Operating<br>Storage                                      | 0 °C to 70 °C<br>-40 °C to 85 °C                                                        |
| Torque, hold-down screws                                                          | 4 in-lb (0.45 N-m)                                                                      |
| Torque, connector screws                                                          | 3 in-lb (0.34 N-m)                                                                      |
| Agency Approvals                                                                  | FM, CE, RoHS, DFARS                                                                     |
| Warranty                                                                          | Lifetime                                                                                |

## Thermocouple/Millivolt Input Module

### SNAP-AITM-2

#### Thermocouple Polarity and Range

| Type    | -   | +      | Range                |
|---------|-----|--------|----------------------|
| B       | RED | GRAY   | +42° C to +1,820 °C  |
| C, D, G | RED | WHITE  | 0° C to +2,320 °C    |
| N       | RED | ORANGE | -270° C to +1,300 °C |
| R, S    | RED | BLACK  | -50° C to +1,768 °C  |
| T       | RED | BLUE   | -270° C to +400 °C   |

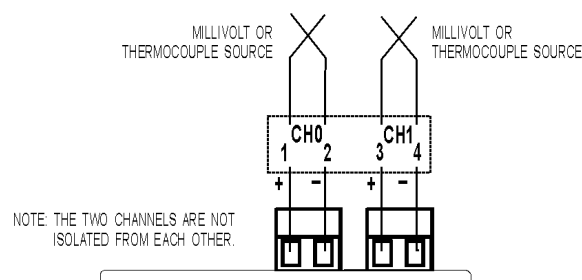

**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AITM-2 module provides an input range of  $\pm 50$  mV,  $\pm 25$  mV, or Type B, C, D, G, N, T, R, or S thermocouple.

Since both inputs share the same reference terminal, use isolated probes for thermocouple inputs. If you need isolated channels on the same module, see Opto 22 form #1182.



## SNAP Analog Input Modules

| Part Number | Description                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------|
| SNAP-AITM-2 | Two-channel analog type B, C, D, G, N, T, R, or S thermocouple or -50 mV to +50 mVDC input or -25 mV to +25 mVDC input |

### Specifications

|                                                       |                                                                                      |         |         |
|-------------------------------------------------------|--------------------------------------------------------------------------------------|---------|---------|
| Input Range                                           | From -50 mV to +50 mVDC<br>From -25 mV to +25 mVDC                                   |         |         |
| Over-range Limits                                     | From -55 to +55 mV<br>(+/-50 mV range)<br>From -27.5 to +27.5 mV<br>(+/-25 mV range) |         |         |
| Resolution                                            | 2 microvolts from -50 mV to +50 mV<br>1 microvolts from -25 mV to +25 mV             |         |         |
| Cold Junction Temperature Compensation                | Automatic when used with SNAP brains                                                 |         |         |
| Input Filtering                                       | -3 dB @ 2.4 Hz                                                                       |         |         |
| Input Response Time<br>(% of span/delta V/delta time) | 63.2%/31.5 mV/66 ms                                                                  |         |         |
| Data Freshness (Max)                                  | 167 ms (+/- 50 mV)<br>334 ms (+/- 25 mV)                                             |         |         |
| DC Common Mode Rejection                              | >-120 dB                                                                             |         |         |
| AC Common Mode Rejection                              | >-120 dB @ 60 Hz                                                                     |         |         |
| Maximum Survivable Input                              | $\pm 15$ volts                                                                       |         |         |
| Maximum Operating Common Mode Voltage                 | 250 V                                                                                |         |         |
| Accuracy at Full Scale                                | 0.1% (50 microvolts) @ 50 mV<br>0.2% (50 microvolts) @ 25 mV                         |         |         |
| Drift: Gain Temperature Coefficient                   | 5 microvolts / °C                                                                    |         |         |
| Drift: Offset Temperature Coefficient                 | 2 microvolts / °C                                                                    |         |         |
| Thermocouple Accuracy [°C]                            | B, R, S                                                                              | C, D, G | T, N    |
| From factory                                          | $\pm 5$                                                                              | $\pm 4$ | $\pm 3$ |
| After user gain and offset commands                   | $\pm 3$                                                                              | $\pm 2$ | $\pm 2$ |
| Isolation                                             | 1500 V                                                                               |         |         |
| Power Requirements                                    | 5 VDC ( $\pm 0.15$ ) @ 170 mA                                                        |         |         |
| Input Resistance                                      | 100 Megohms (each channel)                                                           |         |         |
| Ambient Temperature:<br>Operating<br>Storage          | 0 °C to 70 °C<br>-40 °C to 85 °C                                                     |         |         |
| Agency Approvals                                      | FM, CE, RoHS, DFARS                                                                  |         |         |
| Torque, hold-down screws                              | 4 in-lb (0.45 N-m)                                                                   |         |         |
| Torque, connector screws                              | 3 in-lb (0.34 N-m)                                                                   |         |         |
| Warranty                                              | Lifetime                                                                             |         |         |


# SNAP Analog Input Modules

## Thermocouple/Millivolt Input Module

### SNAP-AITM-8 and SNAP-AITM-8-FM

#### Thermocouple Polarity and Range

| Type    | -   | +      | Range                |
|---------|-----|--------|----------------------|
| B       | RED | GRAY   | +42° C to +1,820 °C  |
| C, D, G | RED | WHITE  | 0° C to +2,320 °C    |
| E       | RED | PURPLE | -270°C to +1,000 °C  |
| J       | RED | WHITE  | -210°C to +1,200 °C  |
| K       | RED | YELLOW | -270°C to +1,372 °C  |
| N       | RED | ORANGE | -270° C to +1,300 °C |
| R, S    | RED | BLACK  | -50° C to +1,768 °C  |
| T       | RED | BLUE   | -270° C to +400 °C   |

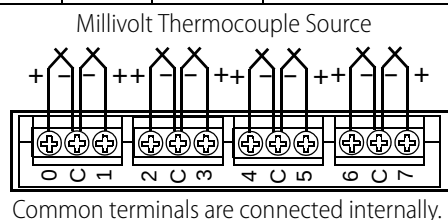

NOTE: For best accuracy, wire all points before calibrating, and short all unused channels.

The SNAP-AITM-8-FM is Factory Mutual approved.



### Description

The SNAP-AITM-8 and SNAP-AITM-8-FM modules provide eight channels of analog to digital conversion. Each channel on the module can be configured for -75 mV DC to +75 mV DC, -50 mV DC to +50 mV DC, -25 mV DC to +25 mV DC, or for type B, C, D, E, G, J, K, N, R, S or T thermocouple operation.

Since all inputs share the same reference terminal, use isolated probes for thermocouple inputs. See the dimensional diagram on [page 37](#).


| Part Number                   | Description                                                                                                              |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| SNAP-AITM-8<br>SNAP-AITM-8-FM | 8-channel B, C, D, E, G, J, K, N, R, S, or T thermocouple or -75 mV to +75 mV, 50 mV to +50 mV, or 25 mV to +25 mV input |

### Specifications

|                                        |                                                                                                                           |         |         |      |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------|---------|---------|------|
| Input Range                            | From -75 mV to +75 mV<br>From -50 mV to +50 mV<br>From -25 mV to +25 mV                                                   |         |         |      |
| Over-Range Limits                      | From -82.5 to +82.5 mV (+/-75 mV range)<br>From -55 to +55 mV (+/-50 mV range)<br>From -27.5 to +27.5 mV (+/-25 mV range) |         |         |      |
| Resolution                             | 3 microvolts from -75 mV to +75 mV<br>2 microvolts from -50 mV to +50 mV<br>1 microvolts from -25 mV to +25 mV            |         |         |      |
| Cold Junction Temperature Compensation | Automatic when used with SNAP I/O processors                                                                              |         |         |      |
| Input Filtering                        | -3 dB @ 5 Hz                                                                                                              |         |         |      |
| Data Freshness (Max)                   | 2.25 s                                                                                                                    |         |         |      |
| DC Common Mode Rejection               | >-120 dB                                                                                                                  |         |         |      |
| AC Common Mode Rejection               | >-120 dB @ 60 Hz                                                                                                          |         |         |      |
| Maximum Survivable Input               | ±15 volts                                                                                                                 |         |         |      |
| Max Operating Common Mode Voltage      | 250 V                                                                                                                     |         |         |      |
| Accuracy at Full Scale                 | 0.1% (75 microvolts) @ 75 mV<br>0.1% (50 microvolts) @ 50 mV<br>0.2% (50 microvolts) @ 25 mV                              |         |         |      |
| Drift: Gain Temperature Coefficient    | 5 microvolts / °C                                                                                                         |         |         |      |
| Drift: Offset Temperature Coefficient  | 2 microvolts / °C                                                                                                         |         |         |      |
| Thermocouple Accuracy [°C]             | E, J, K                                                                                                                   | B, R, S | C, D, G | T, N |
| From factory                           | ±2.0                                                                                                                      | ±5      | ±4      | ±3   |
| After user gain and offset commands    | ±0.5                                                                                                                      | ±3      | ±2      | ±2   |
| Isolation                              | 1500 V                                                                                                                    |         |         |      |
| Power Requirements                     | 5 VDC (±0.15) @ 200 mA                                                                                                    |         |         |      |
| Input Resistance                       | 100 Megohms (each channel)                                                                                                |         |         |      |
| Ambient Temperature: Operating Storage | 0 °C to 70 °C<br>-40 °C to 85 °C                                                                                          |         |         |      |
| Torque, hold-down screws               | 4 in-lb (0.45 N-m)                                                                                                        |         |         |      |
| Torque, connector screws               | 3 in-lb (0.34 N-m)                                                                                                        |         |         |      |
| Agency Approvals                       | SNAP-AITM-8: UL, CE, RoHS, DFARS<br>SNAP-AITM-8-FM: FM, CE, RoHS, DFARS                                                   |         |         |      |
| Warranty                               | Lifetime                                                                                                                  |         |         |      |

## 0 to 250 Volt RMS AC/DC Input Module

## SNAP-AIVRMS

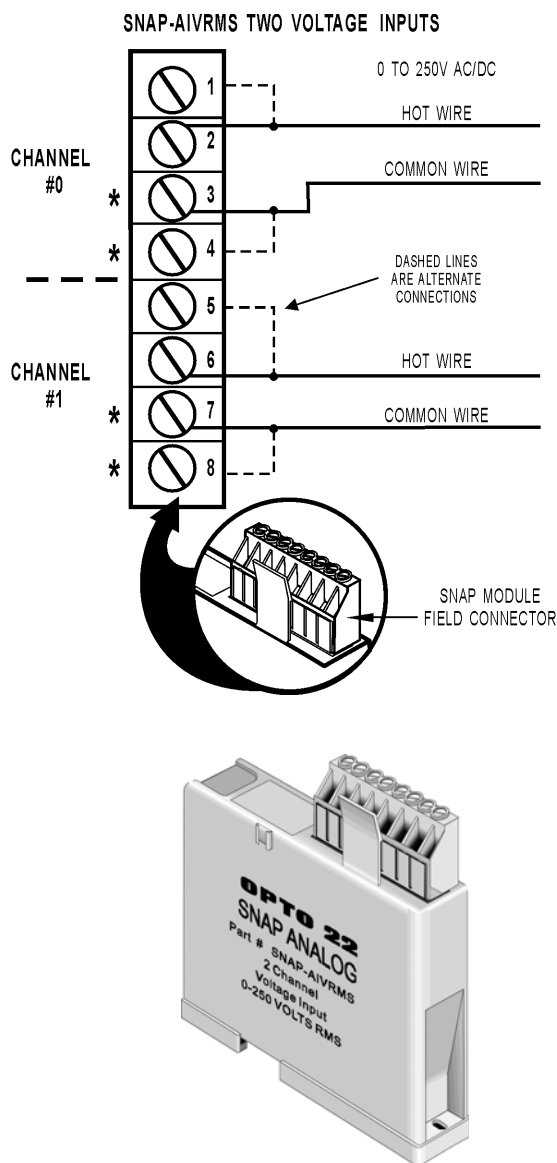

## SNAP Analog Input Modules

| Part Number | Description                            |
|-------------|----------------------------------------|
| SNAP-AIVRMS | Two-channel 0 to 250 V RMS AC/DC input |

### Description

The SNAP-AIVRMS module provides an input range of 0 to 250 volts AC or DC. The SNAP-AIVRMS module may be used to monitor 120/240-volt AC/DC and 12/24/48-volt AC/DC system voltage.

Terminals 3, 4, 7, and 8 share a common connection inside the module. Make sure you observe polarity when connecting the second channel. To avoid a potentially hazardous short, double-check wiring before turning on the voltage to be monitored.

If you need a module with channel-to-channel isolation, see form #1182, the *SNAP Isolated Analog Input Modules Data Sheet*.

## Specifications


|                                          |                                                                            |
|------------------------------------------|----------------------------------------------------------------------------|
| Input Range                              | 0 to 250 V RMS AC/DC                                                       |
| Input Over-Range                         | To 275 V                                                                   |
| Input Resistance                         | 1 M ohms                                                                   |
| Accuracy                                 | ±0.2 V and ±0.2% reading                                                   |
| Resolution                               | 10 mV                                                                      |
| DC Reversal                              | ± 0.4 V (.16%)                                                             |
| Input Response Time<br>(Step Change)     | 5% (12.5 V) in 100 mS<br>63.2% (158 V) in 200 mS<br>99% (248 V) in 1200 mS |
| Data Freshness (Max)                     | 32.3 ms                                                                    |
| DC Common Mode Rejection                 | >-120 dB                                                                   |
| AC Common Mode Rejection                 | >-120 dB @ 60 Hz                                                           |
| Maximum Operating<br>Common Mode Voltage | 250 V                                                                      |
| Isolation                                | 1500 V                                                                     |
| Power Requirements                       | 5 VDC (±0.15 V) at 170 mA                                                  |
| Operating Temperature                    | 0 °C to 70 °C                                                              |
| Storage Temperature                      | -40 °C to 85 °C                                                            |
| Wire size                                | 22 to 14 AWG                                                               |
| Torque, hold-down screws                 | 4 in-lb (0.45 N-m)                                                         |
| Torque, connector screws                 | 5.26 in-lb (0.6 N-m)                                                       |
| Agency Approvals                         | UL, FM, CE, RoHS, DFARS                                                    |
| Warranty                                 | Lifetime                                                                   |

# SNAP Analog Input Modules

## Voltage Input Module, -10 VDC to +10 VDC or -5 VDC to +5 VDC, Two or Four Channels

### SNAP-AIV (Two channels)

Four-channel module wiring is shown on [page 28](#).

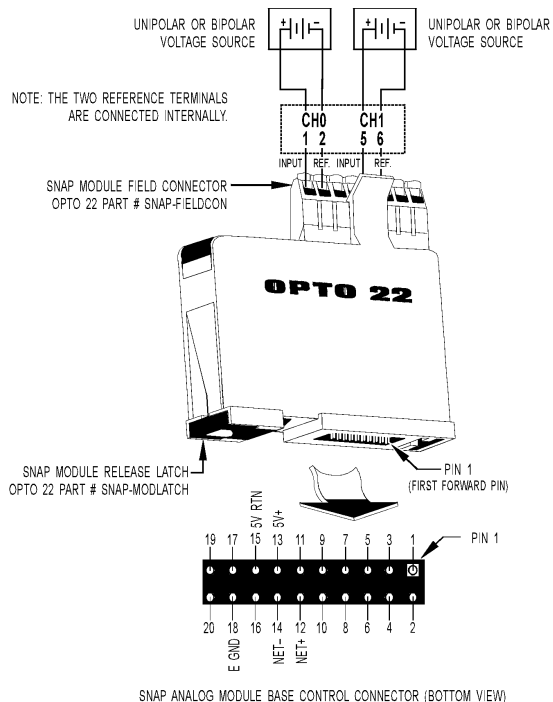

**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AIV and SNAP-AIV-4 modules can be configured for either -10 VDC to +10 VDC or -5 VDC to +5 VDC operation on each channel. The SNAP-AIV provides two channels, and the SNAP-AIV-4 four. If you need a module with more channels, see [page 29](#). See the table on [page 3](#) for I/O processor compatibility.

Note that all channels share a common reference terminal. If you need two isolated channels on the same module, see Opto22 form #1182.

| Part Number | Description                                      |
|-------------|--------------------------------------------------|
| SNAP-AIV    | Two-channel analog voltage input -10 to +10 VDC  |
| SNAP-AIV-4  | Four-channel analog voltage input -10 to +10 VDC |

### Specifications


|                                                       |                                                                                                                                  |
|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Input Range                                           | From -10 volts to +10 volts<br>From -5 volts to +5 volts                                                                         |
| Over-Range Limits                                     | From -11 to +11 volts (+/-10 V range)<br>From -5.5 to +5.5 volts (+/-5 V range)                                                  |
| Resolution                                            | 0.4 mV when configured -10 to +10 volts<br>0.2 mV when configured -5 to +5 volts                                                 |
| Input Filtering                                       | -3 dB @ 64 Hz                                                                                                                    |
| Input Response Time<br>(% of span/ delta V / delta t) | 63.2% / 6.7 V / 10 ms                                                                                                            |
| Data Freshness (Max)                                  | 11.5 ms (2-channel, +/- 10 VDC)<br>23 ms (2-channel, +/- 5 VDC)<br>23 ms (4-channel, +/- 10 VDC)<br>46 ms (4-channel, +/- 5 VDC) |
| DC Common Mode Rejection                              | >-120 dB                                                                                                                         |
| AC Common Mode Rejection                              | >-120 dB @ 60 Hz                                                                                                                 |
| Maximum Survivable Input                              | 220 VAC or 300 VDC                                                                                                               |
| Maximum Operating Common Mode Voltage                 | 250 V                                                                                                                            |
| Accuracy                                              | 0.05%, 5 mV @ 10 VDC<br>2.5 mV @ 5 VDC                                                                                           |
| Gain Temperature Coefficient                          | 30 PPM/ °C                                                                                                                       |
| Offset Temperature Coefficient                        | 15 PPM/ °C                                                                                                                       |
| Isolation                                             | 1500 V                                                                                                                           |
| Power Requirements                                    | 5 VDC (±0.15) @ 170 mA                                                                                                           |
| Input Resistance                                      | 1 M ohms (each channel; both channels share the same reference point)                                                            |
| Ambient Temperature:<br>Operating<br>Storage          | 0 °C to 70 °C<br>-40 °C to 85 °C                                                                                                 |
| Wire size                                             | 22 to 14 AWG                                                                                                                     |
| Torque, hold-down screws                              | 4 in-lb (0.45 N-m)                                                                                                               |
| Torque, connector screws                              | 5.26 in-lb (0.6 N-m)                                                                                                             |
| Agency Approvals                                      | UL, FM, CE, RoHS, DFARS                                                                                                          |
| Warranty                                              | Lifetime                                                                                                                         |

## SNAP Analog Input Modules

### Voltage Input Module, -10 VDC to +10 VDC or -5 VDC to +5 VDC, Four Channels (continued)

#### SNAP-AIV-4 (Four channels)

Two-channel module wiring is shown on the previous page.

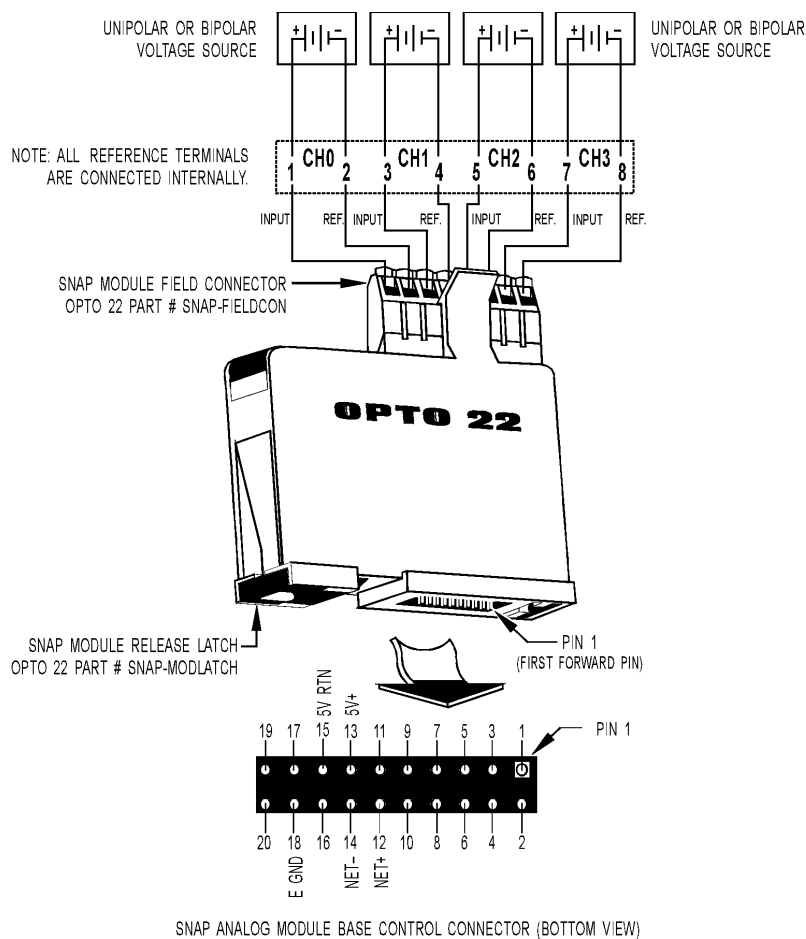


**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

# SNAP Analog Input Modules

## Voltage Input Module, -10 VDC to +10 VDC or -5 VDC to +5 VDC, Eight Channels

### SNAP-AIV-8

Voltage Source

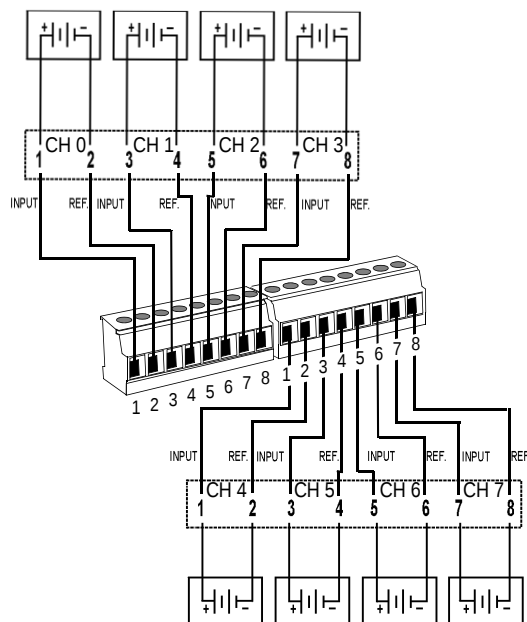

NOTE: Terminals 2, 4, 6, and 8 on both connectors are connected internally.

### Description

The SNAP-AIV-8 module can be configured for either -10 VDC to +10 VDC or -5 VDC to +5 VDC operation on each of its eight input channels. (If you need a module with more channels, see [page 30](#).) The SNAP-AIV-8 can be used only with SNAP PAC brains and rack-mounted controllers (standard wired and Wired+Wireless models).



| Part Number | Description                                       |
|-------------|---------------------------------------------------|
| SNAP-AIV-8  | Eight-channel analog voltage input -10 to +10 VDC |

Note that all channels share a common reference terminal. If you need two isolated channels on the same module, see Opto22 form #1182.

### Specifications

|                                              |                                                                                  |
|----------------------------------------------|----------------------------------------------------------------------------------|
| Input Range                                  | From -10 volts to +10 volts<br>From -5 volts to +5 volts                         |
| Over-Range Limits                            | From -11 to +11 volts (+/-10 V range)<br>From -5.5 to +5.5 volts (+/-5 V range)  |
| Resolution                                   | 0.4 mV when configured -10 to +10 volts<br>0.2 mV when configured -5 to +5 volts |
| Input Filtering                              | -3 dB @ 64 Hz                                                                    |
| Data Freshness (Max)                         | 0.28 seconds                                                                     |
| DC Common Mode Rejection                     | >-120 dB                                                                         |
| AC Common Mode Rejection                     | >-120 dB @ 60 Hz                                                                 |
| Maximum Survivable Input                     | 220 VAC or 300 VDC                                                               |
| Maximum Operating Common Mode Voltage        | 250 V                                                                            |
| Accuracy                                     | 0.05%, 5 mV @ 10 VDC<br>2.5 mV @ 5 VDC                                           |
| Gain Temperature Coefficient                 | 30 PPM/ °C                                                                       |
| Offset Temperature Coefficient               | 15 PPM/ °C                                                                       |
| Isolation                                    | 1500 V                                                                           |
| Power Requirements                           | 5 VDC (±0.15) @ 170 mA                                                           |
| Input Resistance                             | 1 M ohms (all channels share the same reference point)                           |
| Ambient Temperature:<br>Operating<br>Storage | 0 °C to 70 °C<br>40 °C to 85 °C                                                  |
| Torque, hold-down screws                     | 4 in-lb (0.45 N-m)                                                               |
| Torque, connector screws                     | 1.7 in-lb (0.19 N-m)                                                             |
| Agency Approvals                             | CE, RoHS, DFARS                                                                  |
| Warranty                                     | Lifetime                                                                         |

## SNAP Analog Input Modules

### Voltage Input Module, -10 VDC to +10 VDC or -5 VDC to +5 VDC, 32 Channels

#### Specifications

|                                        |                                                                                  |
|----------------------------------------|----------------------------------------------------------------------------------|
| Input Range                            | From -10 volts to +10 volts<br>From -5 volts to +5 volts                         |
| Over-Range Limits                      | From -11 to +11 volts (+/-10 V range)<br>From -5.5 to +5.5 volts (+/-5 V range)  |
| Resolution                             | 0.4 mV when configured -10 to +10 volts<br>0.2 mV when configured -5 to +5 volts |
| Input Filtering                        | -3 dB @ 31 Hz                                                                    |
| Data Freshness (Max)                   | 1.1 s                                                                            |
| DC Common Mode Rejection               | >-120 dB                                                                         |
| AC Common Mode Rejection               | >-120 dB @ 60 Hz                                                                 |
| Maximum Survivable Input               | 220 VAC or 300 VDC                                                               |
| Maximum Operating Common Mode Voltage  | 250 V                                                                            |
| Accuracy                               | 0.05%, 5 mV @ 10 VDC<br>2.5 mV @ 5 VDC                                           |
| Gain Temperature Coefficient           | 30 PPM/ °C                                                                       |
| Offset Temperature Coefficient         | 15 PPM/ °C                                                                       |
| Isolation                              | 1500 V                                                                           |
| Power Requirements                     | 5 VDC ( $\pm 0.15$ ) @ 150 mA                                                    |
| Input Resistance                       | 1 M ohms (each channel; all channels share the same reference point)             |
| Ambient Temperature: Operating Storage | 0 °C to 70 °C<br>-40 °C to 85 °C                                                 |
| Torque, hold-down screws               | 4 in-lb (0.45 N-m)                                                               |
| Torque, connector screws               | 5.26 in-lb (0.6 N-m)                                                             |
| Agency Approvals                       | SNAP-AIV-32: UL, CE, RoHS, DFARS<br>SNAP-AIV-32-FM: FM, CE, RoHS, DFARS          |
| Warranty                               | Lifetime                                                                         |

| Part Number                     | Description                                                            |
|---------------------------------|------------------------------------------------------------------------|
| SNAP-AIV-32<br>SNAP-AIV-32-FM   | 32-channel analog voltage input -10 to +10 VDC                         |
| SNAP-HD-CBF6                    | Wiring harness with flying leads for SNAP-AIV-32 modules               |
| SNAP-HD-BF6                     | Wiring harness for SNAP-AIV-32 modules and SNAP-AIV-HDB breakout racks |
| SNAP-AIV-HDB<br>SNAP-AIV-HDB-FM | Breakout racks for SNAP-AIV-32 and SNAP-AIV-32-FM                      |

#### Description

The SNAP-AIV-32 and SNAP-AIV-32-FM modules can be configured for either -10 VDC to +10 VDC or -5 VDC to +5 VDC operation on each of its 32 channels. See the table on [page 3](#) for I/O processor compatibility. The SNAP-AIV-32-FM is Factory Mutual approved.

Note that all channels share a common reference terminal. (For channel-to-channel isolated modules, see Opto22 form #1182.)

SNAP TEX cables and a breakout rack are available separately for wiring points to field devices (see form #1756, the *SNAP TEX Cables & Breakout Boards Data Sheet*). The SNAP-HD-BF6 wiring harness connects the module to the breakout rack, which can then be wired to field devices. The SNAP-HD-CBF6 wiring harness has flying leads to connect to field devices.

See the dimensional drawing for the module on [page 39](#).




# SNAP Analog Input Modules

## Voltage Input Module -10 VDC to +10 VDC or -5 VDC to +5 VDC (continued)


Wiring diagram: SNAP-AIV-HDB breakout rack to SNAP-AIV-32 or SNAP-AIV-32-FM module

NOTE: This diagram is also used to wire the SNAP-AIV-HDB breakout rack to a SNAP-AIMA-32 or SNAP-AIMA-32-FM module, when the module connects to self-powered (4-wire) device.

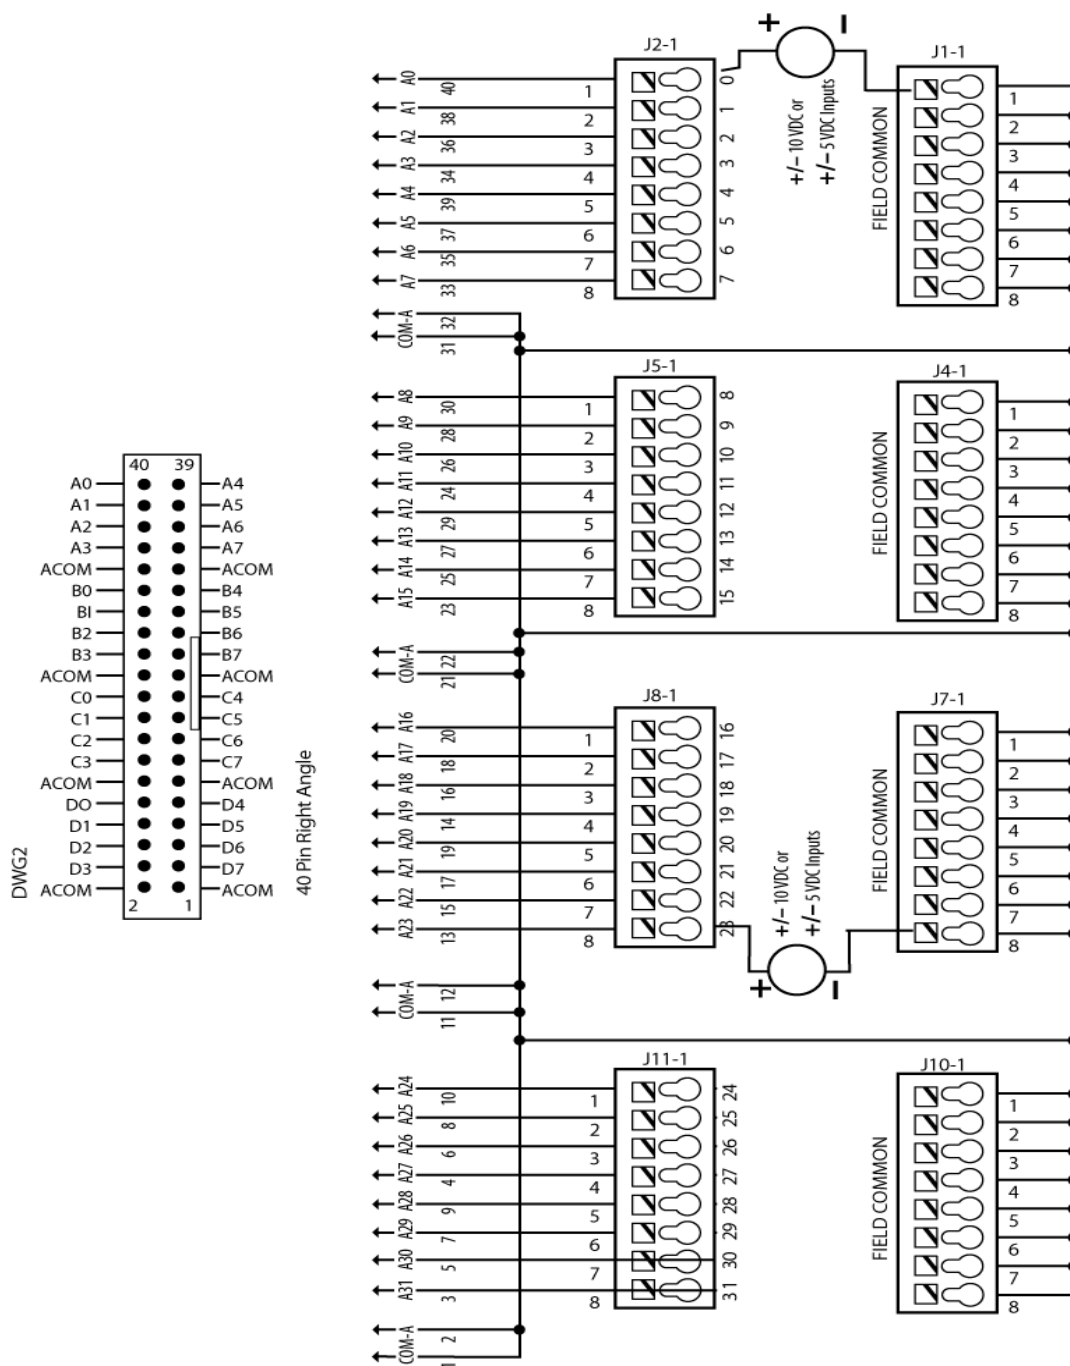

## Millivolt Input Module

### SNAP-AIMV2-4

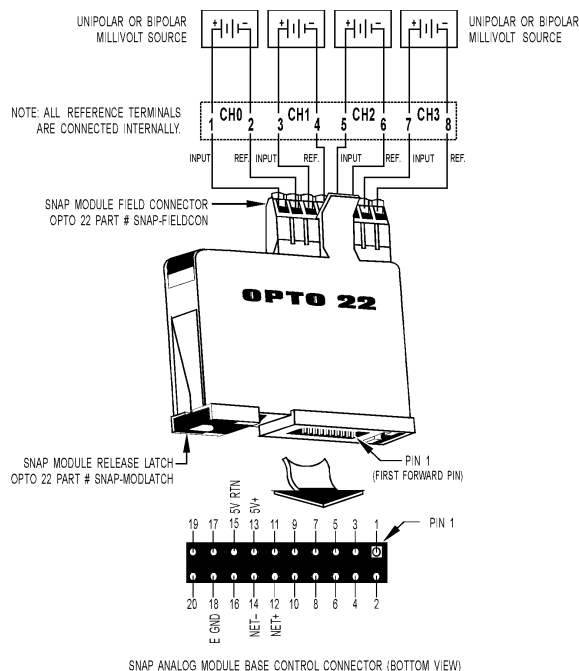

**IMPORTANT:** The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AIMV2-4 module provides four channels of analog to digital conversion. See the table on [page 3](#) for I/O processor compatibility.

Each channel on the module can be configured for -50 mV DC to +50 mV DC or -25 mV DC to +25 mV DC.

Note that all inputs share the same reference terminal.

## SNAP Analog Input Modules

| Part Number  | Description                                                |
|--------------|------------------------------------------------------------|
| SNAP-AIMV2-4 | Four-channel -50 to +50 mV input or -25 mV to +25 mV input |


### Specifications

|                                                       |                                                                                      |
|-------------------------------------------------------|--------------------------------------------------------------------------------------|
| Input Range                                           | From -50 mV to +50 mV<br>From -25 mV to +25 mV                                       |
| Over-Range Limits                                     | From -55 to +55 mV<br>(+/-50 mV range)<br>From -27.5 to +27.5 mV<br>(+/-25 mV range) |
| Resolution                                            | 2 microvolts (-50 mV to +50 mV)<br>1 microvolt (-25 mV to +25 mV)                    |
| Input Filtering                                       | -3 dB @ 2.4Hz                                                                        |
| Input Response Time<br>(% of span/delta V/delta time) | 63.2%/31.5 mV/66 ms                                                                  |
| Data Freshness (Max)                                  | 335 ms (+/- 50 mV)<br>668 ms (+/- 25 mV)                                             |
| DC Common Mode Rejection                              | >-120 dB                                                                             |
| AC Common Mode Rejection                              | >-120 dB @ 60 Hz                                                                     |
| Maximum Survivable Input                              | ±15 volts                                                                            |
| Maximum Operating Common Mode Voltage                 | 250 V                                                                                |
| Accuracy at Full Scale                                | 0.1% (50 microvolts) @ 50m V<br>0.2% (50 microvolts) @ 25 mV                         |
| Drift: Gain Temperature Coefficient                   | 3 microvolts / °C                                                                    |
| Drift: Offset Temperature Coefficient                 | 2 microvolts / °C                                                                    |
| Isolation                                             | 1500 V                                                                               |
| Power Requirements                                    | 5 VDC (±0.15 ) @ 170 mA                                                              |
| Input Resistance - Single Ended                       | 100 Megohms (each channel)                                                           |
| Operating Temperature                                 | 0 °C to 70 °C                                                                        |
| Storage Temperature                                   | -40 °C to 85 °C                                                                      |
| Wire size                                             | 22 to 14 AWG                                                                         |
| Torque, hold-down screws                              | 4 in-lb (0.45 N-m)                                                                   |
| Torque, connector screws                              | 5.26 in-lb (0.6 N-m)                                                                 |
| Agency Approvals                                      | UL, FM, CE, RoHS, DFARS                                                              |
| Warranty                                              | Lifetime                                                                             |

# SNAP Analog Input Modules

## Millivolt Input Module

### SNAP-AIMV-4

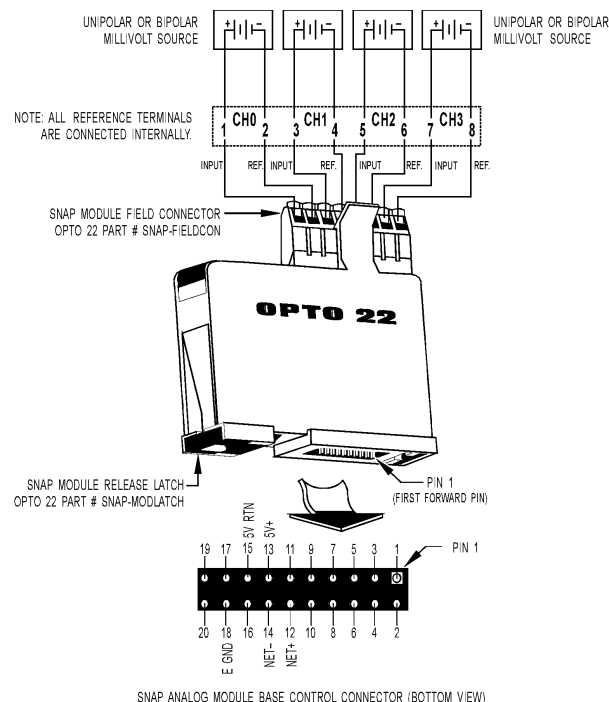

IMPORTANT: The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

### Description

The SNAP-AIMV-4 module provides four channels of analog to digital conversion. See the table on [page 3](#) for I/O processor compatibility.

Each channel on the module can be configured for -150 mV DC to +150 mV DC or -75 mV DC to +75 mV DC.

Note that all inputs share the same reference terminal.

| Part Number | Description                                         |
|-------------|-----------------------------------------------------|
| SNAP-AIMV-4 | Four-channel -150 to +150 mV or -75 to +75 mV input |


### Specifications

|                                                    |                                                                                         |
|----------------------------------------------------|-----------------------------------------------------------------------------------------|
| Input Range                                        | From -150 mV to +150 mV<br>From -75 mV to +75m V                                        |
| Over-Range Limits                                  | From -165 to +165 mV<br>(+/-150 mV range)<br>From -82.5 to +82.5 mV<br>(+/-75 mV range) |
| Resolution                                         | 6 microvolts (-150 mV to +150 mV)<br>3 microvolts (-75 mV to +75 mV)                    |
| Input Filtering                                    | -3 dB @ 7 Hz                                                                            |
| Input Response Time (% of span/delta V/delta time) | 63.2%/95 mV/23 ms                                                                       |
| Data Freshness (Max)                               | 335 ms (+/- 150 mV)<br>668 ms (+/- 75 mV)                                               |
| DC Common Mode Rejection                           | >-120 dB                                                                                |
| AC Common Mode Rejection                           | >-120 dB @ 60 Hz                                                                        |
| Maximum Survivable Input                           | ±15 volts                                                                               |
| Maximum Operating Common Mode Voltage              | 250 V                                                                                   |
| Accuracy at Full Scale                             | 0.06% (90 microvolts) @ 150 mV<br>0.1% (75 microvolts) @ 75 mV                          |
| Drift: Gain Temperature Coefficient                | 3 microvolts / °C                                                                       |
| Drift: Offset Temperature Coefficient              | 2 microvolts / °C                                                                       |
| Isolation                                          | 1500 V                                                                                  |
| Power Requirements                                 | 5 VDC (±0.15 ) @ 170 mA                                                                 |
| Input Resistance - Single Ended                    | 100 Megohms (each channel)                                                              |
| Operating Temperature                              | 0 °C to 70 °C                                                                           |
| Storage Temperature                                | -40 °C to 85 °C                                                                         |
| Wire size                                          | 22 to 14 AWG                                                                            |
| Torque, hold-down screws                           | 4 in-lb (0.45 N-m)                                                                      |
| Torque, connector screws                           | 5.26 in-lb (0.6 N-m)                                                                    |
| Agency Approvals                                   | UL, FM, CE, RoHS, DFARS                                                                 |
| Warranty                                           | Lifetime                                                                                |

## SNAP Analog Input Modules

### Alternate Wiring Diagram


SNAP-AIV-HDB breakout rack to SNAP-AIMA-32 or SNAP-AIMA-32-FM module  
when the module connects to devices that share a positive common connection

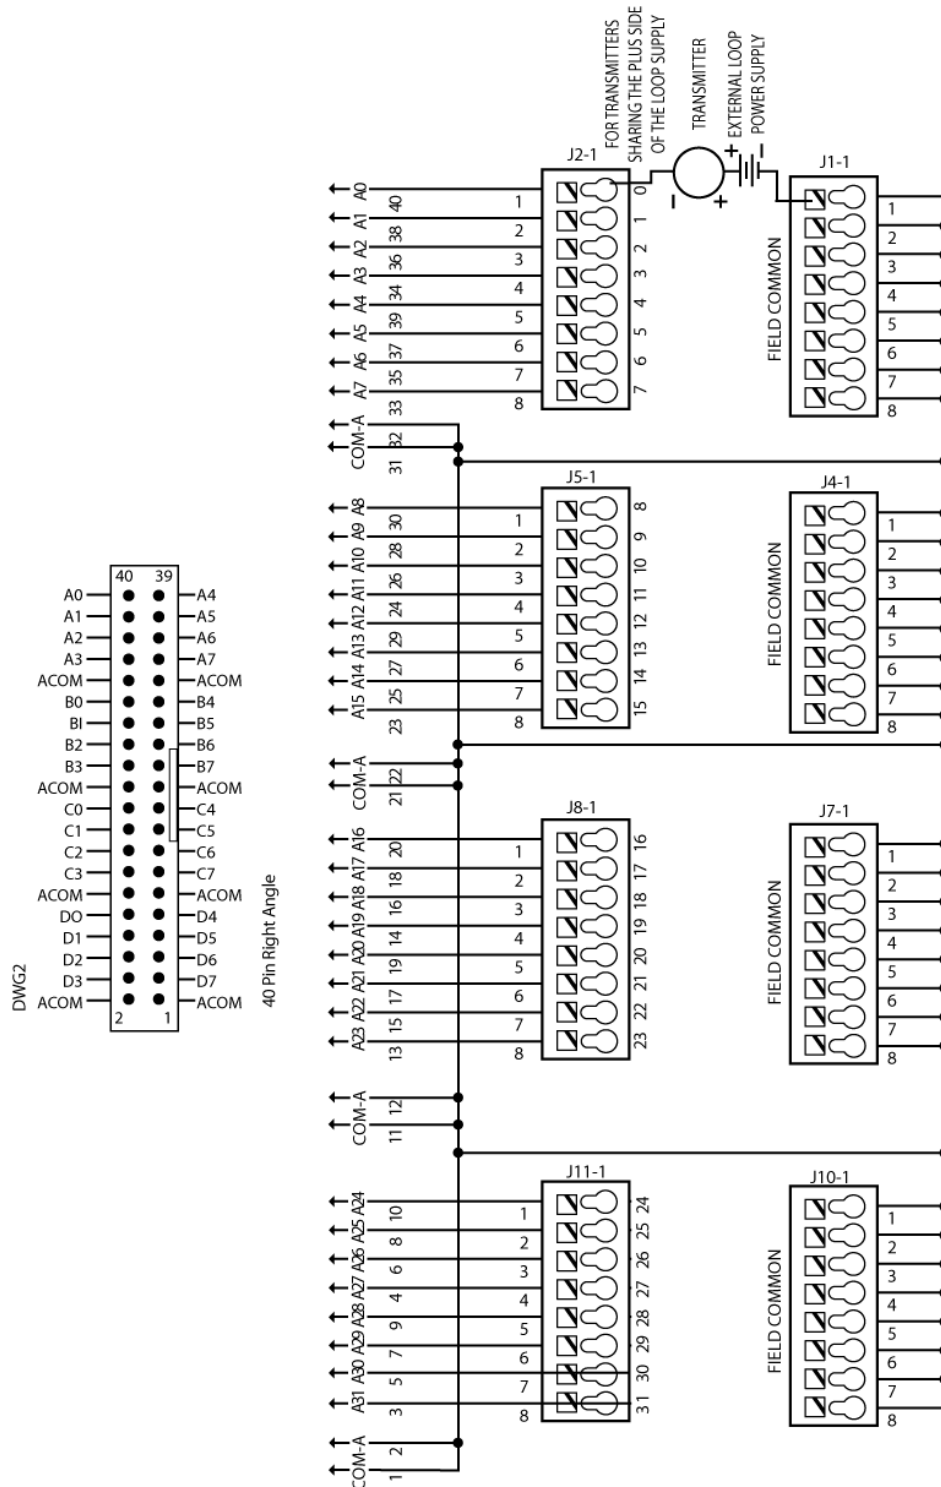

# SNAP Analog Input Modules

## Dimensional Drawing


All Two- and Four-channel Modules, except SNAP-AITM-2

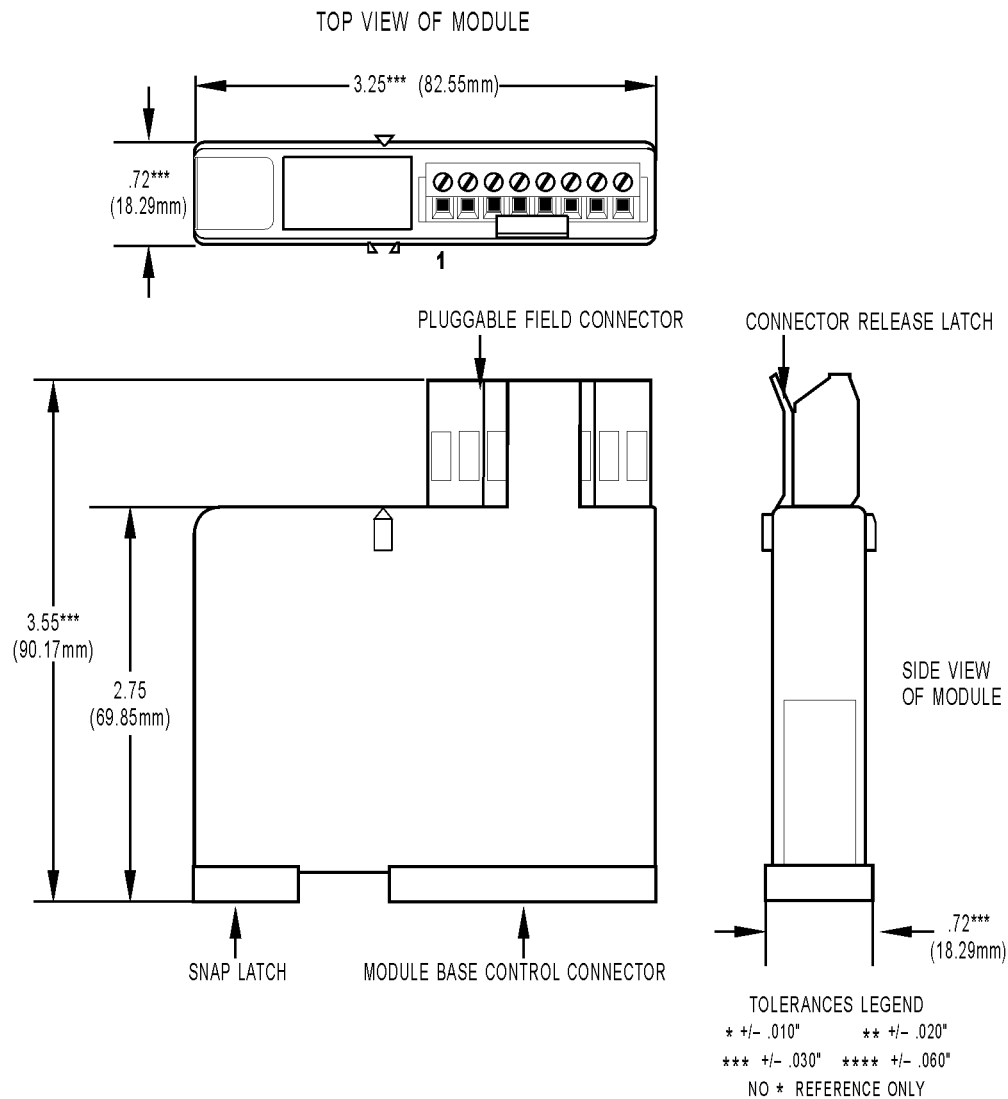

# SNAP Analog Input Modules

## Dimensional Drawing

### SNAP-AITM-2 Modules

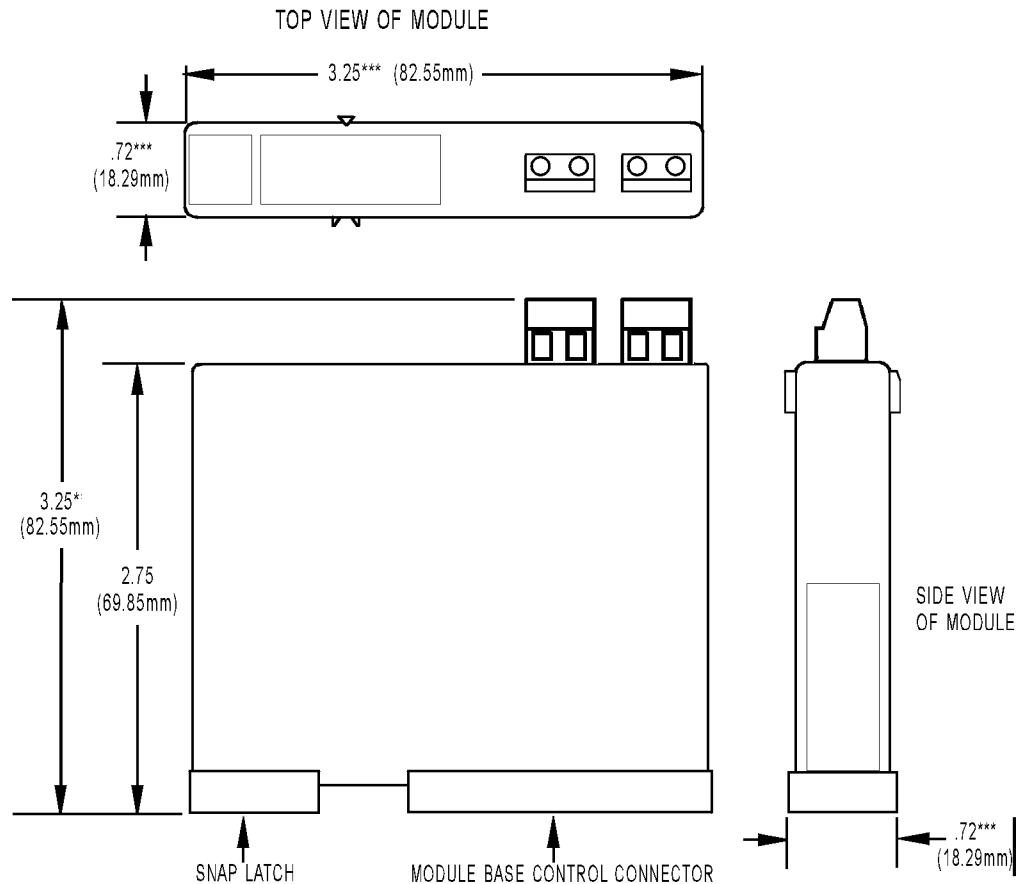

#### TOLERANCES LEGEND

\* +/- .010"      \*\* +/- .020"


\*\*\* +/- .030"      \*\*\*\* +/- .060"

NO \* REFERENCE ONLY

# SNAP Analog Input Modules

## Dimensional Drawing


### SNAP-AITM-8 and SNAP-AITM-8-FM Modules

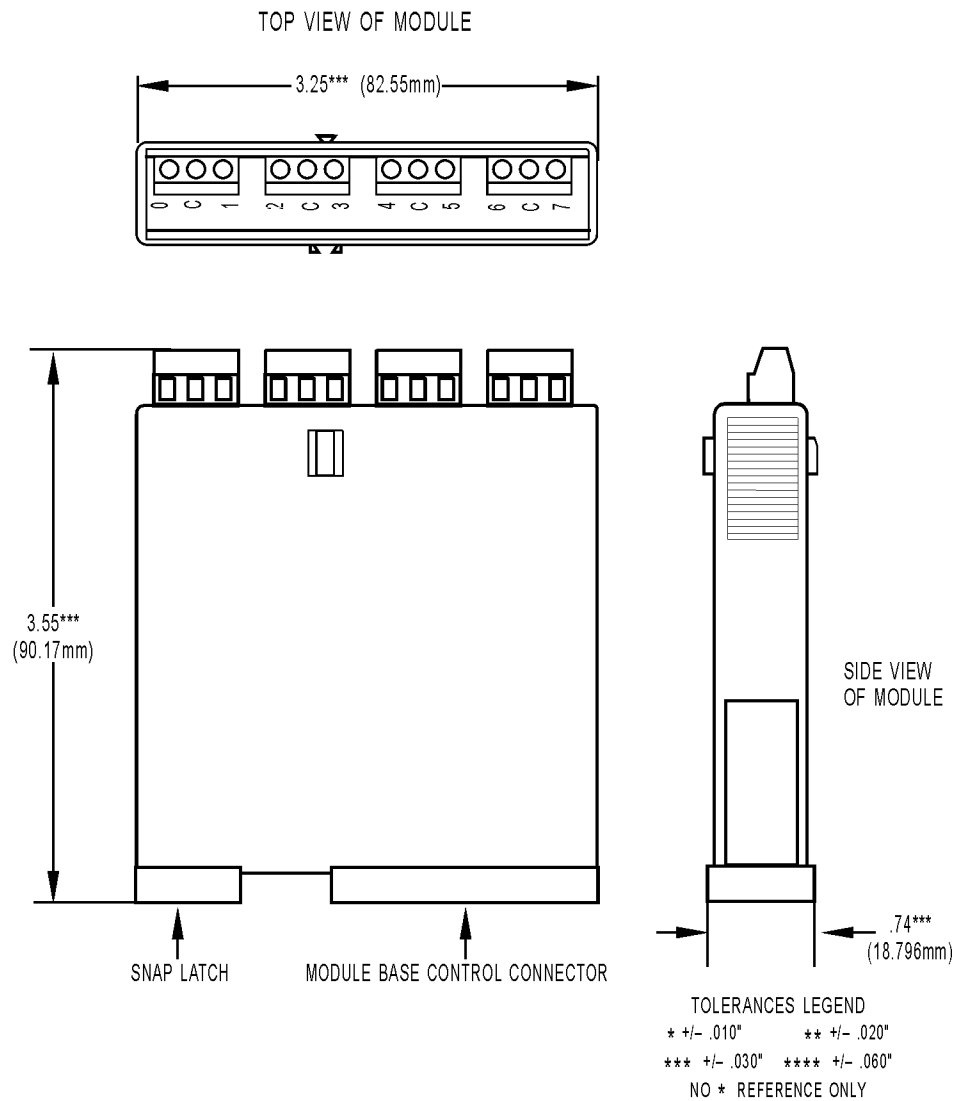

# SNAP Analog Input Modules

## Dimensional Drawing


SNAP-AICTD-8, SNAP-AIMA-8, SNAP-AIV-8, and SNAP-AIR400K-8 Modules

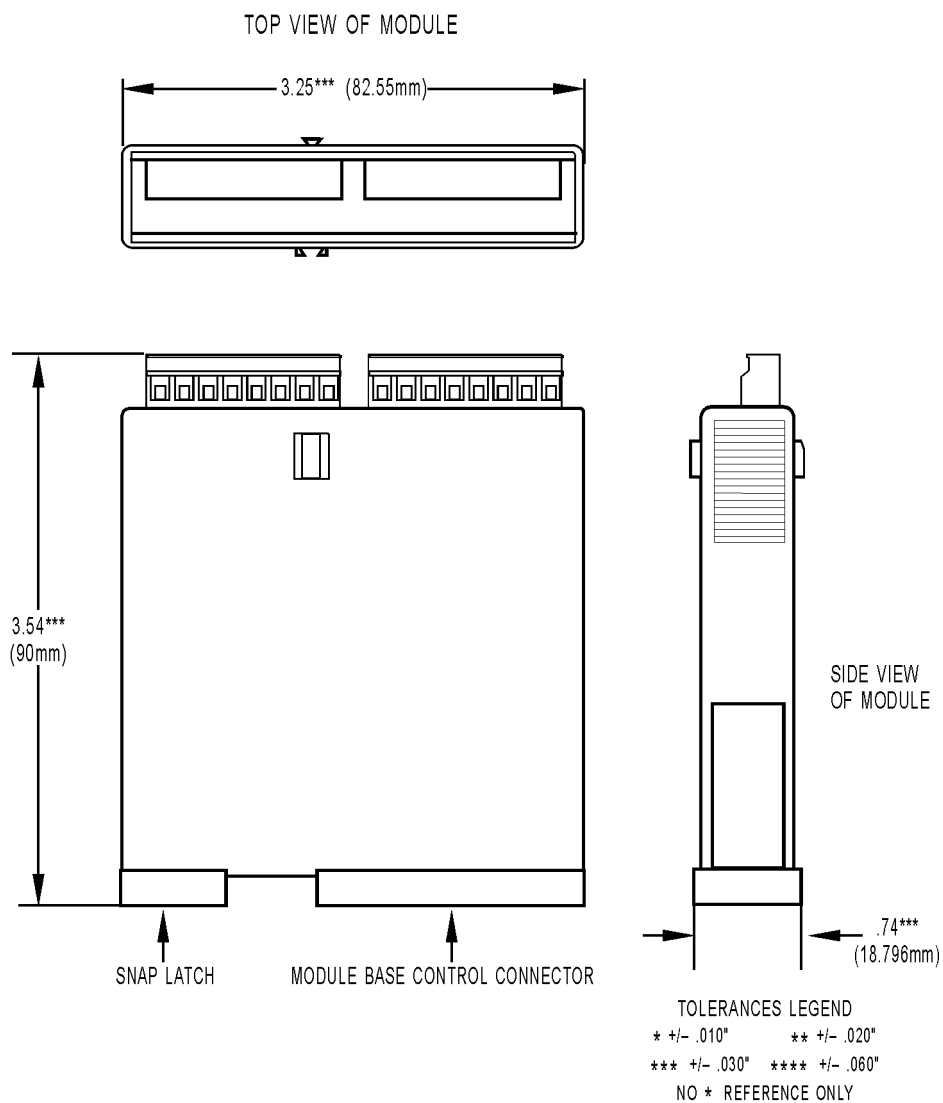

# SNAP Analog Input Modules

## Dimensional Drawing


### All 32-Channel Modules

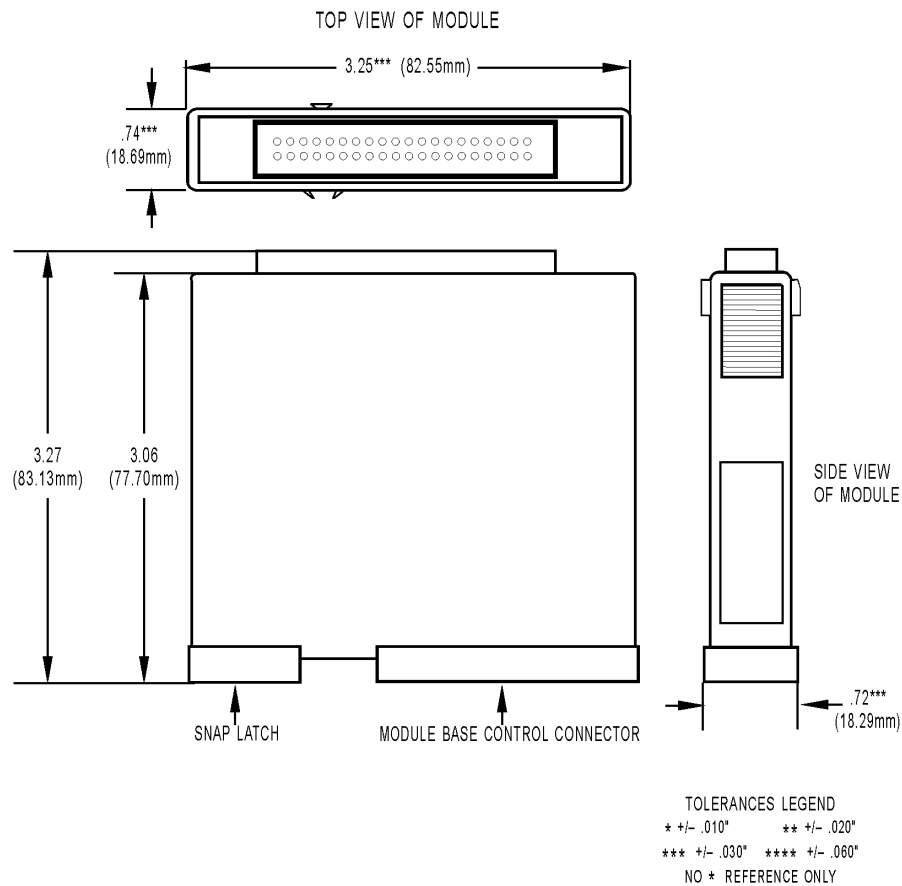

# SNAP Analog Input Modules

## Dimensional Drawing

### All Modules

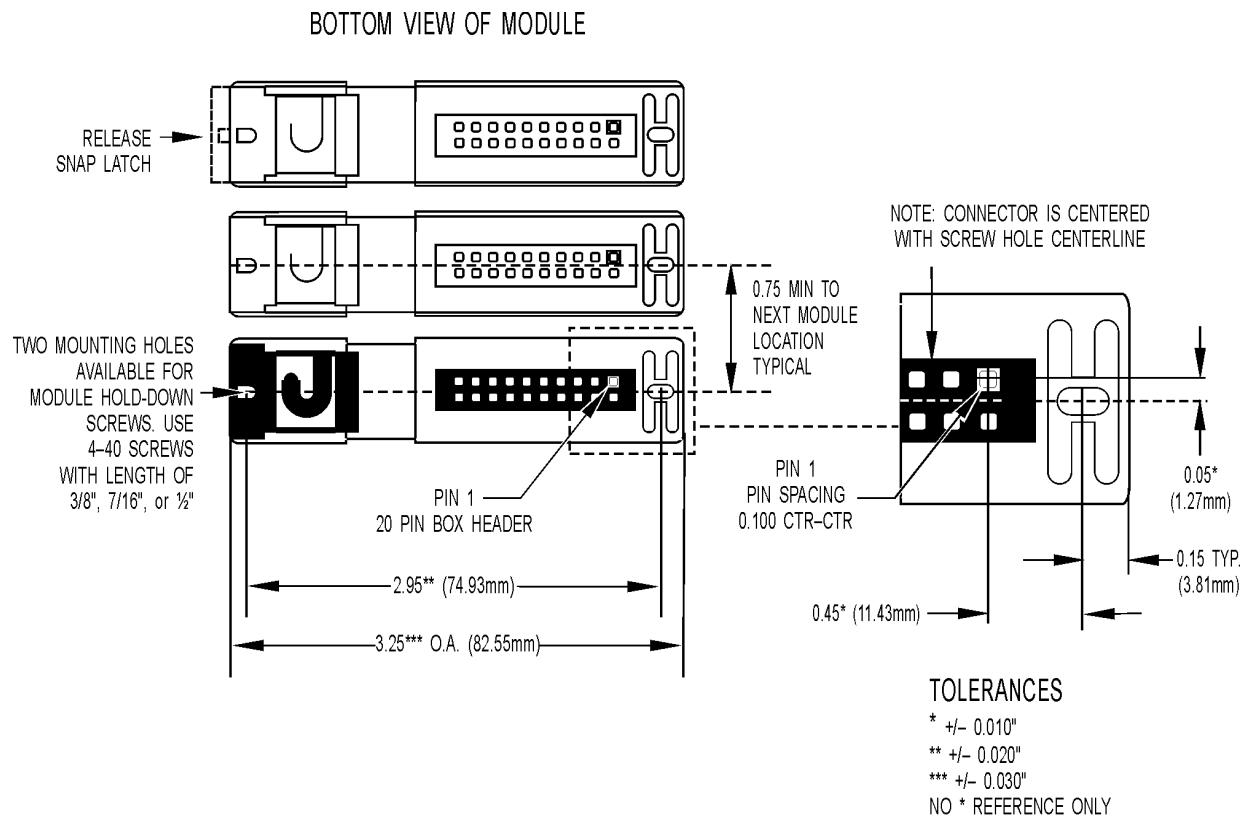


IMPORTANT: The mounting rack connector has 24 pins; the module connector has 20 pins. The extra pins on the mounting rack connector prevent misalignment of the module during installation.

# SNAP Analog Input Modules

## Dimensional Drawing


Height on Rack: All Two- and Four-channel Modules, except SNAP-AITM-2

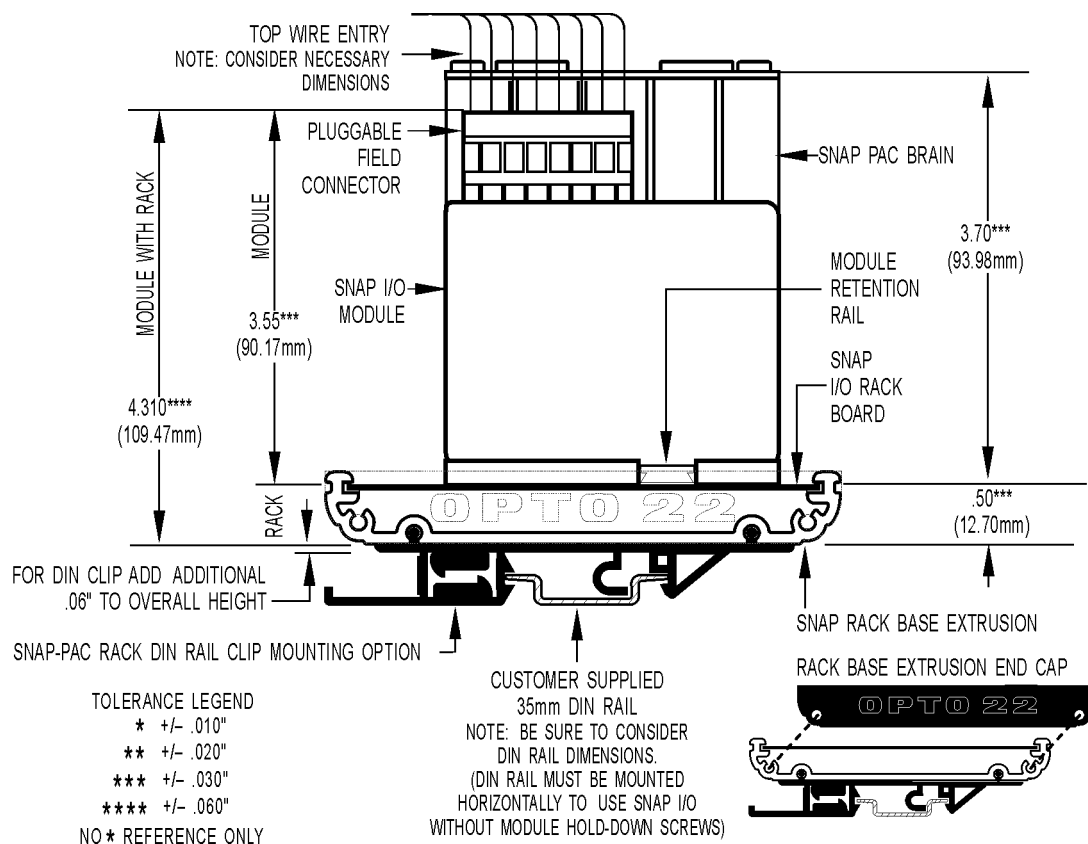

# SNAP Analog Input Modules

## Dimensional Drawing


### Height on Rack: 32-Channel Modules

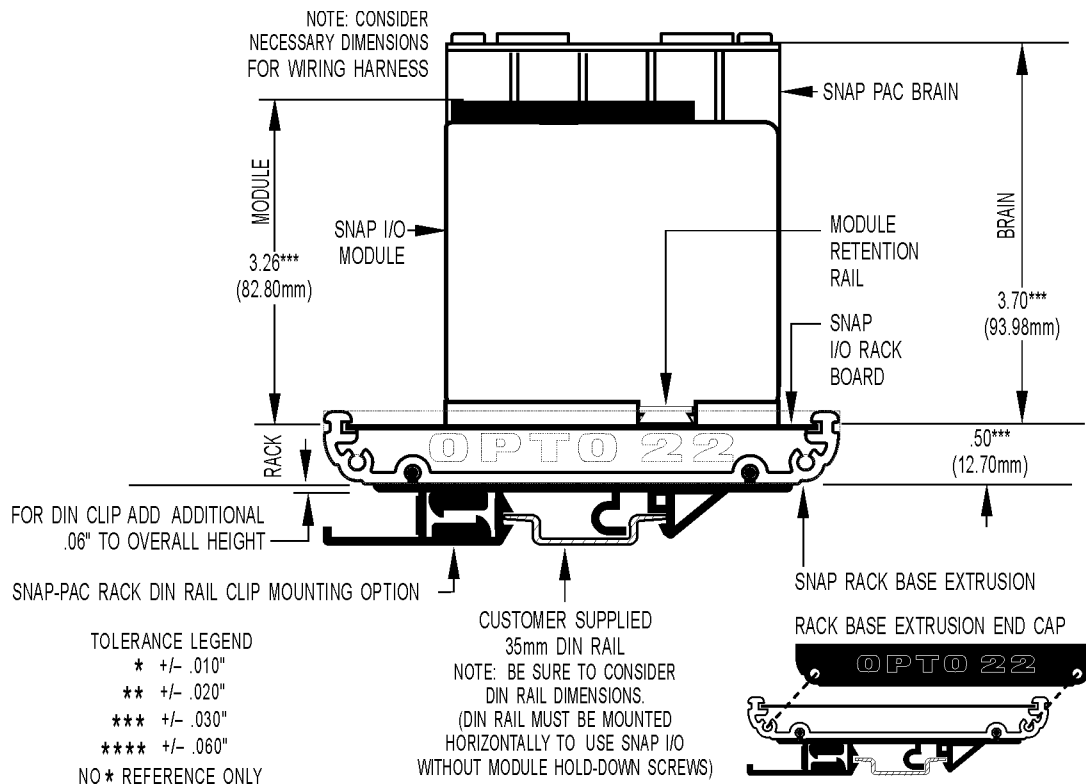

# SNAP Analog Input Modules

## Dimensional Drawing


### Height on Rack: SNAP-AITM-2 Module

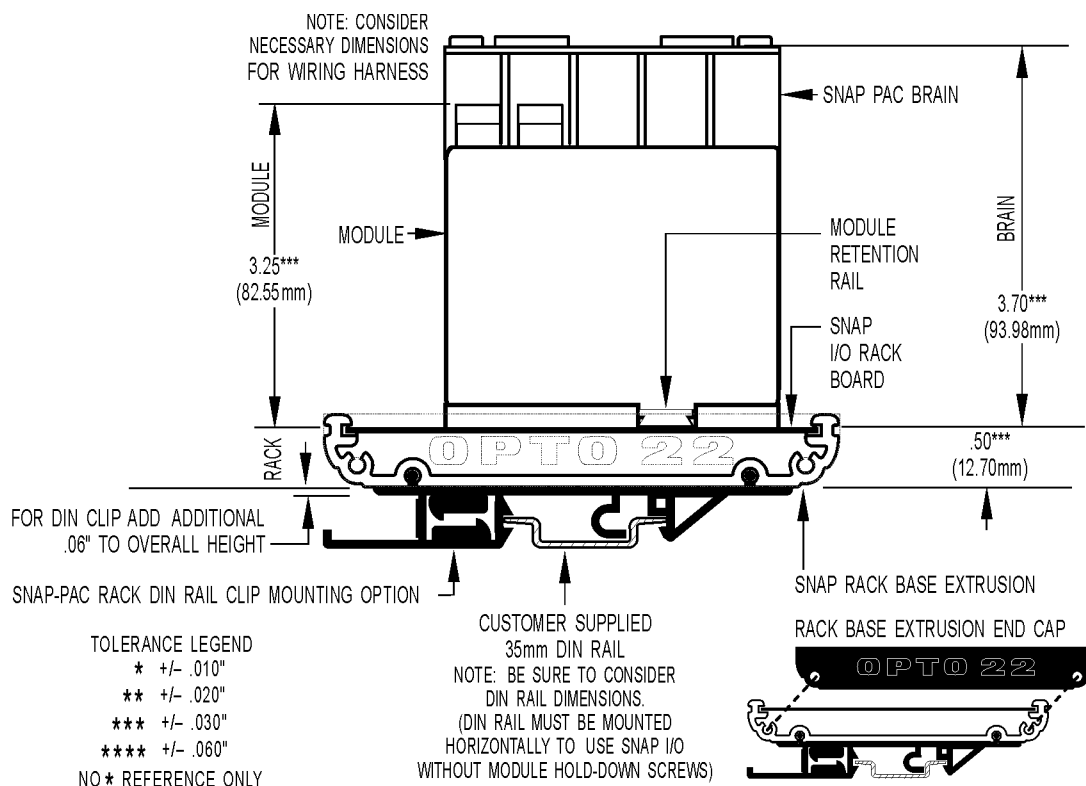

# SNAP Analog Input Modules

## Dimensional Drawing


Height on Rack: SNAP-AITM-8 and SNAP-AITM-8-FM Modules

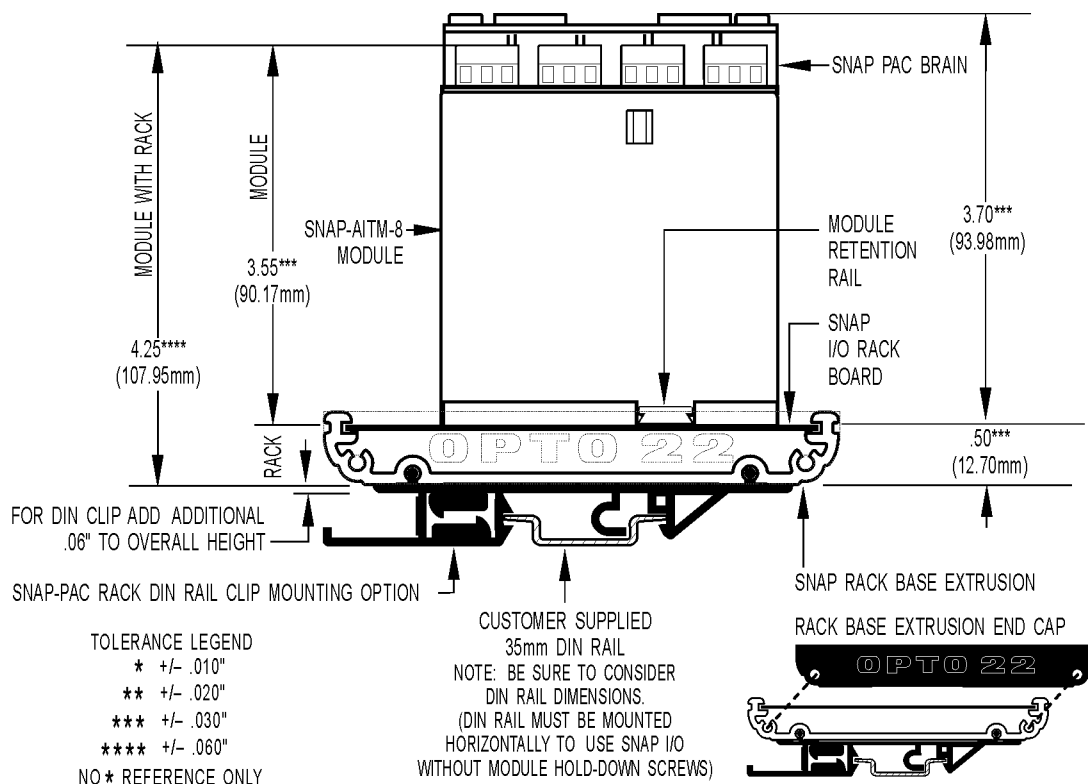

# SNAP Analog Input Modules

## Dimensional Drawing

Height on Rack: SNAP-AICTD-8, SNAP-AIMA-8, and SNAP-AIV-8

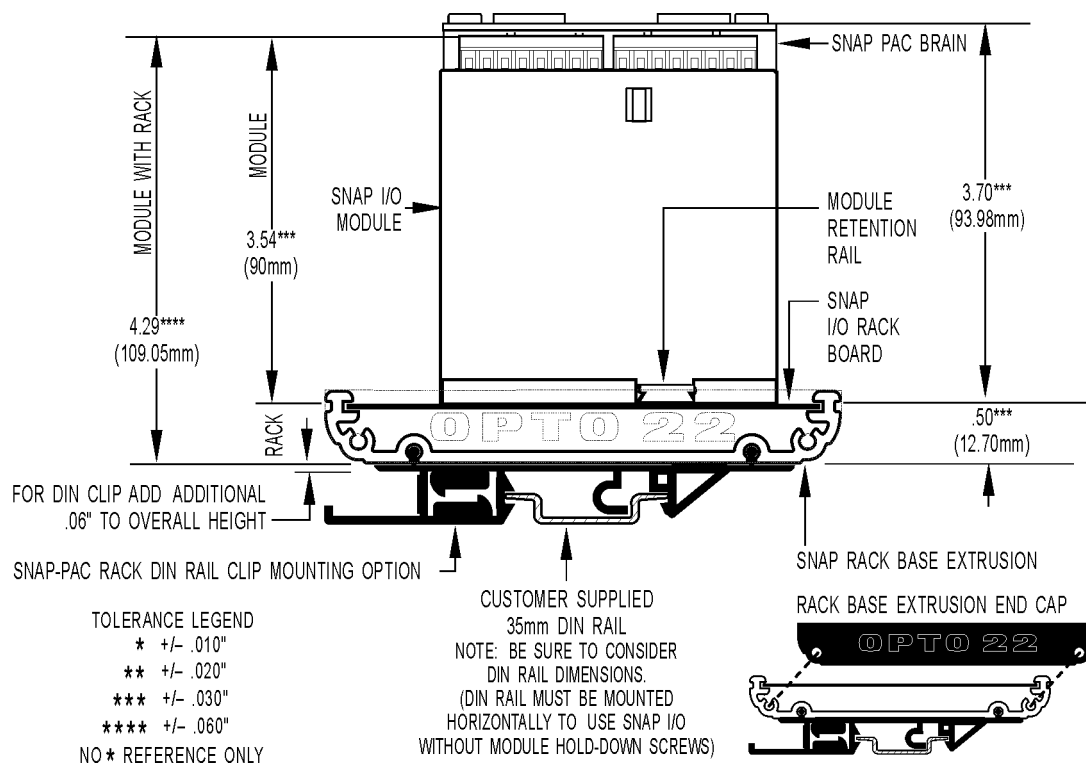

# More About Opto 22

## Products

Opto 22 develops and manufactures reliable, flexible, easy-to-use hardware and software products for industrial automation, energy management, remote monitoring, and data acquisition applications.

### groov

*groov* puts your system on your mobile device. With zero programming, you can build mobile operator interfaces to monitor and control systems from Allen-Bradley, Siemens, Schneider Electric, Modicon, and many more. Web-based *groov* puts mobile-ready gadgets at your fingertips. Tag them from your existing tag database, and they automatically scale for use on any device with a modern web browser. See [groov.com](http://groov.com) for more information and your free trial.

### SNAP PAC System

Designed to simplify the typically complex process of selecting and applying an automation system, the SNAP PAC System consists of four integrated components:

- SNAP PAC controllers
- PAC Project™ Software Suite
- SNAP PAC brains
- SNAP I/O™

### SNAP PAC Controllers

Programmable automation controllers (PACs) are multifunctional, modular controllers based on open standards.

Opto 22 has been manufacturing PACs for over two decades. The standalone SNAP PAC S-series, the rack-mounted SNAP PAC R-series, and the software-based SoftPAC™ all handle a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

SNAP PACs are based on open Ethernet and Internet Protocol (IP) standards, so you can build or extend a system easily, without the expense and limitations of proprietary networks and protocols. Wired+Wireless™ models are also available.

### PAC Project Software Suite

Opto 22's PAC Project Software Suite provides full-featured, cost-effective control programming, HMI (human machine interface) development and runtime, OPC server, and database connectivity software for your SNAP PAC System.

Control programming includes both easy-to-learn flowcharts and optional scripting. Commands are in plain English; variables and I/O point names are fully descriptive.

PAC Project Basic offers control and HMI tools and is free for download on our website, [www.opto22.com](http://www.opto22.com). PAC Project

Professional, available for separate purchase, adds one SoftPAC, OptoOPCServer, OptoDataLink, options for controller redundancy or segmented networking, and support for legacy Opto 22 serial *mistic*™ I/O units.

### SNAP PAC Brains

While SNAP PAC controllers provide central control and data distribution, SNAP PAC brains provide distributed intelligence for I/O processing and communications. Brains offer analog, digital, and serial functions, including thermocouple linearization; PID loop control; and optional high-speed digital counting (up to 20 kHz), quadrature counting, TPO, and pulse generation and measurement.

### SNAP I/O

I/O provides the local connection to sensors and equipment. Opto 22 SNAP I/O offers 1 to 32 points of reliable I/O per module, depending on the type of module and your needs. Analog, digital, and serial modules are all mixed on the same mounting rack and controlled by the same processor (SNAP PAC brain or rack-mounted controller).

## Quality

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California. Because we test each product twice before it leaves our factory, rather than only testing a sample of each batch, we can guarantee most solid-state relays and optically isolated I/O modules for life.

## Free Product Support

Opto 22's California-based Product Support Group offers free, comprehensive technical support for Opto 22 products. Our staff of support engineers represents decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Additional support is always available on our website: how-to videos, OptoKnowledgeBase, self-training guide, troubleshooting and user's guides, and OptoForums.

In addition, hands-on training is available for free at our Temecula, California headquarters, and you can [register online](#).

## Purchasing Opto 22 Products

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at 800-321-6786 or 951-695-3000, or visit our website at [www.opto22.com](http://www.opto22.com).

**[www.opto22.com](http://www.opto22.com)**

[www.opto22.com](http://www.opto22.com) • Opto 22 • 43044 Business Park Drive • Temecula, CA 92590-3614 • Form 1335-131203

SALES 800-321-6786 • 951-695-3000 • FAX 951-695-3095 • [sales@opto22.com](mailto:sales@opto22.com) • SUPPORT 800-835-6786 • 951-695-3080 • FAX 951-695-3017 • [support@opto22.com](mailto:support@opto22.com)

© 2014 Opto 22. All rights reserved. Dimensions and specifications are subject to change. Brand or product names used herein are trademarks or registered trademarks of their respective companies or organizations.

