


# VIPD138 & Lock Out Kits

Comprehensive solutions for safe isolation

Technical Data

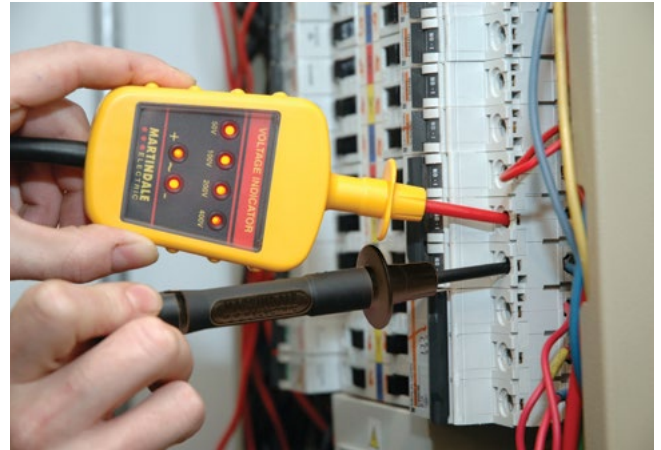

### Key features

- Unfused kit to comply with BS EN61243-3
- 50V – 600V AC/DC
- Polarity & Voltage indication from 12V
- Heavy duty double insulated cable with contrasting inner core
- Bright LED AC/DC voltage and polarity indication
- GS38 and BS EN61243-3 compliant
- 440V industry leading proving unit for all low and high impedance testers
- **Additional features VIPDLOK138**
- Includes the complete lock out kit in addition to the VI138 and PD440

### Additional features VIPDLOKPRO138

- This includes the full range of locking of devices
- Complies with Health & Safety recommendations for safe working practices

The Martindale package of VI-13800 Voltage Indicator and PD440 proving device is an essential safety aid for electricians, service and maintenance technicians and comes with a carry case (TC69). Safe isolation procedures require voltage indicators to be proved before and after use.

The complete solution for safe isolation, the VIPDLOK138 Lock Out Kit contains the VI13800 voltage indicator, PD440 proving device, along with a complete lock out kit, supplied in soft carry cases. The kit simplifies compliance with Health & Safety recommendations for safe working practices when maintaining or installing electrical plant and equipment.

The most comprehensive solution for safe isolation, the Martindale VIPDLOKPRO138 Lock Out Kit contains the VI13800 voltage indicator, matching PD440 proving device and LOKKITPRO which contains the full range of Martindale locking off devices, all supplied in two convenient soft carry cases. The kit simplifies compliance with Health & Safety recommendations for safe working practices when maintaining or installing electrical plant and equipment.

	VIPD138	VIIPDLOK138	VIIPDLOKPRO138
VI13800 Voltage Indicator	✓	✓	✓
PD440 Proving Unit	✓	✓	✓
TC69 Combination Carry Case	✓	✓	✓
LOKKIT1 12 Piece Kit		✓	
LOKKITPRO 17 Piece Kit			✓



**VI13800****Electrical**

Nominal voltage range: 50 - 600V DC/AC rms

Nominal voltage threshold indications:

50, 100, 200, 400 V DC/AC rms

Voltage threshold tolerance:

Conforms to BS EN 61243-3

Polarity & voltage indication:  $\geq 12V$  DC/AC rms

AC/DC voltage detection: automatic

Range detection: automatic

Response time:  $<0.1s$

Frequency range: DC, 1 - 400Hz

Test current:  $< 3.5mA$  at 600V DC/AC rms

Duty ratio: 30s ON (operated) / 240s OFF (recovery)

**Environmental**

Temperature & Humidity (Operating & Storage):  $-10^{\circ}C$  to  $55^{\circ}C \leq 85\%$  R.H.

Altitude: up to 2000m

**General**

Power: From circuit under test

Dimensions: 205(L) x 67(W) x 27(D) mm

Weight: 130g approx.

**Safety**

Conforms to BS EN 61243-3 CAT IV 600 V

Class II, Double Insulation

Pollution Degree 2

IP rating: IP54

**EMC**

Conforms to BS EN 61326-1

**PD440**

Output voltage: 440V nominal

Output frequency: 50Hz nominal

**Environmental**

Operating temperature:  $-10^{\circ}C$  to  $40^{\circ}C$  at max. 70% R.H.

Altitude: up to 2000m

Pollution degree: 2

**General**

Power: internal batteries or external power source

Internal batteries: 6 x 1.5V, AA alkaline batteries (IEC LR6, NEDA 15A)

External power source: 12V DC max. at 2A min.

External power socket: 2.5mm jack socket, centre positive

Dimensions: 143 x 84 x 50mm.

Weight packed: 400g approx. with batteries

Includes: 6 x 1.5V AA alkaline batteries, instructions

**VIPD138**

1 x Voltage Indicator (VI13800)

1 x Proving Device (PD440)

1 x Soft combination carry case (TC69)

**VIPDLOK138**

1 x Voltage Indicator (VI13800)

1 x Proving Device (PD440)

1 x Soft combination carry case (TC69)

The 15 piece lock off kit also contains the following items:

1 x Padlock with unique key (PAD10R)

1 x Steel safety hasp, with space for up to 6 padlocks (LOKHASP25)

1 x Green mini MCB lock (LOK1)

1 x Yellow mini MCB lock (LOK2)

1 x Blue medium MCB lock (LOK3)

1 x Red large MCB lock (LOK5)

1 x Red small MCB lock (LOK4)

1 x Red miniature push pin MCB lock (LOK11)

1 x Yellow push pin MCB lock (LOK10)

5 x Danger tags which can be overwritten (TAG4)

1 x Black marker for writing on Danger tags

1 x Soft carry case (TC55)

**VIPDLOKPRO138**

1 x Voltage Indicator (VI13800)

1 x Proving Device (PD440)

1 x Soft combination carry case (TC69)

The 20 piece lock off kit also contains the following items:

1 x Padlock with unique key (PAD10R)

1 x Steel safety hasp (LOKHASP25)

5 x Danger tags which can be overwritten (TAG4)

1 x Black marker pen (LOKMP)

1 x Cartridge fuse isolation lock (LOK6)

1 x Cable lock-off (CABLOK)

1 x Plunge locking piece (LOK15)

1 x Appliance plug lock out (PL13)

1 x MCB green isolation lock (LOK1)

1 x MCB yellow isolation lock (LOK2)

1 x MCB blue isolation lock (LOK3)

1 x MCB small red isolation lock (LOK4)

1 x MCB red isolation lock (LOK5)

1 x Slimline grey isolation lock (LOK7)

1 x Red miniature push pin MCB lock (LOK11)

1 x Yellow push pin MCB lock (LOK10)

1 x Soft carry case (TC68)

**Related products**

**VIPD150** Voltage Indicator VI-15000 (CAT IV 1000V) & Proving Device (690V)

**VIPDLOK150** Voltage Indicator, Proving Device & Lock Out Kit

**VIPDLOKPRO150** Voltage Indicator, Proving Device & PRO Lock Out Kit

**LOKKIT1** Comprehensive Lock Out Kit (12 piece)

**LOKKITPRO** Professional Lock Out Kit (17 piece)

**LOKKIT6** Universal Fuse Carrier Lock Out kit

Martindale Electric Co. Ltd.

Metrohm House, 12 Imperial Park,  
Imperial Way, Watford WD24 4PP.

T: 01923 441717 F: 01923 446900

[www.martindale-electric.co.uk](http://www.martindale-electric.co.uk)

[sales@martindale-electric.co.uk](mailto:sales@martindale-electric.co.uk)

**Ver. A2.0**

Due to policy of continuous development, Martindale Electric reserves the right to alter equipment specification and description outlined in this document without prior notice. No part of this document shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. © 2020 Martindale Electric Co. Ltd.